

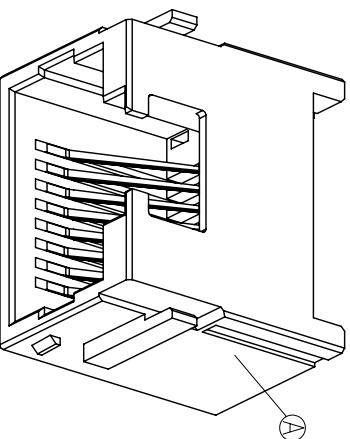
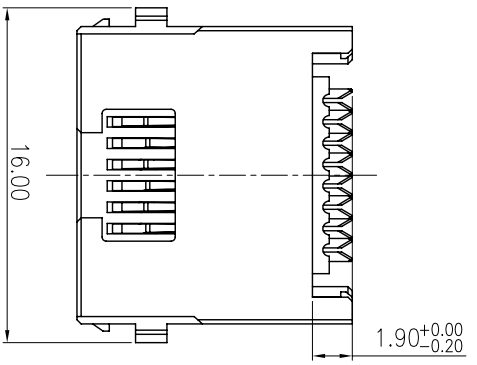


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	Fan Luo	2011.06.22
B	ECN:G120184 UPDATE DRAWING	DAOWEN	2012.06.11

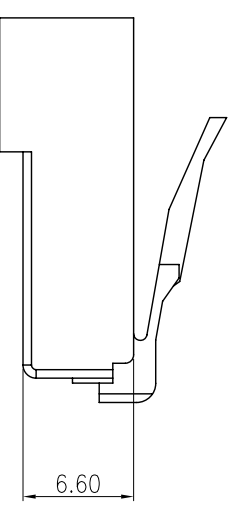

- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
 - 1-1. RATING: DC 115V, 1.5A Min.
 - 1-2. CONTACT RESISTANCE: 30 MILLIOHMS Max. FOR INITIAL 50 MILLIOHMS Max. AFTER 5000 CYCLES.
 - 1-3. INSULATION RESISTANCE: 100 MEGOHMS Min. BY 500V DC AFTER 1 MINUTE.
 - 1-4. DIELECTRIC WITHSTANDING VOLTAGE: 500V RMS AFTER 1 MINUTE.
 - INSERTION FORCE : 2.25KGF MAX;
 - LIFE TEST: 5,000 CYCLES MIN.
 - OTHER GENERAL SPEC. TO REFER "RW2101 SERIES SPEC."
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - HALOGEN FREE PRODUCT IDENTIFICATION MARK ON PRODUCT: ©
 - FOR REFLOW SOLDERING LEAD-FREE PROCESS.
 - PACKAGING: 9BAG

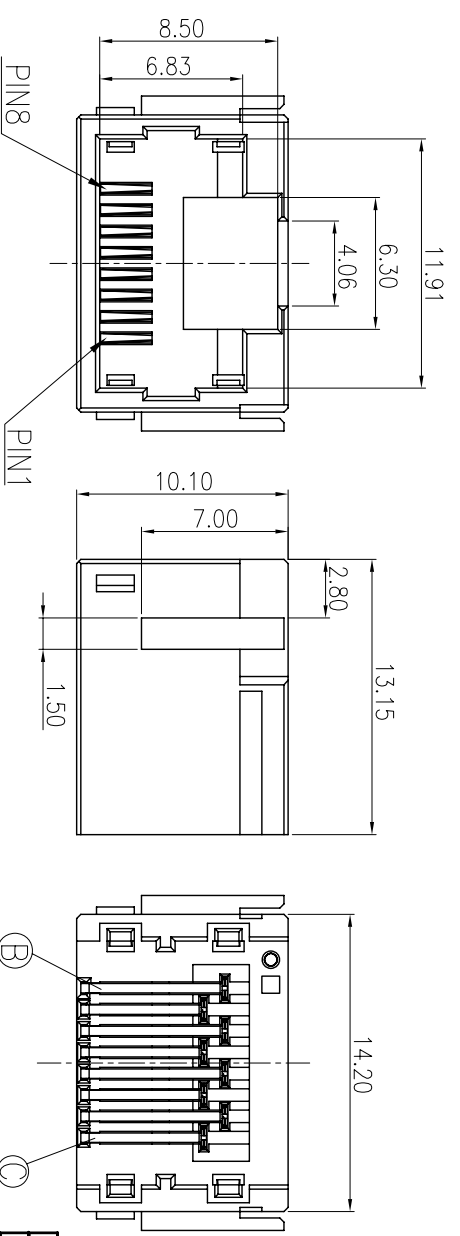

RJ STANDARD PLUG

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
C	TERMINAL 2	4	COOPER ALLOY 0.25T	Gold flash on contact area ,full Ni
B	TERMINAL 1	4	COOPER ALLOY 0.25T	Gold flash on contact area ,full Ni
A	BODY	1	THERMOPLASTIC	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES

 Singatron Enterprise Co., Ltd.
 信音企業股份有限公司

DECIMALS:	ANGLES:	TITLE
X : ±0.5	X : ±2°	RJ45 CONNECTOR
X.X : ±0.3	X.X : ±1'	DWN 20120611
X.XX : ±0.2		CHKD zzz 20120611
		APVD Luo 20120611

PART NO.	SCALE	UNIT	SHEET	REV.
2R12101-000111F	4:1	mm	1 OF 1	B

CUSTOMER COPY

