

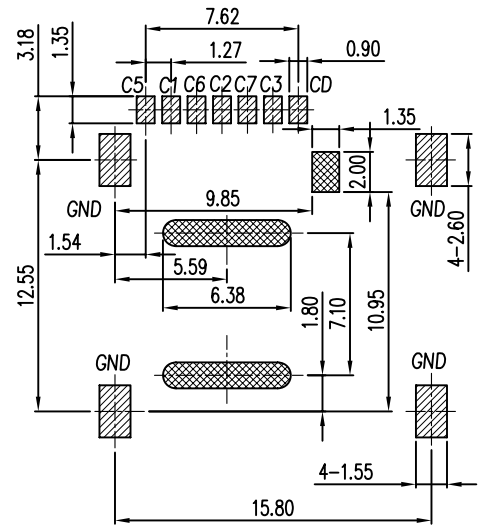
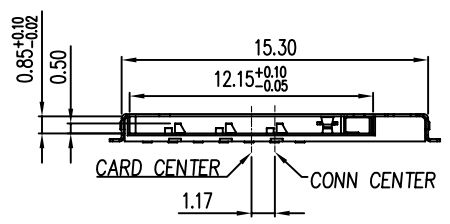
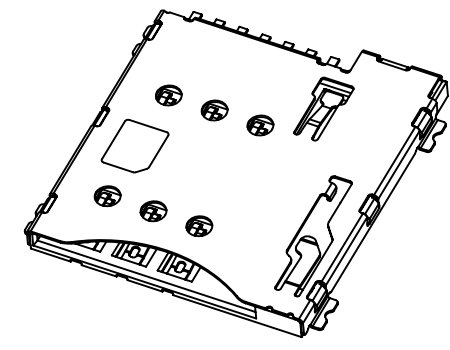
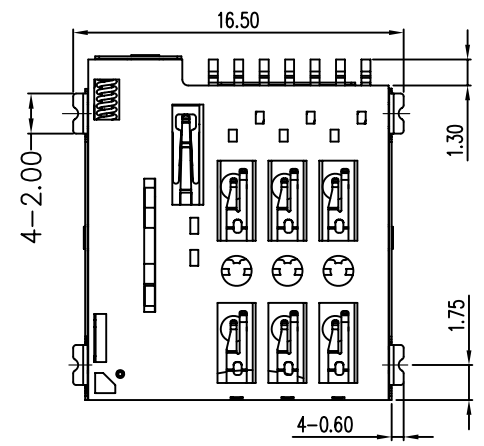
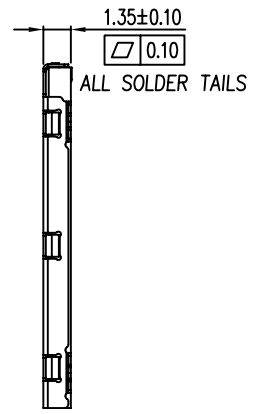



REV	LOCAS	DESCRIPTION	DRAW	DATE
01	NEW	INITIAL RELEASE	LITAO	2016.07.17
02		UPDATED	Andy	2017.07.17

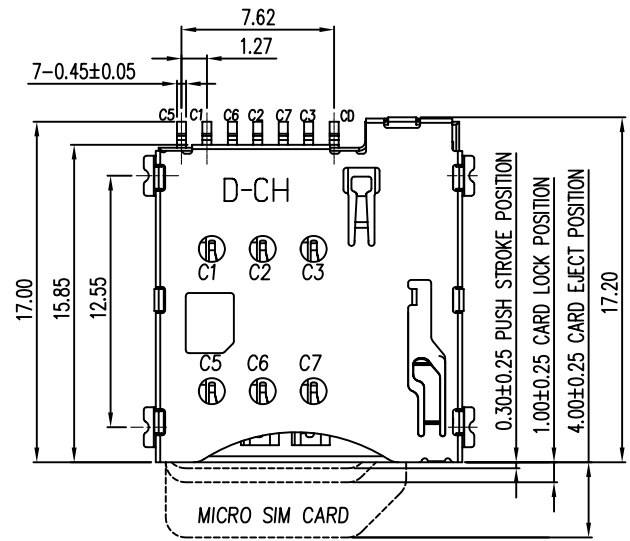

PIN No	DESCRIPTION
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O
CD	SWITCH

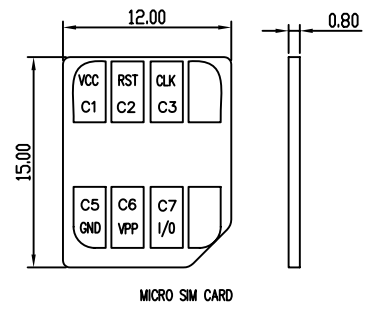

- Notes:
- Material:
 - Housing: High Temperature Thermoplastic UL94V-0; Color Black.
 - Terminal: Copper Alloy, T=0.12.
 - Shell: Stainless Steel, T=0.12.
 - Finish:
 - Terminal: Plated Gold on the Contact Area Matte Sn Plating on Solder Tails. Underplated Nickel Over all.
 - Shell: Plated Gold on Solder Tails Underplated Nickel Over all
 - Speciality:
 - Rated current: 1.0A
 - Rated voltage: 30V
 - Contact Resistance: 50mΩ MAX
 - Insulation Resistance: 100MΩ MIN 100V DC
 - Dielectric withstanding voltage: 250V AC.
 - Solder ability: 245 ± 5°C, 5 ± 0.5s.
 - Durability: 5000 Cycles.

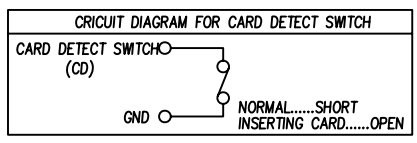

SMT SOLDER AREA
 CIRCUIT TRACE KEEP OUT AREA
 THERE SHOULD NOT BE ANY CIRCUITRIES IN THE LAYOUT SPACE OF THE PRODUCTS.
RECOMMENDED PCB LAYOUT
 GENERAL TOLERANCE ±0.05

UNLESS OTHERWISE SPECIFIED, TOLERANCE:
 X, ±0.25
 X.x, ±0.20
 X.xx, ±0.15
 ANGULAR ±3°

Singatron Enterprise Co., Ltd.				
TITLE	1.35H 7PIN PUSH PUSH MICRO SIM CARD			
DWN	LITAO	PART NO.	ZSA0701254135-91-01	
CHKD	2016.07.17	SCALE 1:1	UNIT: mm	
APVD		SIZE: A3	SHEET: 1 OF 1	REV: 02
CUSTOMER COPY				