


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
B	ECN NO:920008	EVEN	2005.10.11

SPECIFICATION:




- CONTACT RESISTANCE: 20 mΩ MAX.
- INSULATION RESISTANCE: 100 MΩ MIN. AT 250V DC.
- DIELECTRIC STRENGTH: 250V AC 1 MINUTE.
- LIFE TEST:
JACK SHALL WITHSTAND 5000 CYCLES OF INSERTION AND WITHDRAWAL WITH TESTING PLUG, AFTER TEST THE CONTACT RESISTANCE SHALL NOT EXCEED 0.1Ω
- MEASURING CONDITION: TEMPERATURE: FROM 5°C TO 35°C
RELATIVE HUMIDITY: FROM 40% TO 85%
- ELECTRICAL CIRCUIT.



- INSERTION FORCE: 0.4Kg~1.6Kg.
- WITHDRAWAL FORCE: 0.4Kg~1.2Kg.
- TO CONFORM TO THE "SE-01-001" & "ROHS DIRECTIVE"
- GREEN PRODUCT IDENTIFICATION MARK IN JACK:
- GREEN PRODUCT IDENTIFICATION LABEL IN PACKING: **G.P. PASS**
- FOR LEAD-FREE PRODUCT.
- SOLDER HEAT RESISTANCE: WAVE SOLDERING 260°C 10SECS.
- MARKING: MARK "SWITCHCRAFT" ON REAR OF CONNECTOR.

G	COIL SPRING	1	SWRS	
F	METAL	1	BRASS	NICKEL PLATING
E	TERMINAL	1	BRASS 0.3t	SILVER PLATING
D	TIP SPING	1	BRASS 0.3t	SILVER PLATING
C	SHUNT TERMINAL	1	BRASS 0.3t	SILVER PLATING
B	COVER	1	POLYCARBONATE UL 94V-2	TRANSPARENT
A	BODY	1	PBT UL 94V-0	BLACK COLOR
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES		Singatron Enterprise Co., Ltd. 信音企業股份有限公司	
DECIMALS:	ANGLES:	TITLE	3.5φ EARPHONE JACK
X : ±0.5	X : ±2°	DWN	EVEN 2005.10.8 PART NO. 2SJ-03603T33
X.X : ±0.3	X.X : ±1°	CHKD	KAN 2005.10.12 SCALE: 4/1 UNIT: mm
X.XX : ±0.2		APVD	ALAN 2005.10.13 SIZE: A3 SHEET: 10F1 REV: B
CUSTOMER COPY			

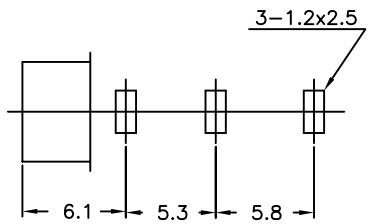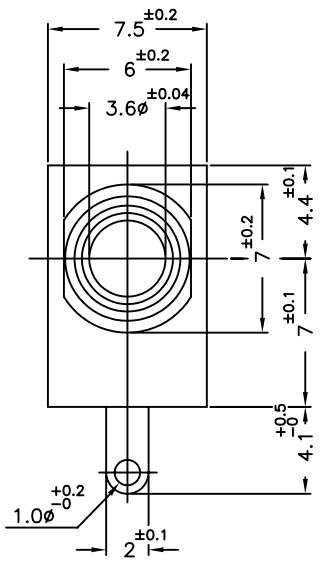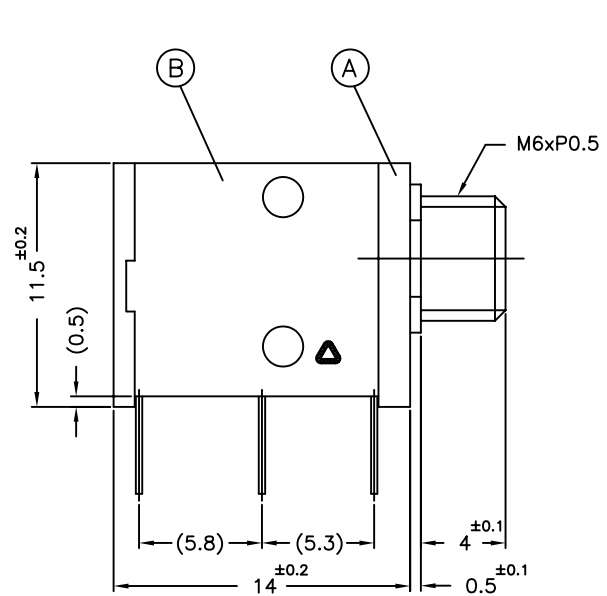

PCB LAYOUT TOL.±0.05

