

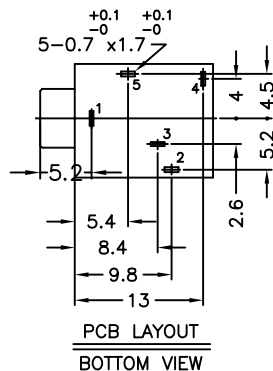
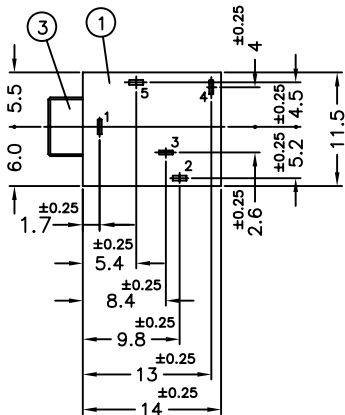

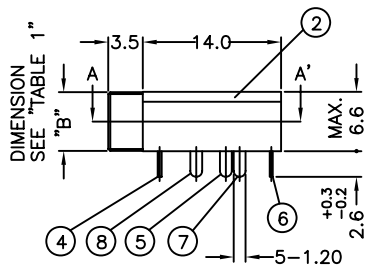


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASED	HARVEY	09.10.29

SPECIFICATION:

- CONTACT RESISTANCE: 20 mΩ MAX.
- INSULATION RESISTANCE: 100 MΩ MIN. AT 250V DC.
- DIELECTRIC STRENGTH: 250V AC 1 MINUTE.
- LIFE TEST:  
JACK SHALL WITHSTAND 5000 CYCLES OF INSERTION AND WITHDRAWAL WITH TESTING PLUG, AFTER TEST THE CONTACT RESISTANCE SHALL NOT EXCEED 0.1
- MEASURING CONDITION:  
TEMPERATURE: FROM 5°C TO 35°C  
RELATIVE HUMIDITY: FROM 40% TO 85%
- INSERTION FORCE: 0.4Kg~1.6Kg.
- WITHDRAWAL FORCE: 0.4Kg~1.4Kg.
- TO CONFORM TO THE "SE-01-001" & "ROHS DIRECTIVE"
- GREEN PRODUCT IDENTIFICATION MARK IN JACK:  **G.P. PASS**
- GREEN PRODUCT IDENTIFICATION LABEL IN PACKING: **G.P. PASS**
- FOR LEAD-FREE PROCESS.



CIRCUIT: FIG. 1

10	COIL SPRING B	1	SUS 0.3φ	
9	COIL SPRING A	1	SUS 0.25φ	
8	TIP SPRING	*	BRASS 0.3t	SILVER PLATING
7	RING SPRING	*	PHOSPHOR BRONZE 0.25t	SILVER PLATING
6	CONTACT B	*	BRASS 0.3t	SILVER PLATING
5	CONTACT A	*	BRASS 0.3t	SILVER PLATING
4	EARTH TERMINAL	1	BRASS 0.4t	SILVER PLATING
3	METAL	1	BRASS	NICKEL PLATING
2	COVER	1	POLYCARBONATE TRANSPARENT UL 94V-2	
1	BODY	1	PBT UL 94V-0	BLACK COLOR
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: X :±0.5  
X.X :±0.3  
X.XX :±0.2

ANGLES: X :±2'  
X.X :±1'

 Singatron Enterprise Co., Ltd.  
信音企業股份有限公司

TITLE	3.5φ STEREO JACK		
DWN	harvey	<b>PART NO.2SJ-0362-T04</b>	
CHKD		SCALE:2/1	UNIT: MM
APVD	Robin	SIZE: A3	SHEET:1 OF 1
REV: A			
CUSTOMER COPY			

"TABLE 1"

DRAWING (NEW NO.)	DRAWING (OLD NO.)	CIRCUIT FIG.	" B " DIMENSION	TIP SPRING	RING SPRING	CONTACTOR A	CONTACTOR B
2SJ-0362-T04		FIG. 1	6φ±0.1	1	1	1	1

Form: 1

132.53