
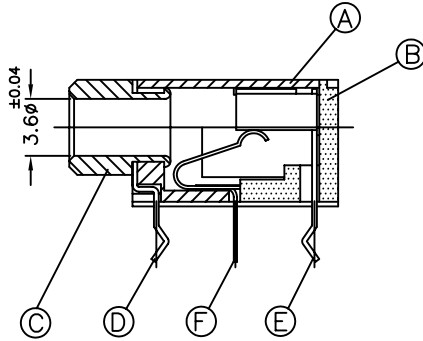

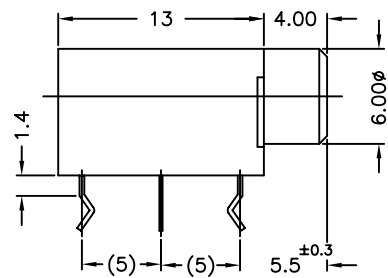



1 2 3 4 5 6 7 8

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
C	1. ADD MEETING PLUG 2. ADD THE GREEN REMARK AND DESCRIPTION	Connie	10/1-'04
D	ECN NO. T060242	JACKY	2006.10.25
E	更正品名 ECN NO. C070289	伍壯志	11/30'07



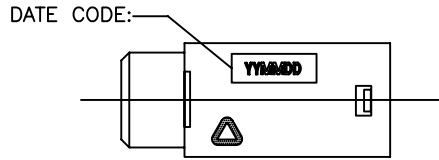


**SPECIFICATION:**


- CONTACT RESISTANCE: 30 mΩ MAX.
- INSULATION RESISTANCE: 100 MΩ MIN. AT 250V DC.
- DIELECTRIC STRENGTH: 250V AC 1 MINUTE.
- LIFE TEST:  
JACK SHALL WITHSTAND 5000 CYCLES OF INSERTION AND WITHDRAWAL WITH TESTING PLUG, AFTER TEST THE CONTACT RESISTANCE SHALL NOT EXCEED 0.1Ω
- MEASURING CONDITION:  
TEMPERATURE: FROM 5°C TO 35°C  
RELATIVE HUMIDITY: FROM 40% TO 85%
- ELECTRICAL CIRCUIT.



- INSERTION FORCE: 0.4Kg ~ 1.6Kg.
- WITHDRAWAL FORCE: 0.4Kg ~ 1.6Kg.
- SOLDERING CONDITION: WAVE SOLDERING.
- TO CONFORM TO THE "SE-01-001" & "THE EUROPEAN RESTRICTIONS-ON HAZARDOUS SUBSTANCES (ROHS) DIRECTIVE"
- GREEN PRODUCT IDENTIFICATION MARK IN JACK:
- GREEN PRODUCT IDENTIFICATION LABEL IN PACKING: **G.P. PASS**
- PRINTED DATE CODE "YYMMDD"

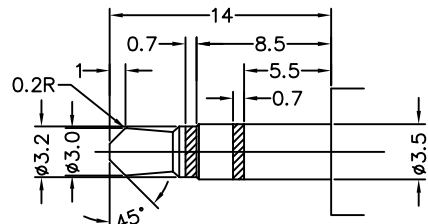

MEETING PLUG  
SINGATRON P/N:2SP-353P-001



NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
F	TERMINAL	1	COPPER ALLOY 0.2T	SILVER PLATING
E	SHUNT TERMINAL	1	BRASS 0.3t	SILVER PLATING
D	EARTH TERMINAL	1	BRASS 0.3t	SILVER PLATING
C	METAL	1	BRASS	NICKEL PLATING
B	COVER	1	PBT UL 94V-0	BLACK COLOR
A	BODY	1	PBT UL 94V-0	BLACK COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES		Singatron Electronic(Chung-Shan) Co., Ltd. 信音電子(中山)有限公司		
DECIMALS:	ANGLES:	TITLE	3.5φ PHONE JACK	
X :±0.5	X :±2'	DWN	伍壯志 11/20/07 <b>PART NO: 2SJ-03702N23</b>	
X.X :±0.3	X.X :±1'	CHKD	劉木遠 12/14/07 SCALE:N/A UNIT: mm	
X.XX :±0.2		APVD	SEAN 12/14/07 SIZE: A3 SHEET: 10F1 REV: E	
<b>CUSTOMER COPY</b>				

F

E

D

C

B

A

F

E

D

C

B

A

1 2 3 4 5 6 7 8