

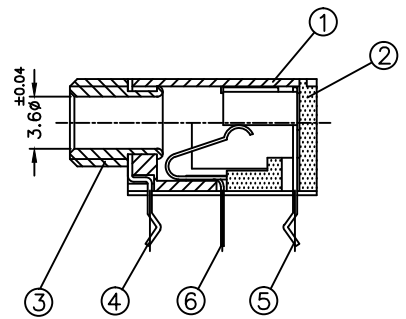

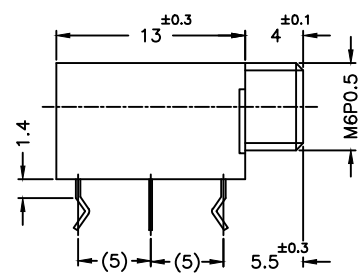






REV.	ECN NO OR DESCRIPTION	REVISED	DATE
C	ECN NO: 920008	EVEN	2006.2.6
D	ADD DATE CODE	HAIHUA	7/30'07
E	ECN NO:S202011-R06	Xinzhi	20201203



- SPECIFICATION:
- CONTACT RESISTANCE: 30 mΩ MAX.
 - INSULATION RESISTANCE: 100 MΩ MIN. AT 250V DC.
 - DIELECTRIC STRENGTH: 250V AC 1 MINUTE.
 - LIFE TEST:
JACK SHALL WITHSTAND 5000 CYCLES OF INSERTION AND WITHDRAWAL WITH TESTING PLUG, AFTER TEST THE CONTACT RESISTANCE SHALL NOT EXCEED 0.1
 - MEASURING CONDITION:
TEMPERATURE: FROM 5°C TO 35°C
RELATIVE HUMIDITY: FROM 40% TO 85%
 - ELECTRICAL CIRCUIT.



- INSERTION FORCE: 0.4Kg~1.6Kg.
- WITHDRAWAL FORCE: 0.4Kg~1.6Kg.
- SOLDER HEAT RESISTANCE: WAVE SOLDERING 260°C 10SECS.
- TO CONFORM TO THE "SE-01-001" & "ROHS DIRECTIVE"
- GREEN PRODUCT IDENTIFICATION MARK IN JACK:
- GREEN PRODUCT IDENTIFICATION LABEL IN PACKING: G.P. PASS
- FOR WAVE SOLDERING LEAD-FREE PROCESS.
- PRINTED DATE CODE "YYMMDD" ON TOP OF CONNECTOR.

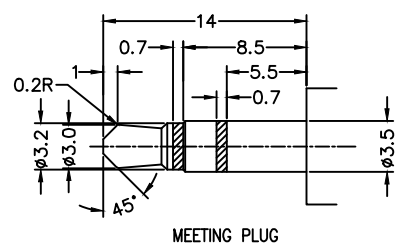

NO	DESCRIPTION	QTY	MATERIAL	PLATING&COLOR
6	TERMINAL	1	TI-CU ALLOY 0.2T	SILVER PLATING
5	SHUNT TERMINAL	1	BRASS 0.3t	SILVER PLATING
4	EARTH TERMINAL	1	BRASS 0.3t	SILVER PLATING
3	METAL	1	BRASS	NICKEL PLATING
2	COVER	1	PBT UL 94V-0	BLACK COLOR
1	BODY	1	PBT UL 94V-0	BLACK COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

Singatron Electronic(Chung-Shan) Co., Ltd.
信音電子(中山)有限公司

DECIMALS:	ANGLES:	TITEL	3.5φ EARPHONE JACK		
X : ±0.3	X : ±1°	DWN Xinzhi	PART NO.	2SJ-03702T23	
X.X : ±0.2	X.X : ±0.5°	CHKD Bruce	SCALE:	N/A	UNIT: mm
X.XX : ±0.1		APVD Liao	SIZE:	A4	SHEET: 10F1
X.XXX : ±0.05					REV: E

CUSTOMER COPY