
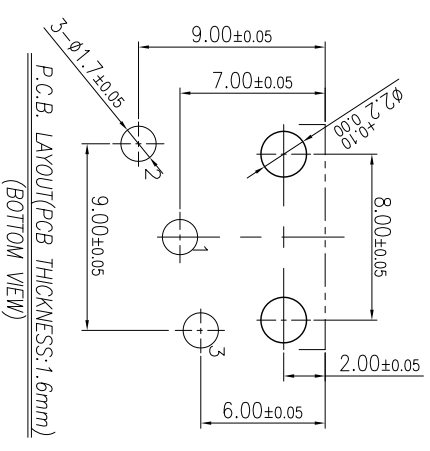
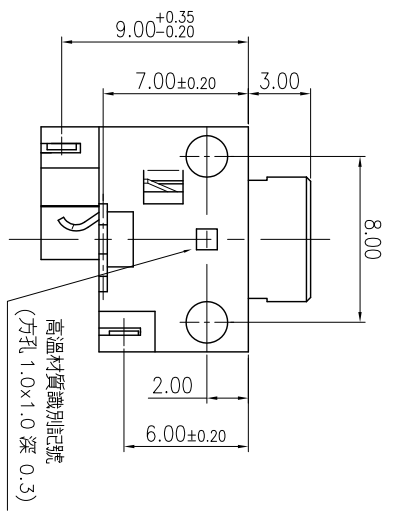


CIRCUIT

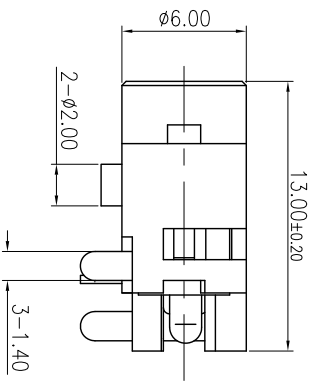

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
A	INITIAL RELEASE	許海華	2008.04.22
B	ECN NO. C080080-1/6 應客戶要求修改尺寸	許海華	5/6/08
C	ECN NO. C100404 Add Dimension	LONGJIANG	2010.12.28

SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS:
 - RATING: 24V 1A
 - DIELECTRIC WITHSTANDING VOLTAGE: 250V AC FOR 1 MINUTE.
 - INSULATION RESISTANCE: 50MΩ MIN. MEASURED BY 500 VDC
- MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE : 0.3KG - 1.6KG
 - WITHDRAWAL FORCE : 0.3KG - 1.4KG
- LIFE TEST: 5,000 CYCLES MIN.
- TO CONFORM TO THE SINGATRON HSF SPEC.
- GREEN PRODUCT IDENTIFICATION MARK ON JACK:
- GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **G.P. PASS**
- FOR WAVE SOLDERING LEAD-FREE PROCESS.
- PRINTED DATE CODE "YYMMDD" ON TOP OF CONNECTOR.



NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
D	RING SPRING	1	PHOSPHOR BRASS 0.2t	SILVER PLATING
C	TIP SPRING	1	PHOSPHOR BRASS 0.3t	SILVER PLATING
B	EARTH TERMINAL	1	PHOSPHOR BRASS 0.4t	SILVER PLATING
A	BODY	1	HIGH TEMP.THERMOPLASTIC	SEE TABLE

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X : ±0.5 X : ±2°
 X.X : ±0.3 X.X : ±1°
 X.XX : ±0.2

Singatron Enterprise Co., Ltd.
 信音企業股份有限公司

TITLE: 3.5φ PHONE JACK

DWM Longjiang 11.01.03 PART NO. 2SJ-0380-A0X
 CHKD ZZZ 11.01.03 SCALE 4:1 UNIT: mm
 APVD lao 11.01.03 SIZE: A4 SHEET: 10F1 REV: C

CUSTOMER COPY