
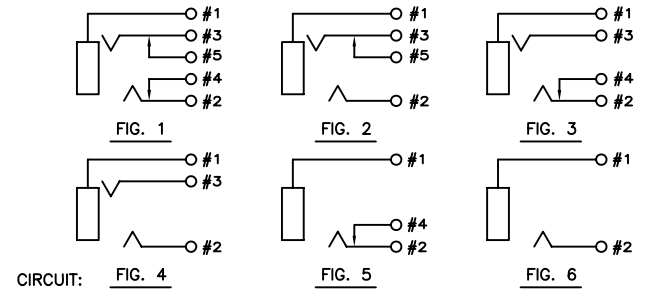


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCED RELEASED	ROY	2006.05.02
B	修改圖面與實物相符 ECN No.:C080275-5/9	CHARLIE	2009.01.14

SPECIFICATIONS:


- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 30mΩ MAX.(INITIAL)
 - DIELECTRIC WITHSTANDING VOLTAGE: 250V AC FOR ONE MINUTE
 - INSULATION RESISTANCE: 50MΩ MIN. MEASURED BY 250 VDC
- MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE : 0.2~2.5 KGF
 - WITHDRAWAL FORCE : 0.2~2.5 KGF
- LIFE TEST: 5,000 CYCLES MIN.
- TO CONFORM TO THE SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- GREEN PRODUCT IDENTIFICATION MARK ON JACK:
- GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **G.P. PASS**
- FOR WAVE SOLDERING LEAD-FREE PROCESS.

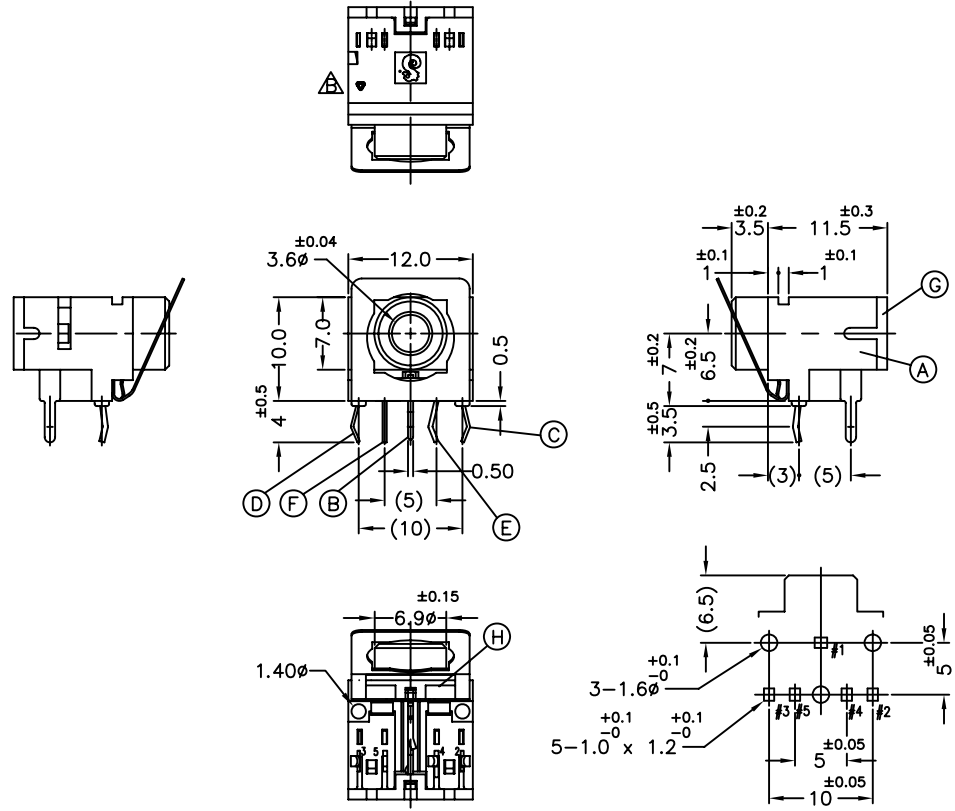

PCB LAYOUT
SOLDER SIDE

"TABLE 1"

DRAWING (NEW NO.)	CIRCUIT	TIP SPRING	RING SPRING	SHUT TERMINAL A	SHUT TERMINAL B
2SJ-0510-A15	FIG. 1	1	1	1	1
2SJ-0511-A15	FIG. 2	1	1		1
2SJ-0512-A15	FIG. 3	1	1	1	
2SJ-0513-A15	FIG. 4	1	1		
2SJ-0514-A15	FIG. 5	1		1	
2SJ-0515-A15	FIG. 6	1			



NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
H	GROUNDING SPRING	1	STAINLESS STEEL 0.2t	
G	COVER	1	THERPLASTIC	BLACK COLOR
F	SHUNT TERMINA-B	*	COPPER ALLOY 0.4T	SILVER PLATING
E	SHUNT TERMINA-A	*	COPPER ALLOY 0.4T	SILVER PLATING
D	RING SPRING	*	COPPER ALLOY 0.25t	SILVER PLATING
C	TIP SPRING	*	COPPER ALLOY 0.3t	SILVER PLATING
B	EARTH TERMINAL	1	COPPER ALLOY 0.5t	SILVER PLATING
A	BODY	1	THERPLASTIC	BLACK COLOR
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X :±0.5 X :±2'				
X.X :±0.3 X.X :±1'				
X.XX :±0.2				
TITLE			3.5φ PHONE JACK	
DWN	CHARLIE	PART NO. 2SJ-051X-A15		
CHKD	RYAN	SCALE 2:1	UNIT: mm	
APVD	ROBIN	SIZE: A3	SHEET: 10F1	REV: B
CUSTOMER COPY				