

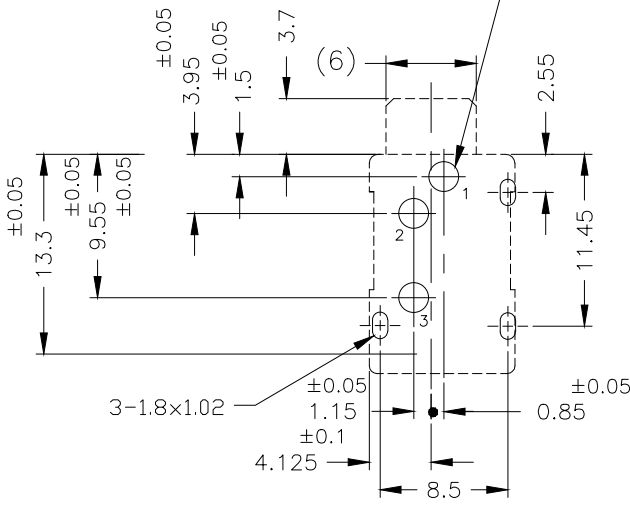
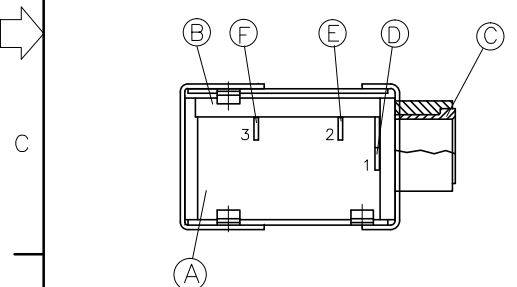


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
C	ECN NO.:T0900047	KENSON	9/19/09
D	ECN NO.:T0900047 2SJ-437X-F02	HAODU	2010.5.21
E	ECN: S170135-Q	YUREN	2017.5.2

SPECIFICATIONS:

- ELECTRICAL REQUIREMENTS:
 - CURRENT CARRYING RATING: 24V DC 2AMP MAX.
 - CONTACT RESISTANCE:
 - INITIAL (BEFORE ANY TESTING): 20 MILLIOHMS MAX.
 - AFTER 500 CYCLES TEST: 50 MILLIOHMS MAX.
 - INSULATION RESISTANCE: 50 MEGOHMS MIN. AT 500V DC.
 - DIELECTRIC WITHSTANDING VOLTAHE: 250V AC FOR 1 MINUTE.
- MECHANICAL REQUIREMENTS:
 - INSERTION FORCE: 0.4KG - 1.6KG
 - WITHDRAWAL FORCE: 0.4KG - 1.4KG
 - MECHANICAL LIFE CYCLES: AFTER 5,000 CYCLES WITHOUT BREAKDOWN.
- MARKING: MARK "S" ON REAR OF CONNECTOR.

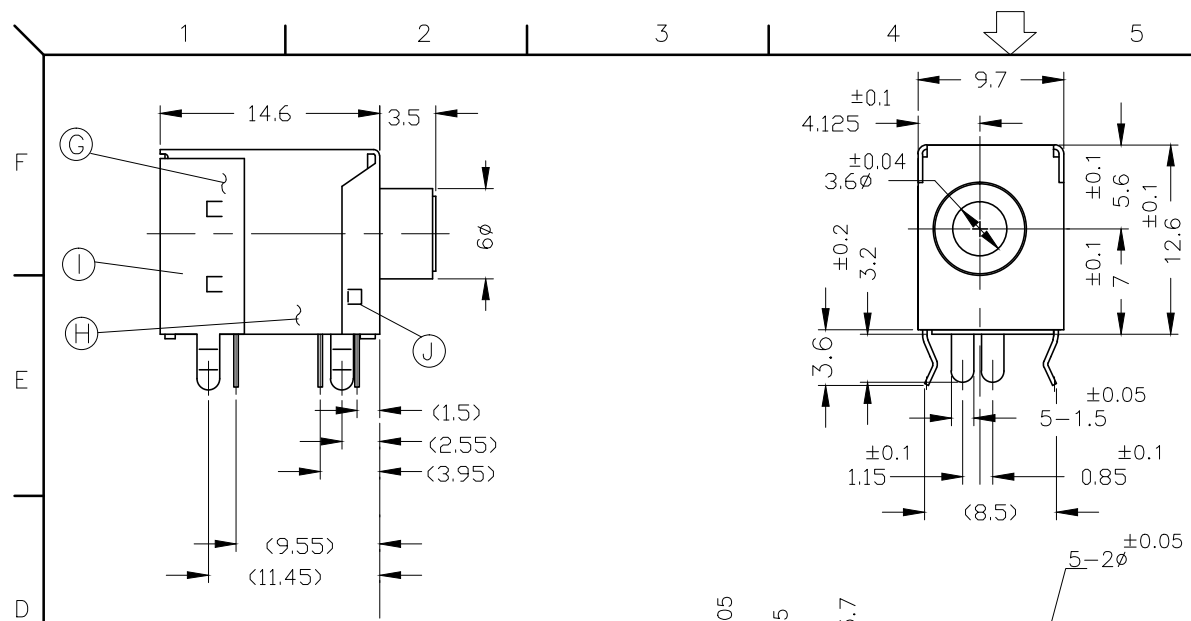

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
J	SHIELDING B	1	SPCC 0.3t	可焊Ni 60u"Min
I	SHIELDING A	1	SPCC 0.3t	可焊Ni 60u"Min
H	COIL SPRING-B	1	SUS	
G	COIL SPRING-A	1	SUS	
F	RING SPRING	1	BRASS 0.25t	SILVER PLATING
E	TIP SPRING	1	BRASS 0.3t	SILVER PLATING
D	EARTH TERMINAL	1	BRASS 0.3t	SILVER PLATING
C	METAL	1	BRASS	NICKEL PLATING
B	COVER	1	POLYCARBONATE UL 94V-0	TRANSPARENT
A	BODY	1	PBT UL 94V-0	PINK COLOR (PANTONE NO. 701C)

UNLESS OTHERWISE SPECIFIED TOLERANCES		SINGATRON ENTERPRISE CO., LTD. 信音企業股份有限公司	
DECIMALS:	ANGLES:	TITLE	3.5φ PHONE JACK
X :±0.5	X :±2°	DWN	YUREN PART NO. 2SJ-4373-F02
X.X :±0.3	X.X :±1°	CHKD	CERRY SCALE 1:1 UNIT: mm
X.XX :±0.2		APVD	LIAO SIZE: A3 SHEET: 10F1 REV: E
CUSTOMER COPY			