


- SPECIFICATIONS:**
- ELECTRICAL CHARACTERISTICS:
 - RATING: 12V 1A
 - CONTACT RESISTANCE: 30mΩ MAX(BEFORE),
 - DIELECTRIC VOLTAGE WITHSTAND: 500V AC FOR ONE MINUTE
 - INSULATION RESISTANCE: 100MΩ·MIN. MEASURED BY 500 VDC
 - MECHANICAL CHARACTERISTICS:
 - INSERTED FORCE : 3.5 KG MAX.
 - WITHDRAWAL FORCE : 0.3~4.0 KG
 - LIFE TEST: 5,000 CYCLES MIN.
 - PACKING: TAPE & REEL
 - TO CONFORM TO THE "SE-01-001" & "ROHS DIRECTIVE"
 - GREEN PRODUCT IDENTIFICATION MARK IN JACK: G.P. PASS
 - GREEN PRODUCT IDENTIFICATION LABEL IN PACKING: G.P. PASS
 - FOR LEAD-FREE PROCESS.

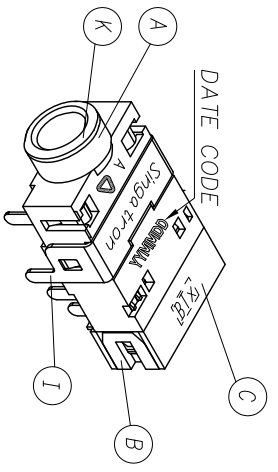

REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
E	ECN NO.1070223		BERYL	2007.7.31
F	ECN NO.1070173		LIAO	2007.09.05
G	ECN NO.S11113		SEAN	2011.12.08

K	METAL	1	BRASS	NICKEL PLATING
J	IC DRIVE	1	EPOXY	TIN PLATING (Lead-Free)
I	SHIELDING	1	COPPER ALLOY 0.5T	N/A
H	EARTH SPRING-A	1	PHOSPHOR BRONZE 0.25T	GOLD FLASH
G	EARTH SPRING-B	1	PHOSPHOR BRONZE 0.20T	GOLD FLASH
F	EARTH TERMINAL	1	PHOSPHOR BRONZE 0.20T	GOLD FLASH
E	TIP SPRING	1	PHOSPHOR BRONZE 0.25T	GOLD FLASH
D	RING SPRING	1	PHOSPHOR BRONZE 0.25T	GOLD FLASH
C	CASE	1	HIGH TEMP THERMOPLASTIC UL 94V-0	BLACK COLOR
B	COVER	1	HIGH TEMP THERMOPLASTIC UL 94V-0	BLACK COLOR
A	BODY	1	HIGH TEMP THERMOPLASTIC UL 94V-0	BLACK COLOR
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X : ±0.5	X : ±2°
X.X : ±0.3	X.X : ±1°
X.XX : ±0.2	

TITLE: Ø3.5 PHONE JACK (WITH IC)
 PART NO. 2SI-A373-703
 SCALE: 4/1 UNIT: mm
 SHEET: 1 OF 1 REV: G

Singaton Enterprise Co., Ltd.
 信音企業股份有限公司

CUSTOMER COPY