

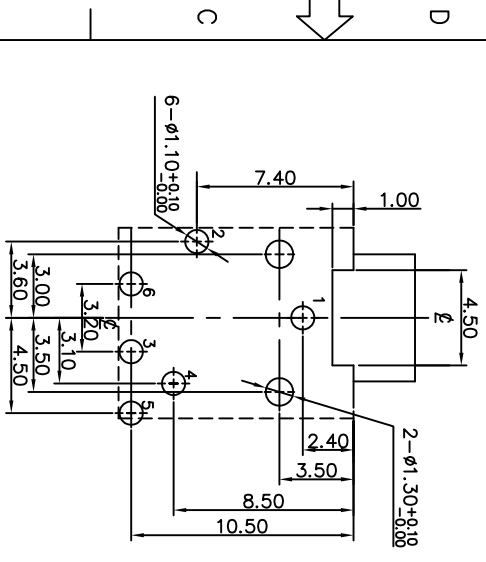
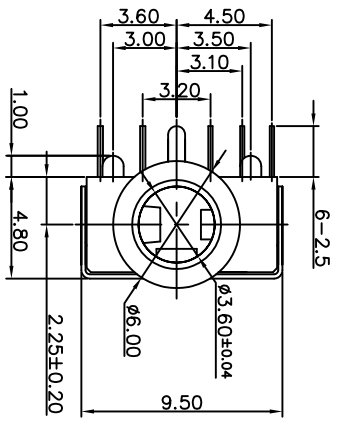
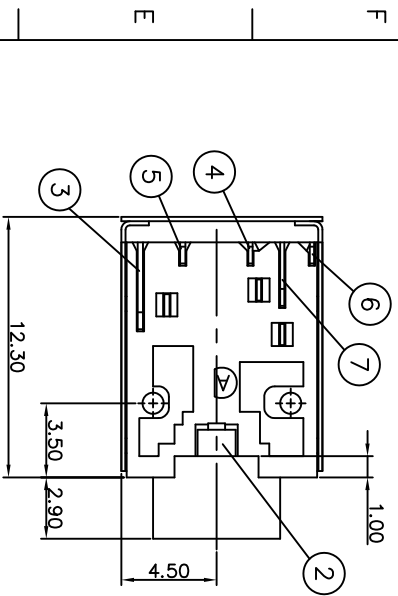


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.T100325-3A	Sanning	2010.05.13

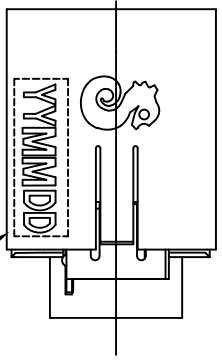

RECOMMENDED P.C.B. LAYOUT
TOP VIEW(TOL.±0.05)



DATE CODE.
DD: DAY
MM: MONTH
YY: YEAR

- SPECIFICATIONS:**
- INSULATION RESISTANCE BETWEEN ANY ADJACENT OPEN CIRCUIT TERMINAL SHELL NOT BE LESS THAN 100MΩ MEASURED BY 500 VDC MEGGER.
 - CONTACT RESISTANCE: 30mΩ MAX.
 - INSULATION VOLTAGE WITHSTAND:
500V AC FOR ONE MINUTE.
 - UNLESS OTHERWISE SPECIFIED. TEST IS TO BE MADE AT 5-35°C IN TEMPERATURE AND 45-85% IN HUMIDITY. BUT,IF ANY VAGUE DATA IS OCCURED ON TEST RESULT, ANOTHER TEST SHALL BE MADE AT 20°C±2°C IN TEMP., 60-70% IN HUMIDITY.
 - LIFE TEST: 5,000 CYCLES MIN. (NON-LOAD)
 - INSERTION FORCE: 0.4 - 3Kg.
 - WITHDRAWAL FORCE: 0.3 - 2Kg.
 - AFTER LIFE TEST, CONTACT RESISTANCE: 50mΩ MAX.
 - AFTER HUMIDITY TEST, INSULATION RESISTANCE: 50MΩ MIN.
 - MARKING: MARK "S" ON TOP OF CONNECTOR.
 - PACKAGING: TAPE & REEL.
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - GREEN PRODUCT IDENTIFICATION MARK ON JACK:
 - GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **G.P. PASS**
 - FOR LEAD-FREE PROCESS.

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
8	SHIELDING	1	PHOSPHOR BRONZE 0.2t	NICKEL PLATING
7	TRANSFER TERMINAL	1	PHOSPHOR BRONZE 0.2t	SILVER PLATING
6	BREAK TERMINAL	1	PHOSPHOR BRONZE 0.2t	SILVER PLATING
5	SHUNT TERMINAL-A	1	BRASS 0.25t	SILVER PLATING
4	RING SPRING	1	PHOSPHOR BRONZE 0.2t	SILVER PLATING
3	TIP SPRING	1	PHOSPHOR BRONZE 0.25t	SILVER PLATING
2	EARTH	1	COPPER ALLOY 0.3t	SILVER PLATING
1	BODY	1	HIGH TEMP.THERMOPLASTIC UL 94V-0	BLACK COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES	Singatron Enterprise Co., Ltd. 信晉企業股份有限公司		
DECIMALS:	ANGLES:	TITLE	3.5ø PHONE JACK
X : ±0.5	X : ±2°	DWN	Sanning 2010.05.13
X.X : ±0.3	X.X : ±1'	CHKD	Boye 2010.05.18
X.XX : ±0.2		APVD	Wu 2010.05.19
PART NO. 2SJ-C351-021 SCALE: 4:1 UNIT: MM SIZE: A3 SHEET: 1 OF 1 REV: A CUSTOMER COPY			