
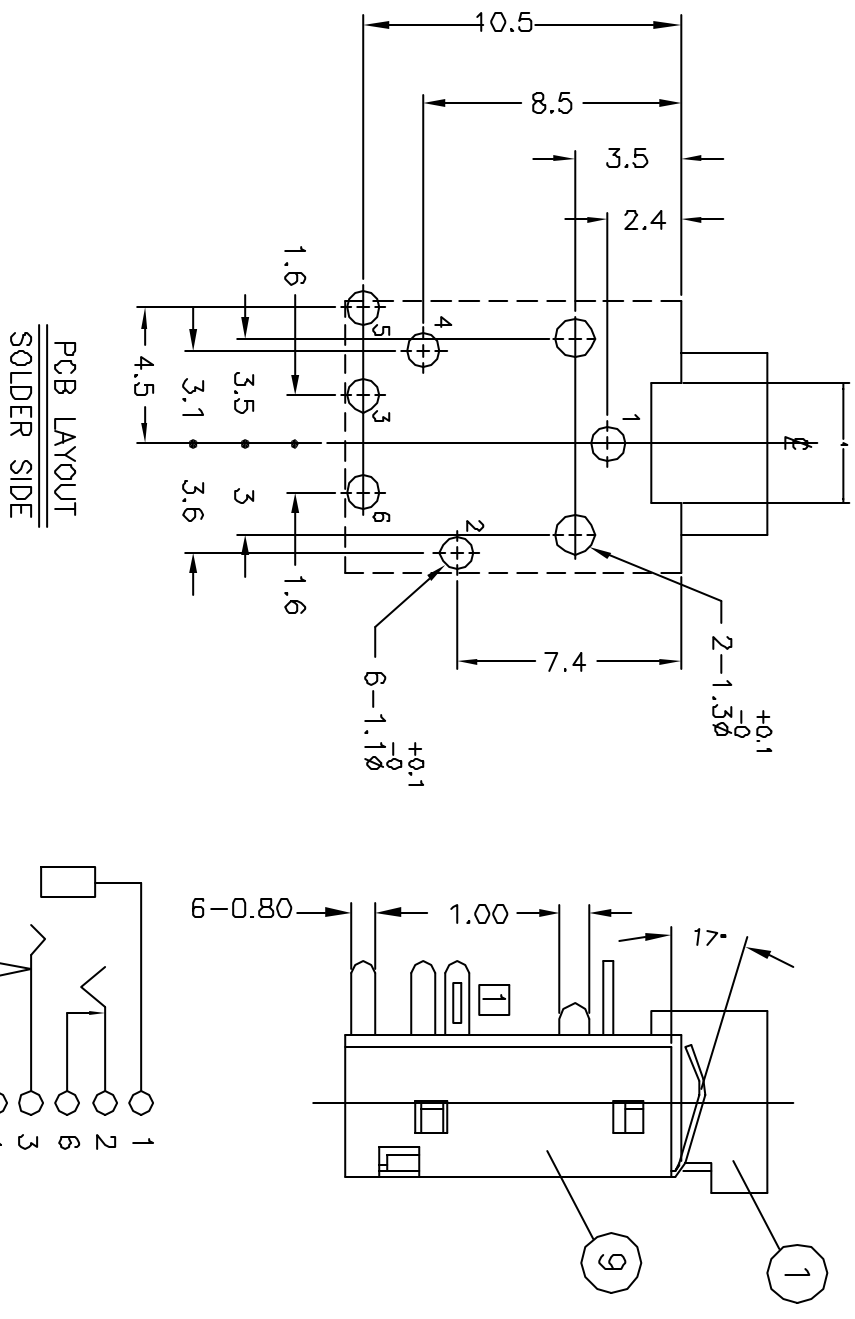


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
B	增加鐵刷長度 1	EVEN	11/7-'02
C	縮短鐵刷長度 2	BERYL	11/25-'02

- SPECIFICATIONS:
- INSULATION RESISTANCE BETWEEN ANY ADJACENT OPEN CIRCUIT TERMINAL SHELL NOT BE LESS THAN 100MΩ MEASURED BY 500 VDC MEGGER.
 - CONTACT RESISTANCE: 30mΩ MAX.
 - INSULATION VOLTAGE WITHSTAND: 500V AC FOR ONE MINUTE.
 - UNLESS OTHERWISE SPECIFIED, TEST IS TO BE MADE AT 5-35°C IN TEMPERATURE AND 45-85% IN HUMIDITY. BUT, IF ANY VAGUE DATA IS OCCURRED ON TEST RESULT, ANOTHER TEST SHALL BE MADE AT 20°C±2°C IN TEMP., 60-70% IN HUMIDITY.
 - LIFE TEST: 5,000 CYCLES MIN. (NON-LOAD)
 - INSERTION FORCE: 0.4 - 3kg.
 - WITHDRAWAL FORCE: 0.3 - 2kg.
 - AFTER LIFE TEST, CONTACT RESISTANCE: 50mΩ MAX.
 - AFTER HUMIDITY TEST, INSULATION RESISTANCE: 50MΩ MIN.
 - UNLESS OTHERWISE SPECIFIED TOLERANCE: ±0.2
 - MARKING: MARK "9" ON TOP OF CONNECTOR.

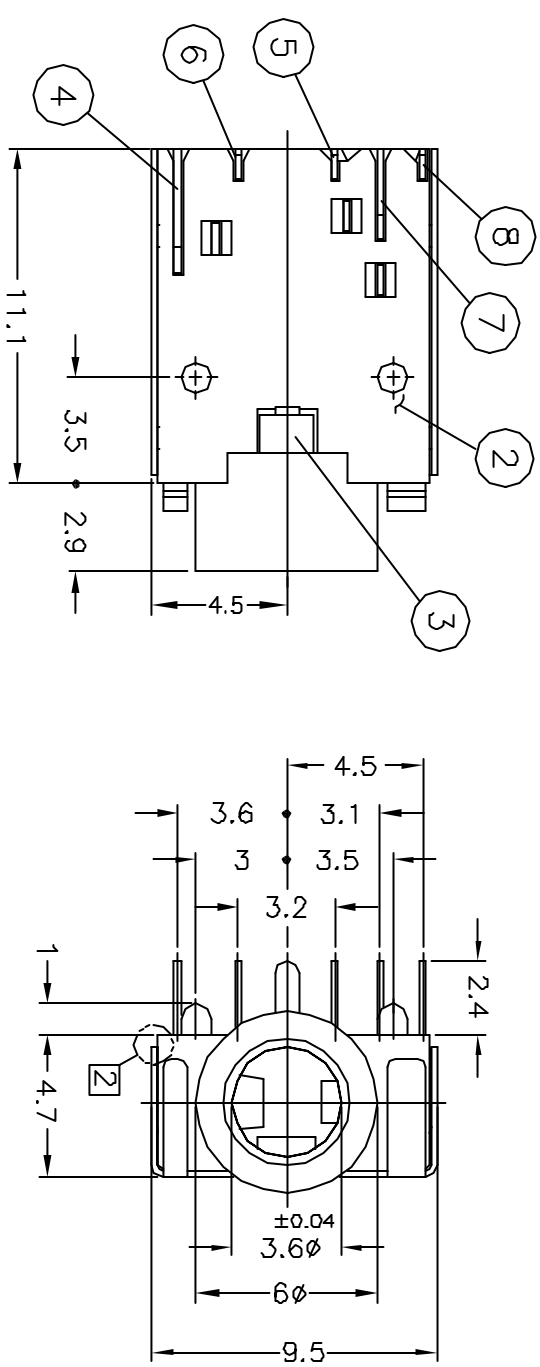

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
1	BODY	1	PBT UL 94V-0	PINK COLOR (PANTONE NO. 701c)
2	SEPARATOR	1	HIGH TEMP.THERMOPLASTIC UL 94V-0	BLACK COLOR
3	EARTH	1	COPPER ALLOY 0.3t	SILVER PLATING
4	TIP SPRING	1	PHOSPHOR BRONZE 0.25t	SILVER PLATING
5	RING SPRING	1	PHOSPHOR BRONZE 0.2t	SILVER PLATING
6	SHUNT TERMINAL-A	1	BRASS 0.25t	SILVER PLATING
7	BREAK TERMINAL	1	BRASS 0.2t	SILVER PLATING
8	TRANSFER TERMINAL	1	PHOSPHOR BRONZE 0.2t	SILVER PLATING
9	SHIELDING	1	PHOSPHOR BRONZE 0.2t	NICKEL PLATING

DECIMALS:	ANGLES:	TITLE
X : ±0.3	X : ±2°	3.5Ø PHONE JACK
X.X : ±0.2	X.X : ±1°	
X.XX : ±0.1		

UNLESS OTHERWISE SPECIFIED TOLERANCES	REV.:
APVD	11/27-'02
SHUN	11/27-'02
SIZE:	A3
SHEET:	1 OF 1
REV.:	C

Singatron Enterprise Co., Ltd.
信音企業股份有限公司

PART NO. 2SJ-S820-017

Form: 1