

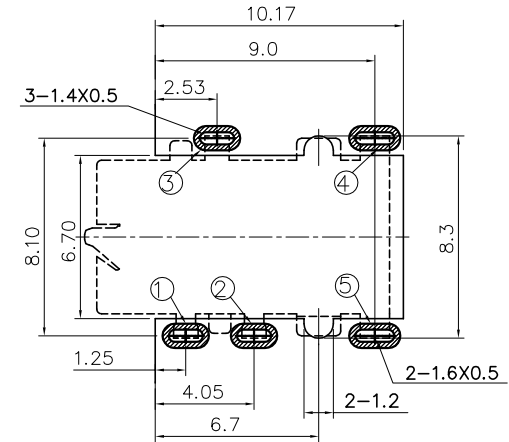


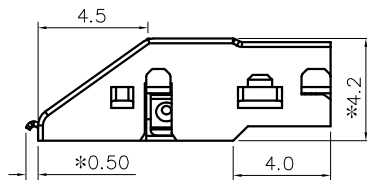
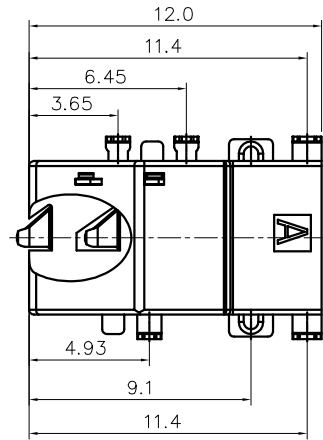




: INDICATES THE KEY DIMENSIONS [“”為重點尺寸]

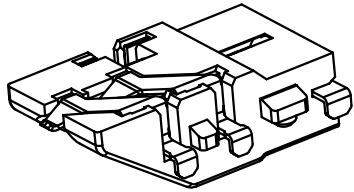

Recommend of PC Board Holes
Tolerance : ±0.05(Printed-Top view)

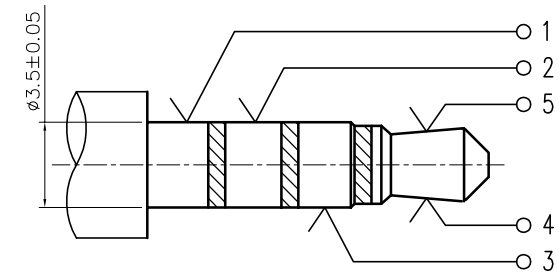

ø3.5-(4)MATEING PLUG-REF

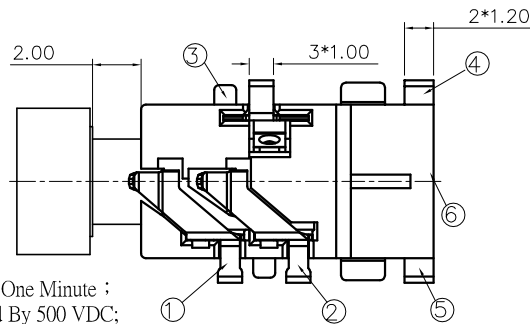

Notes:

- Electrical Characteristics:
 - 1-1. Rating : DC 30V 0.5 A ;
 - 1-2. Contact Resistance: 50mΩ Max.(Initial), 100mΩ Max.(Final) After test: ≤50mΩ ;
 - 1-3. Dielectric Withstanding Voltage: 500V AC for One Minute ;
 - 1-4. Insulation Resistance: 100MΩ Min. Measured By 500 VDC;
- Mechanical Characteristics:
 - 2-1. Plug Insertion Force 0.3~3.0Kgf (initial), 0.3~3.0Kgf (Final) life test;
 - 2-2. Plug Extraction Force: 0.3~3.0Kgf (initial), 0.3~3.0Kgf (Final) life test;
- Durability Test: 5,000 Cycles min;
- Operating temperature:-25°C ~ +70°C;
- Soldering Heat Resistance Reflow Soldering 260°C;
- Plug Interface Dimensions Conform To EIAJ RC-5325A Spec;
- Packaging:Tape Reel;

LEADFREE

6	HOUSING	1	HIGH TEMP.THERMOPLASTIC	BLACK
5	TERMINAL 5#	1	COPPER ALLOY	MB: Ni Gold Flash
4	TERMINAL 4#	1	COPPER ALLOY	MB: Ni Gold Flash
3	TERMINAL 3#	1	COPPER ALLOY	MB: Ni Gold Flash
2	TERMINAL 2#	1	COPPER ALLOY	MB: Ni Gold Flash
1	TERMINAL 1#	1	COPPER ALLOY	MB: Ni Gold Flash
LTR	PART NAME	QTY	MATERIAL	REMARK

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差		Singatron Enterprise Co., Ltd.			
		TITLE MINIATURE JACK			
X.X ±0.30	X.X' ±3°	DWN	H.RP	PART NO. 2SJ-W035-147JS	
X.XX ±0.20	X.XX' ±1°	CHKD	2014.07.21	SCALE 1:1	UNIT: mm
X.XXX ±0.15		APVD	GAOWEI	SIZE: A3	SHEET:1 OF 1 REV: A
CUSTOMER COPY					