
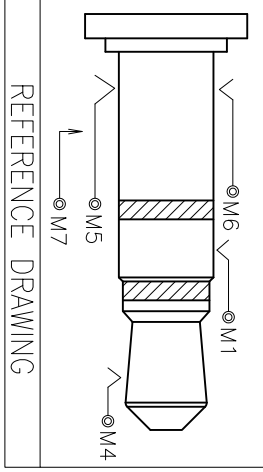
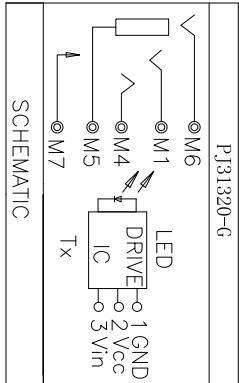
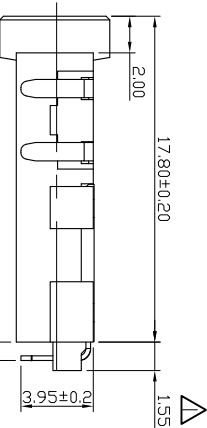

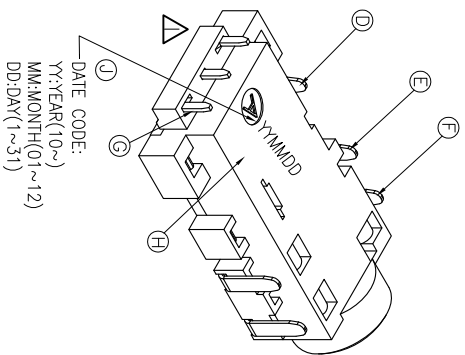




| REV. | ECN NO OR DESCRIPTION | REVISED | DATE |
|------|-----------------------|---------|------------|
| H | ECN NO. L120101 | IV-C | 2012.09.27 |
| I | ECN NO. L120180 | IV-C | 2012.12.25 |
| J | ECN NO. L130159 | IV-C | 2014.01.10 |

SPECIFICATIONS:

- OTHER GENERAL SPEC. TO REFER "2SJ1555 SERIES SPEC".
- TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING.
- FOR REFLOW SOLDERING LEAD-FREE PROCESS.
- PACKAGE : SEE "2SJ1555 SERIES" PACKAGE.

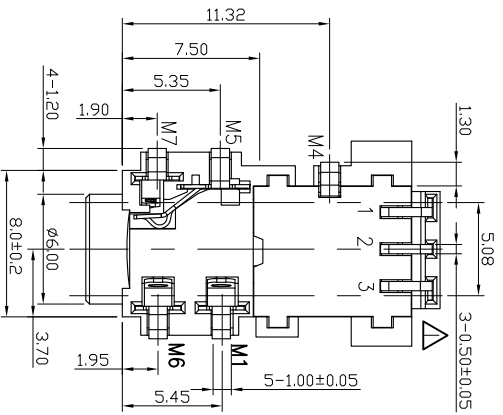

REFERENCE DRAWING

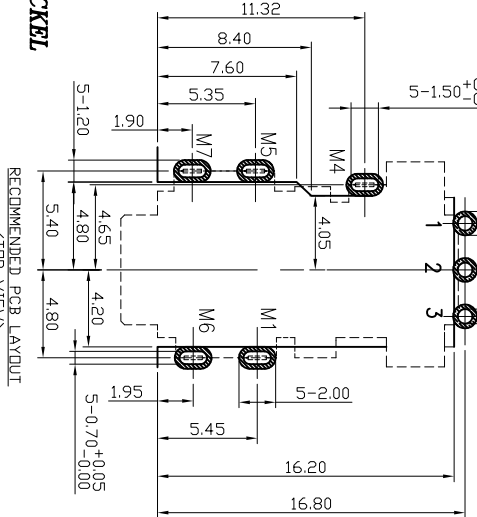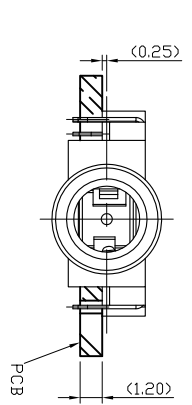

RECOMMENDED PCB LAYOUT
TOP VIEW

NOTE : TOLERANCE FOR PCB LAYOUT IS ± 0.05
RECOMMEND PCB THICKNESS 1.2mm

PART NO.
2SJ1555-000111

- PACKAGE
- 1: TAPE & REEL
- HOUSING COLOR
- 1: BLACK
- CONTACT PLATING
- 1: GOLD FLASH PLATING OVER NICKEL
- SCHEMATIC
- 0: TRANSMITTER(TX)

| J | INK | 1 | POLYIMIDE | BLACK COLOR |
|----|----------------|-----|---------------|-----------------|
| I | MYLAR | 1 | SUS 301 | |
| H | M4A CONTACT | 1 | LED | |
| G | DRIVE IC (TX) | 1 | BRONZE C5210 | GOLD FLASH |
| F | P CONTACT | 1 | C17200 | GOLD FLASH |
| E | GND CONTACT | 1 | BRONZE C5210 | GOLD FLASH |
| D | T CONTACT | 2 | BRONZE C5210 | GOLD FLASH |
| C | R/D(A) CONTACT | 1 | PA10T UL94-V0 | BLACK COLOR |
| B | COVER | 1 | PA10T UL94-V0 | BLACK COLOR |
| A | HOUSING | 1 | MATERIAL | PLATING & COLOR |
| NO | DESCRIPTION | QTY | | |

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X : ±0.5 X : ±2°

X.X : ±0.3 X.X : ±1°

X.XX : ±0.2 X.XX : ±1°

Singatron Enterprise Co., Ltd.
信亨企業股份有限公司

TITLE: Ø3.5mm EARPHONE JACK PLASTIC BUSHING

DWN: IN-C-2012.01.10 PART NO. 2SJ1555-000111

CHKD: SCALE: N/A UNIT: mm

APVD: SHEET: 1 OF 1 REV: J

CUSTOMER COPY