
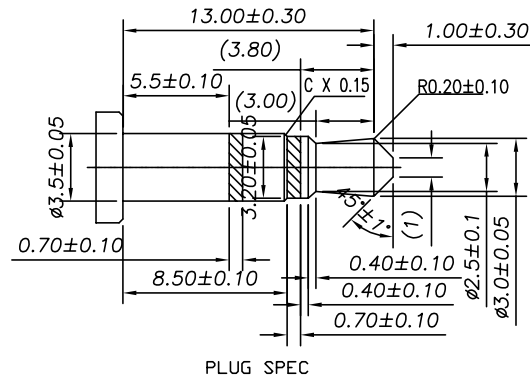


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR RELEASE	Even	2018.02.21

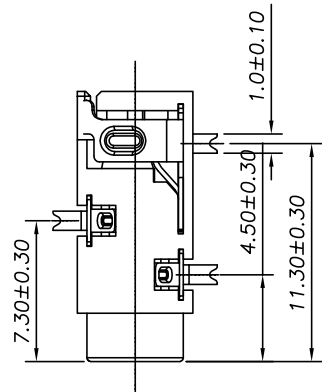

SPECIFICATION:

1. ELECTRICAL CHARACTERISTICS:

- 1-1. CONTACT RESISTANCE: 30mΩ MAX.(INITIAL)
- 1-2. INSULATION RESISTANCE: 100MΩ MIN. @ 500V DC.
- 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.

2. MECHANICAL CHARACTERISTICS:

- 2-1. INSERTION FORCE: 0.3~3.0Kgf.
- 2-2. WITHDRAWAL FORCE: 0.3~3Kgf.

3. LIFE TEST: 5,000 CYCLES.


4. TO CONFORM TO THE SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.

5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: G.P. PASS

6. PACKAGE: SEE "2SJ1660-000111H" PACKAGE.

7. FOR WAVE SOLDERING LEAD-FREE PROCESS.




8. OTHER GENERAL SPEC. TO REFER "2SJ1660-000111H SPEC"

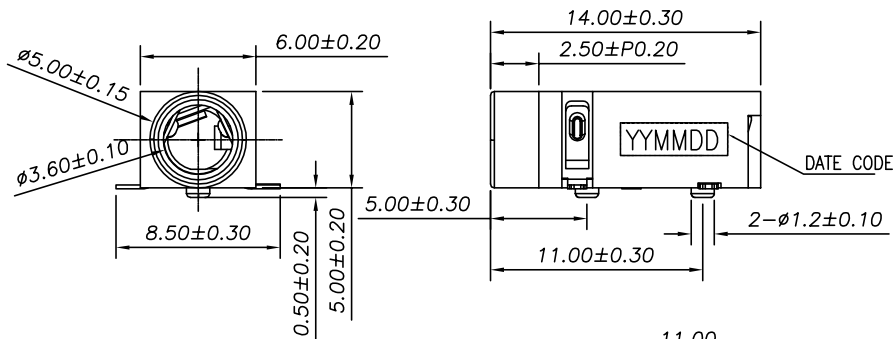

PART NO.
2SJ1660-000111H

CONTACT PLATING
1. Ag PLATING

SUFFIX: HALOGEN
PACKAGE
1: TAPE & REEL
HOUSING COLOR
1: BLACK

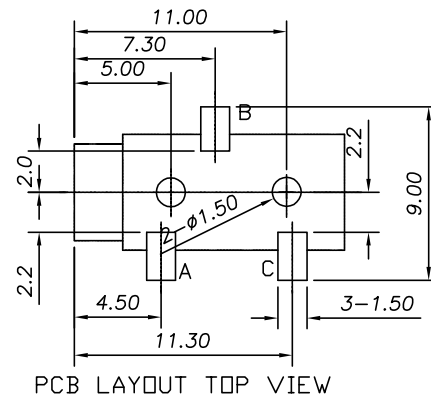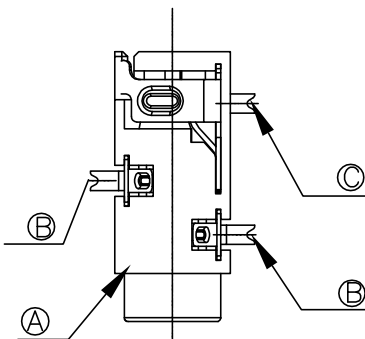

C	TERMINAL	1	C5191	Ni(50u*min) Ag(1u*min) PLATED
B	TERMINAL	2	C5191	Ni(50u*min) Ag(1u*min) PLATED
A	HOUSING	1	PA9T UL 94V-0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES		Singatron Enterprise Co., Ltd. 信音企業股份有限公司		
DECIMALS:	ANGLES:	TITLE PHONE JACK		
X :±0.5	X :±2°	DWN	EVEN 2018.02.21	PART NO. 2SJ1660-000111H
X.X :±0.3	X.X :±1°	CHKD	ANCELA2018.02.21	SCALE N/A UNIT: mm
X.XX :±0.2		APVD	ANCELA2018.02.21	SIZE: A3 SHEET:1 OF 1 REV: A

CUSTOMER COPY