

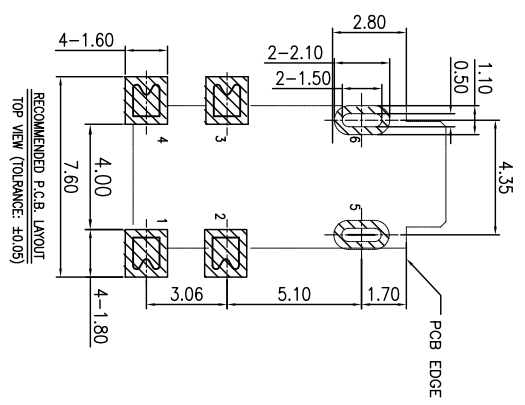
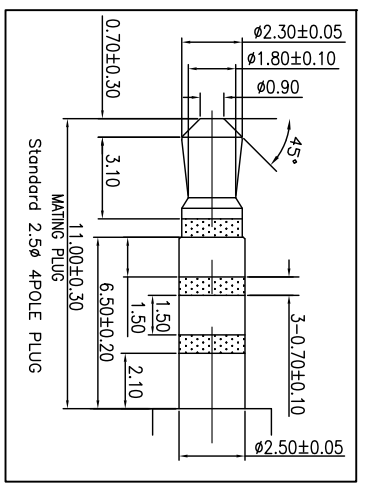




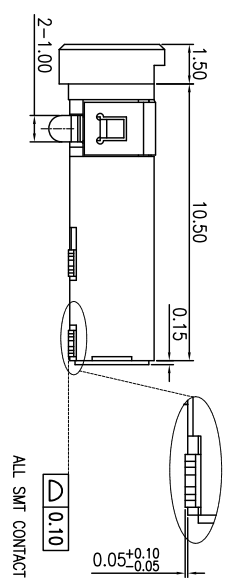


REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A		PRODUCT RELEASED	SIH	2008.07.22
B	ECN:C130041	MODIFY PLATING	ZJK	2013.06.14



- SPECIFICATIONS:**
- ELECTRICAL CHARACTERISTICS:**
    - 1-1. RATING: 36V 1A
    - 1-2. CONTACT RESISTANCE: 30mΩ MAX (INITIAL)
    - 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 250V AC FOR ONE MINUTE.
    - 1-4. INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500 VDC
  - MECHANICAL CHARACTERISTICS:**
    - 2-1. INSERTION FORCE : 0.3~3.0 KGF
    - 2-2. WITHDRAWAL FORCE : 0.3~3.0 KGF
  3. LIFE TEST: 6000 CYCLES .
  4. OTHER GENERAL SPEC. TO REFER "2SU2268 SERIES SPEC".
  5. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
  6. GREEN PRODUCT IDENTIFICATION MARK ON JACK:
  7. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **G.P. PASS**
  8. FOR REFLOW SOLDERING LEAD-FREE PROCESS.
  9. D/C DESCRIPTION



8	COVER	1	SUS 0.15t		
7	SHUNT-B	1	BRASS 0.2T	Au 5u" Min.	
6	SHUNT-A	1	BRASS 0.2T	Au 5u" Min.	
5	RING SPRING-B	1	COPPER ALLOY 0.2t	Au 5u" Min.	
4	RING SPRING-A	1	COPPER ALLOY 0.2t	Au 5u" Min.	
3	TIP SPRING	1	COPPER ALLOY 0.2t	Au 5u" Min.	
2	EARTH SPRING	1	COPPER ALLOY 0.2t	Au 5u" Min.	
1	BODY	1	HIGH TEMP. THERMOPLASTIC	BLACK COLOR	
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR	

UNLESS OTHERWISE SPECIFIED TOLERANCES

Singaton Enterprise Co., Ltd.  
信音企業股份有限公司

DECIMALS:	ANGLES:	TITLE
X : ±0.5	X : ±2°	2.50 PHONE JACK
X.X : ±0.3	X.X : ±1'	
X.XX : ±0.2		

DWN	2xk 13/6/21	PART NO.2S12268-102111	
CHKD	2x2 13/6/21	SCALE 5:1	UNIT: mm
APVD	ltdo 13/6/21	SIZE: A3	SHEET: 1 OF 1

REV: B

CUSTOMER COPY