REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCTS RELEASE	Kim	2010.07.05
B	ECN:C110387 Modify plating	LONGJIANG	2012.01.03

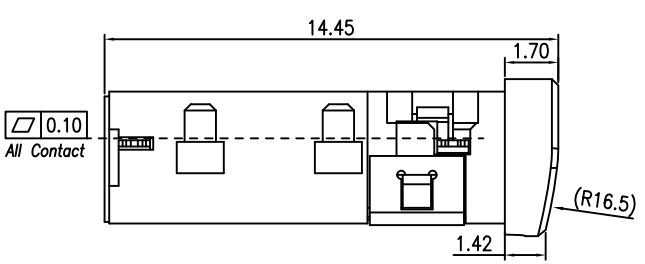

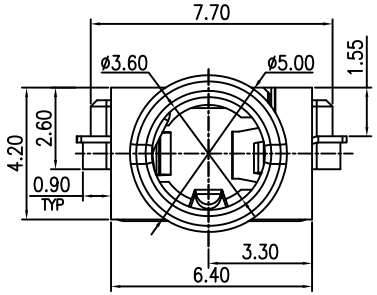





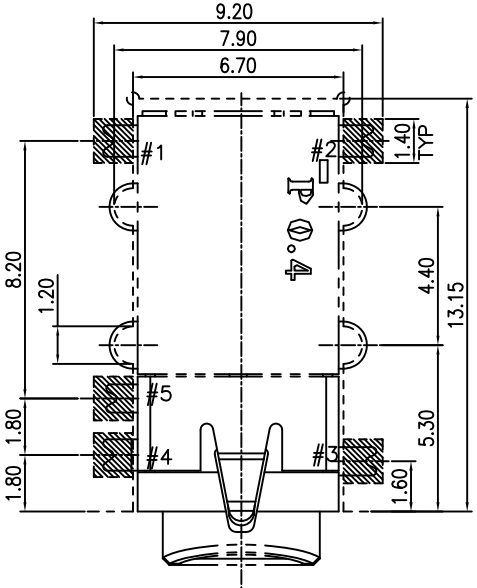

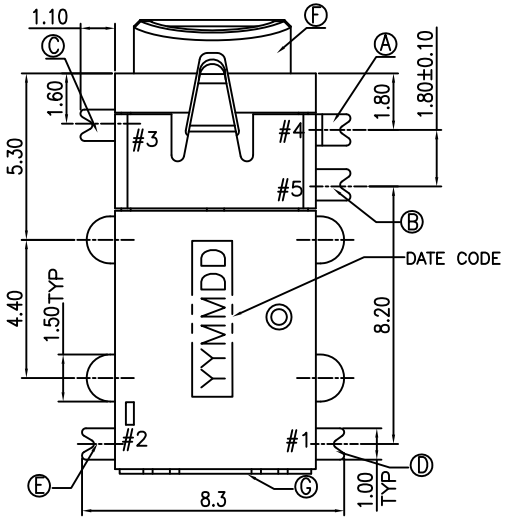

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:
   1-1.RATING: 12V AC, 1A DC.
   1-2.CONTACT RESISTANCE: 30mΩMAX(INITIAL).
2. MECHANICAL CHARACTERISTICS:
   2-1. INSERTION FORCE : 3.0KGF MAX
   2-2. WITHDRAWAL FORCE : 0.3KGF MIN
3. LIFE TEST: 10,000 CYCLES MIN.
4. PACKAGING: TAPE & REEL
5. TO CONFORM TO THE SINGATRON HSF SPECIFICATION.
6. HALOGEN FREE PRODUCT IDENTIFICATION MARK ON PRODUCT:
7. HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING:
8. FOR REFLOW SOLDERING LEAD-FREE PROCESS.
9. SOLDER HEAT RESISTANCE REFLOW SOLDERING 260°C 10SECS.
10. DATE CODE:YY MM DD
    - DD: Day
    - MM: Month
    - YY: Year

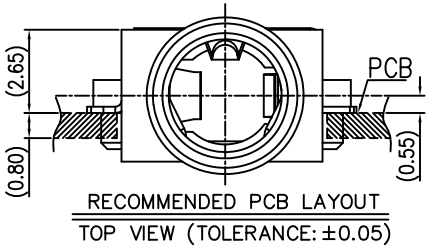

RECOMMENDED PCB LAYOUT
TOP VIEW (TOLERANCE: ±0.05)

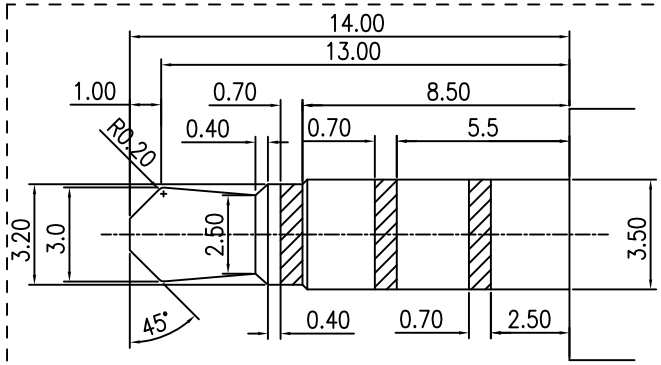

3.5ø 4POLE PLUG (TOLERANCE:±0.05)

G	COVER	1	SUS	
F	BODY	1	THERMOPLASTIC HIGH TEMP	BLACK COLOR
E	RING SPRING A	1	COPPER ALLOY 0.2t	GOLD FLASH
D	TIP SPRING	1	COPPER ALLOY 0.2t	Gold flash on contact area And solder tail,all over Nickel plated B
C	RING SPRING B	1	COPPER ALLOY 0.2t	GOLD FLASH
B	GROUND	1	COPPER ALLOY 0.2t	GOLD FLASH
A	EARTH	1	COPPER ALLOY 0.2t	GOLD FLASH
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFED TOLERANCES

DECIMALS: ANGLES:
X :±0.5 X :±2°
X.X :±0.3 X.X :±1°
X.XX :±0.2

Singatron Enterprise Co., Ltd.
信音企業股份有限公司

TITLE	3.5ø PHONE JACK		
DWN	LONGJIANG2012.1.9	PART NO. 2SJ2271-104111	
CHKD	ZJZ 2012.01.09	SCALE 6:1	UNIT: mm
APVD	LMO 2012.01.09	SIZE: A3	SHEET: 1OF1 REV: B

CUSTOMER COPY

文件編號 RD-06-043-A