



RECOMMENDED P.C.B. LAYOUT T=1.20
TOP VIEW (TOLERANCE: ±0.05)



- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
 - RATING: 36V, 1A.
 - CONTACT RESISTANCE: 50mΩ MAX.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE.
 - INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500 VDC.
 - MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE : 0.4~3.0 KGF
 - WITHDRAWAL FORCE : 0.3~2.0 KGF
 - LIFE TEST: 5,000 CYCLES MIN.
 - OTHER GENERAL SPEC. TO REFER "2SJ2285 SERIES SPEC".
 - TO CONFORM TO THE SINGAIRON HAZARDOUS SUBSTANCE FREE SPEC.
 - HALOGEN PRODUCT IDENTIFICATION MARK ON JACK: ○
 - HALOGEN PRODUCT IDENTIFICATION LABEL ON PACKAGING.
 - FOR REFLOW SOLDERING LEAD-FREE PROCESS.
 - PACKAGING: TAPE&REEL.

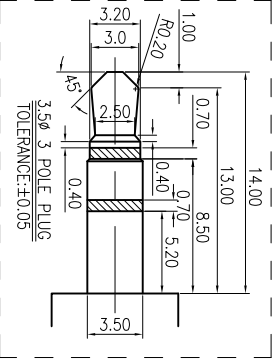

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
B	ECN NO:C110149-1 Modify Plating specification	BILLY	2011.06.23
C	ECN NO:C1202058 Modify Shell Shape	BILLY	2012.4.06
D	ECN NO:C140074 Modify Layout	ZLS	2014.7.28

K	MYLAR	1	T=0.075		
J	MYLAR	1	T=0.075		
I	SHIELD	1	COPPER ALLOY 0.20T		NI PLATING
H	TRANSFER TERMINAL	1	COPPER ALLOY 0.20T		Δ Gold Flash on contact area and Solder toll all over Nickel Plated
G	MAKE TERMINAL	1	COPPER ALLOY 0.20T		Δ Gold Flash on contact area and Solder toll all over Nickel Plated
F	RING	1	COPPER ALLOY 0.20T		GOLD FLASH
E	SHUNT	1	COPPER ALLOY 0.20T		Δ Gold Flash on contact area and Solder toll all over Nickel Plated
D	TIP	1	COPPER ALLOY 0.25T		GOLD FLASH
C	EARTH	1	COPPER ALLOY 0.20T		GOLD FLASH
B	METAL	1	COPPER ALLOY 0.20T		NI PLATING
A	BODY	1	HIGH TEMP.THERMO PLASTIC 94V-0		BLACK COLOR
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR	
UNLESS OTHERWISE SPECIFIED TOLERANCES					
Singairon Enterprise Co., Ltd. 信晉企業股份有限公司					
TITLE: 3.50 PHONE JACK					
DWN	ZLS	14/8/19	PART NO. 2SJ2285-000141		
CHKD	BILLY	14/8/19	SCALE 3:1	UNIT: mm	
APVD	ZLS	14/8/19	SIZE: A3	SHEET: 10F1	REV: D
CUSTOMER COPY					