



SCHEMATIC



RECOMMENDED P.C.B. LAYOUT T=1.20  
TOP VIEW (TOLERANCE: ±0.05)

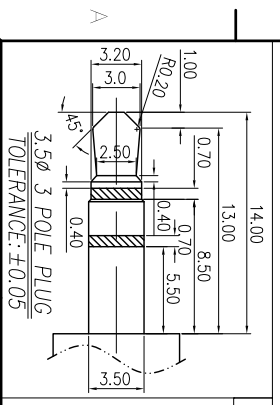

SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS:
  - RATING: 36V AC, 1A DC.
  - CONTACT RESISTANCE: 50mΩ MAX.
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE.
  - INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500 VDC.
- MECHANICAL CHARACTERISTICS:
  - INSERTION FORCE: 0.4~3.0 KGF
  - WITHDRAWAL FORCE: 0.3~2.0 KGF
- LIFE TEST: 5 000 CYCLES MIN.
- OTHER GENERAL SPEC. TO REFER "2S/J2265 SERIES SPEC".
- TO CONFORM TO THE SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- HALOGEN PRODUCT IDENTIFICATION MARK ON JACK: Ⓞ
- HALOGEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: Ⓞ
- FOR REFLOW SOLDERING LEAD-FREE PROCESS.
- PACKAGING: TAPE&REEL.



I	MYLAR	1	MYLAR 0.15T	
H	SHIELD	1	COPPER ALLOY 0.20T	NI PLATING
G	MAKE TERMINAL	1	COPPER ALLOY 0.20T	GOLD FLASH
F	TRANSFER TERMINAL	1	COPPER ALLOY 0.20T	
E	RING	1	COPPER ALLOY 0.20T	△ Gold Flash on contact area, and Solder tail all over Nickel Plating
D	TIP	1	COPPER ALLOY 0.25T	GOLD FLASH
C	SHUNT	1	COPPER ALLOY 0.20T	GOLD FLASH
B	EARTH	1	COPPER ALLOY 0.20T	GOLD FLASH
A	BODY	1	HIGH TEMP THERMOPLASTIC UL 94V-0	BLACK COLOR
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
信音企業股份有限公司				
DECIMALS:	ANGLES:	TITLE		
X : ±0.5	X : ±2°	3.50 PHONE JACK		
X.X : ±0.3	X.X : ±1°	DWN	PART NO. 2S/J2265-004151F	REV: A
X.XX : ±0.2		CHKD	SCALE 1:1	UNIT: mm
		APVD	DATE: 14.8/11	SHEET: 10F1
CUSTOMER COPY				

REV	ECN NO OR DESCRIPTION	REVISED	DATE
B	ECN:C100405 ADD TOLERANCE	BILLY	2010.10.11
C	ECN:C110149-8 Modify Plating Au Area.	BILLY	2010/05/23
D	ECN NO.:C140074 MODIFY LAYOUT	ZLS	2014.8.1