



SCHEMATIC

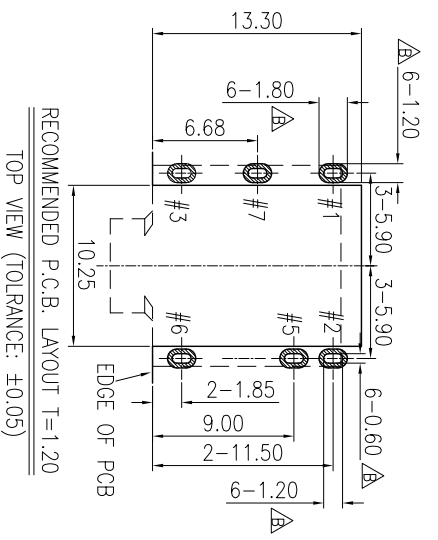

SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS:
 - RATING: 36V AC, 1A DC.
 - CONTACT RESISTANCE: 50mΩ MAX.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE.
 - INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500 VDC.
- MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE : 0.4~3.0 KGf
 - WITHDRAWAL FORCE : 0.3~2.0 KGf
- LIFE TEST: 5,000 CYCLES MIN.
- OTHER GENERAL SPEC. TO REFER "ZSJ2285 SERIES SPEC".
- TO CONFORM TO THE SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- HALOGEN FREE PRODUCT IDENTIFICATION MARK ON PRODUCT: ©
- HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING: ©
- FOR REFLOW SOLDERING LEAD-FREE PROCESS.
- PACKAGING:TAPE&REEL.



REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCED RELEASED	STEVEN	2010.2.9
B	ECN NO:C1101000 Modify PCB LAYOUT DIM	BILLY	2011.04.06
C	ECN:C110149-13 Modify Picting Au Area	BILLY	2010/05/30

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
H	SHIELD	1	MYLAR 0.075T	NI PLATING
G	TRANSFER TERMINAL	1	COPPER ALLOY 0.20T	△ Gold Flash on contact area and Solder tail all over Nickel Plating
F	MAKE TERMINAL	1	COPPER ALLOY 0.20T	GOLD FLASH
E	RING	1	COPPER ALLOY 0.20T	△ Gold Flash on contact area and Solder tail all over Nickel Plating
D	TIP	1	COPPER ALLOY 0.25T	GOLD FLASH
C	EARTH	1	COPPER ALLOY 0.20T	GOLD FLASH
B	MYLAR	1	COPPER ALLOY 0.20T	GOLD FLASH
A	BODY	1	HIGH TEMP-THERMOPLASTIC UL 94V-0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES:

DECIMALS: ANGLES:

X : ±0.5 X : ±2°
X.X : ±0.3 X.X : ±1'
X.XX : ±0.2

TITLE: 3.50 PHONE JACK

PART NO. ZSJ2285-012693

SCALE 3:1 UNIT: mm

SIZE: A SHEET: 10F1 REV: C

CUSTOMER COPY

信音企业股份有限公司
Singatron Enterprise Co., Ltd.