



RECOMMENDED P.C.B. LAYOUT T=1.20
TOP VIEW (TOLERANCE: ±0.05)

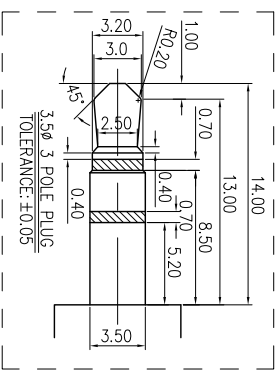

REV.	ECN NO.	OR DESCRIPTION	REVISION	DATE
A	PRODUCED	RELEASED	JUNHUA	2009.05.07
B	ECN NO: C101049-16	Modify Rating specification	LongJiang	2011.06.13
C	ECN NO: C140074	Modify LAYOUT	ZLS	2014.8.11

- DATE CODE
- YY MM DD
Year Month Day
10. DATE CODE: YY MM DD
Year Month Day
1. ELECTRICAL CHARACTERISTICS:
 1-1. RATING: 36V AC, 1A DC.
 1-2. CONTACT RESISTANCE: 50mΩ MAX.
 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE.
 1-4. INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500 VDC
 2. MECHANICAL CHARACTERISTICS:
 2-1. INSERTION FORCE : 0.4~3.0 KGf
 2-2. WITHDRAWAL FORCE : 0.3~2.0 KGf
 3. LIFE TEST: 5,000 CYCLES MIN.
 4. OTHER GENERAL SPEC. TO REFER "2SJ2285 SERIES SPEC".
 5. TO CONFORM TO THE SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 6. HALOGEN FREE PRODUCT IDENTIFICATION MARK ON JACK
 7. HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING:
 8. FOR HAND SOLDERING LEAD-FREE PROCESS.
 9. PACKAGING: TAP&REEL
 10. DATE CODE: YY MM DD
 Year Month Day

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
H	NYLAR	1	NYLAR 0.0751	
G	SHIELD	1	COPPER ALLOY 0.20T	Nickel Plated
F	TRANSFER TERMINAL	1	COPPER ALLOY 0.20T	Δ Gold Flash on contact area and Solder Fall, all over Nickel Plated
E	MAKE TERMINAL	1	COPPER ALLOY 0.20T	GOLD FLASH
D	RING	1	COPPER ALLOY 0.20T	Δ Gold Flash on contact area and Solder Fall, all over Nickel Plated
C	HP	1	COPPER ALLOY 0.25T	Δ Gold Flash on contact area and Solder Fall, all over Nickel Plated
B	EARTH	1	COPPER ALLOY 0.20T	GOLD FLASH
A	BODY	1	HIGH TEMP THERMOPLASTIC UL 94V-0	BLACK COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X : ±0.5 X : ±2°
 X.X : ±0.3 X.X : ±1°
 X.XX : ±0.2

Singatron Enterprise Co., Ltd.
 信亨企業股份有限公司

TITLE: 3.50 PHONE JACK
 PART NO. 2SJ2285-112252
 SCALE 3:1 UNIT: mm
 SIZE: A3 SHEET: 10F1 REV: C

CUSTOMER COPY