



RECOMMENDED P.C.B. LAYOUT
TOP VIEW (TOLERANCE: ±0.05)

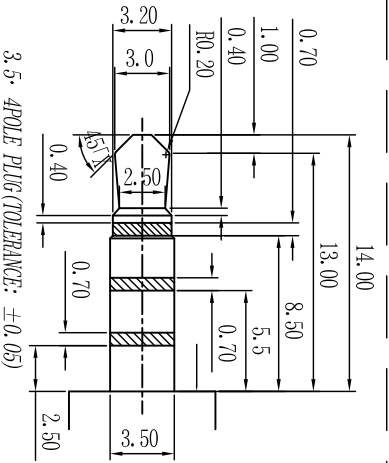

- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
 - RATING: 12V 1A
 - CONTACT RESISTANCE: 30m MAX(BEFORE) Ω
 - DIELECTRIC VOLTAGE WITHSTAND: 500V AC FOR ONE MINUTE
 - INSULATION RESISTANCE: 100M MIN. MEASURED BY 500 VDC
 - MECHANICAL CHARACTERISTICS:
 - INSERTED FORCE : 3.0 KGF MAX.
 - WITHDRAWAL FORCE : 0.3-3.0 KGF
 - LIFE TEST: 5,000 CYCLES MIN.
 - TO CONFORM TO THE SINGATON HSP SPECIFICATION.
 - HALOGEN FREE PRODUCT IDENTIFICATION MARK:
 - HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING:
 - FOR REFLOW SOLDERING LEAD-FREE PROCESS.
 - PACKAGING IN TAPE & REEL.

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
F	RING-B	1	COPPER ALLOY 0.2t	GOLD FLASH
E	EARTH	1	COPPER ALLOY 0.2t	GOLD FLASH
D	RING-A	1	COPPER ALLOY 0.2t	GOLD FLASH
C	TIP	1	COPPER ALLOY 0.2t	GOLD FLASH
B	SHUNT	1	COPPER ALLOY 0.2t	GOLD FLASH
A	BODY	1	HI-TEMP THERMOPLASTIC	BLACK
	UNLESS OTHERWISE SPECIFIED TOLERANCES			

Singaton Enterprise Co., Ltd.
信音企業股份有限公司

DECIMALS:	ANGLES:	TITLE
X : ±0.5	X : ±2°	3.5 PHONE JACK
X.X : ±0.3	X.X : ±1°	PART NO. 2SJ2321-002111F
X.XX : ±0.2		SCALE 3:1 (UNIT: mm)
		SIZE: A3 SHEET: 10P1
		REV: A
		CUSTOMER COPY

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCE RELEASE	JIANGLI	2010.12.08