

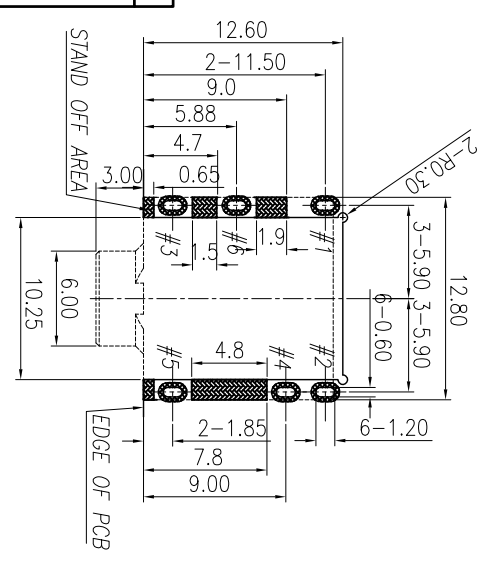


SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:
 - 1-1. RATING: 12V AC, 1A DC.
 - 1-2. CONTACT RESISTANCE: 50m Ω MAX.
 - 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE.
 - 1-4. INSULATION RESISTANCE: 100M Ω MIN. MEASURED BY 500 VDC.
2. MECHANICAL CHARACTERISTICS:
 - 2-1. INSERTION FORCE : 0.4~3.0 KGf
 - 2-2. WITHDRAWAL FORCE : 0.3~2.0 KGf
3. LIFE TEST: 5,000 CYCLES MIN.
4. OTHER GENERAL SPEC. TO REFER "2SU2285 SERIES SPEC".
5. TO CONFORM TO THE SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
6. HALOGEN FREE PRODUCT IDENTIFICATION MARK ON JACK: Ⓢ
7. HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING: Ⓢ
8. FOR REFLOW SOLDERING LEAD-FREE PROCESS.
9. PACKAGING: TAP&REEL
12. DATE CODE: YYMMDD

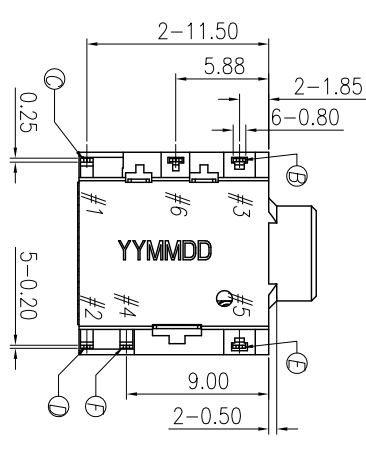

RECOMMENDED P.C.B. LAYOUT T=1.20
TOP VIEW (TOLERANCE: ±0.05)

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCE REAL-EASE	JIANGUO	2010.11.18
B	ECN:C100616 Design Change	BILLY	2011.01.06
C	ECN MDC11049-16 Modify Plating specification	LongJiong	2011.06.13

I	MYLAR	1	3M 467	0.075T	TRANSPARENT
H	MYLAR	1	3M 467	0.075T	TRANSPARENT
G	SHIELD	1	COPPER ALLOY	0.20T	Gold Flash on contact area all over nickel plated
F	TRANSFER TERMINAL	1	COPPER ALLOY	0.20T	Gold Flash on contact area and Solder tail, all over Nickel Plated
E	MAKE TERMINAL	1	COPPER ALLOY	0.20T	Gold Flash
D	RING	1	COPPER ALLOY	0.20T	Gold Flash on contact area and Solder tail, all over Nickel Plated
C	TIP	1	COPPER ALLOY	0.25T	Gold Flash on contact area and Solder tail, all over Nickel Plated
B	EARTH	1	COPPER ALLOY	0.20T	Gold Flash
A	BODY	1	HIGH TEMP THERMOPLASTIC UL 94V-0		BLACK
NO	DESCRIPTION	QTY	MATERIAL		PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES					
Singatron Enterprise Co., Ltd. 信音企業股份有限公司					
TITLE: 3.50 PHONE JACK					
DWN	LONGNAME	2011.6.24	PART NO.	2SU2326-001111	
CHKD	DATE	2011.6.24	SCALE	3:1	UNIT: mm
APVD	DATE	2011.6.24	SIZE:	A3	SHEET: 10F1
REV: C					
CUSTOMER COPY					