
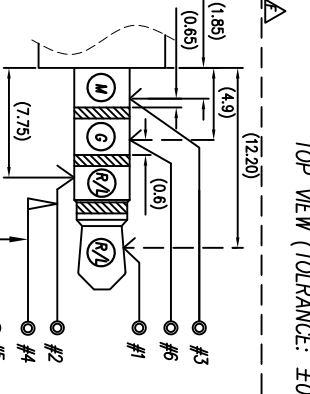


RECOMMENDED P.C.B. LAYOUT T=1.20
TOP VIEW (TOLERANCE: ±0.05)

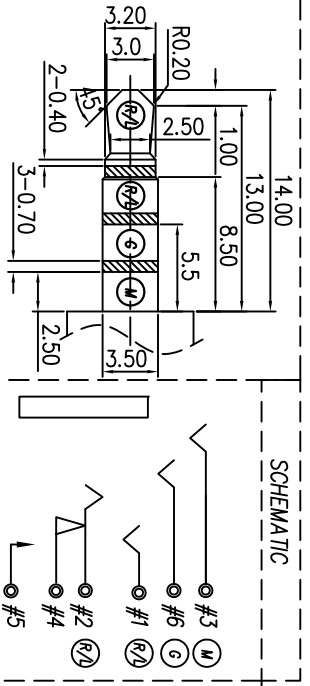

SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS:
 - RATING: 12V, 1A.
 - CONTACT RESISTANCE: 50mΩ MAX.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE.
 - INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500 VDC.
- MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE : 0.4~3.0 KGf
 - WITHDRAWAL FORCE : 0.3~2.0 KGf
 - LIFE TEST: 5,000 CYCLES MIN.
 - OTHER GENERAL SPEC. TO REFER "2SJD285 SERIES SPEC."
 - TO CONFORM TO THE SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - HALOGEN FREE PRODUCT IDENTIFICATION MARK ON JACK:
 - HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING:
 - FOR REFLOW SOLDERING LEAD-FREE PROCESS.
 - PACKAGING: TAPE&REEL.

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
F	EN NO.020011 ADD DIM TOLERANCE AND MATING DRAWING	ZLS	2012.4.18
G	EN NO.0200205 Muddy Pading List	ZLS	2012.10.15
H	EN NO.0200274 Muddy Input	ZLS	2014.7.26

H	MYLAR	1	MYLAR 0.075T	
G	SHIELD	1	COPPER ALLOY 0.20T	All 1~3/4" on contact area all over N1 400 min Pading
F	TRANSFER TERMINAL	1	COPPER ALLOY 0.20T	
E	MAKE TERMINAL	1	COPPER ALLOY 0.20T	All 1~3/4" on contact area and Solder call all over N1 400 min Paded
D	RING	1	COPPER ALLOY 0.20T	
C	TIP	1	COPPER ALLOY 0.25T	
B	EARTH	1	COPPER ALLOY 0.20T	All 1~3/4" on all area all over N1 400 min Pading
A	BODY	1	HIGH TEMP THERMOPLASTIC UL 94V-0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singatron Enterprise Co., Ltd. 信晉企業股份有限公司				
DECIMALS:	ANGLES:	TITLE		
X : ±0.5	X : ±2°	3.5Ø PHONE JACK		
X.X : ±0.3	X.X : ±1°	DWN	ZLS 14/8/19	PART NO. 2SJD326-002111
X.XX : ±0.2		CHKD	BILLY 14/8/19	SCALE 3:1
		APVD	ZLS 14/8/19	SIZE: A3
				SHEET: 10F1
				REV. H
				CUSTOMER COPY