
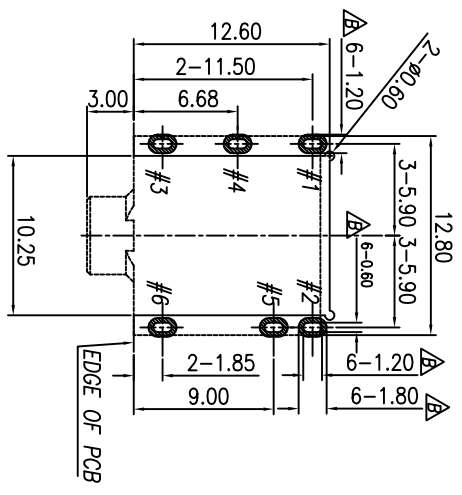

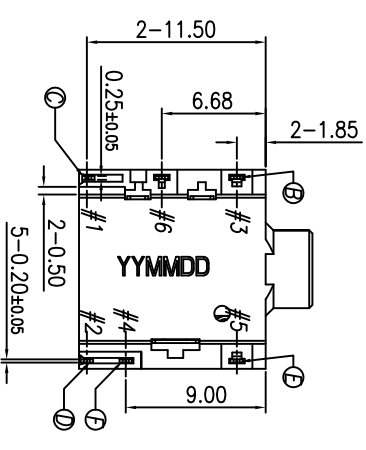
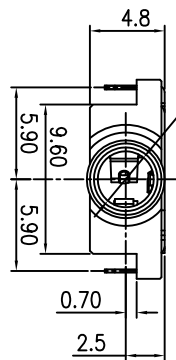
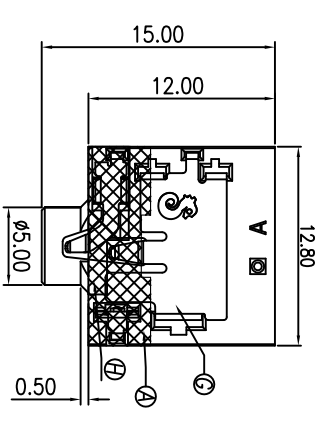


REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	ZLS	2012.07.31	
B	ECN NO.:G140074	MODIFY LAYOUT	ZLS	2014.7.22



RECOMMENDED P.C.B. LAYOUT T=1.20
TOP VIEW (TOLERANCE: ±0.05)

SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS:
 - RATING: 12V, 1A.
 - CONTACT RESISTANCE: 50mΩ MAX.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE.
 - INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500 VDC.
- MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE : 0.4~3.0 KGF
 - WITHDRAWAL FORCE : 0.3~2.0 KGF
- LIFE TEST: 5,000 CYCLES MIN.
- OTHER GENERAL SPEC. TO REFER "2SJ2285 SERIES SPEC."
- TO CONFORM TO THE SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- HALOGEN FREE PRODUCT IDENTIFICATION MARK ON JACK: ○
- HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING: ○
- FOR REFLOW SOLDERING LEAD-FREE PROCESS.
- PACKAGING: TAPE&REEL.



NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
A	BODY	1	HIGH TEMP.THERMOPLASTIC UL 94V-0	BLACK
B	EARTH	1	COPPER ALLOY 0.20T	GOLD FLASH
C	TIP	1	COPPER ALLOY 0.25T	
D	RING	1	COPPER ALLOY 0.20T	
E	MAKE TERMINAL	1	COPPER ALLOY 0.20T	Gold Flash on contact area and Solder, tail all over Nickel Plated
F	TRANSFER TERMINAL	1	COPPER ALLOY 0.20T	
G	SHIELD	1	COPPER ALLOY 0.20T	Gold Flash on contact area, all over Nickel Plated
H	MYLAR	1	MYLAR 0.075T	

DECIMALS:	ANGLES:
X :±0.5	X :±2°
X.X :±0.3	X.X :±1°
X.XX :±0.2	

TITLE	3.50 PHONE JACK
DWN	ZLS 14/8/14 PART NO. 2SJ2326-019111F
CHKD	BILLY 14/8/14 SCALE 3:1 UNIT: mm
APVD	ZIZ 14/8/14 SIZE: A3 SHEET: 10F1 REV: B

Singatron Enterprise Co., Ltd.
信登企業股份有限公司

CUSTOMER COPY