

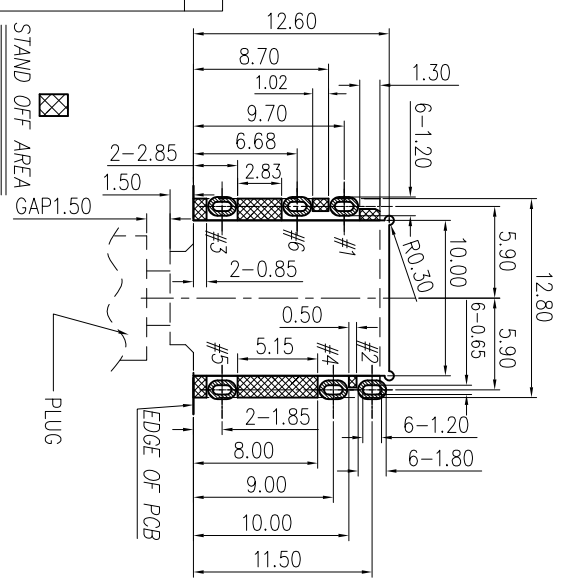


Product application:
The spring working position when Plug-In.

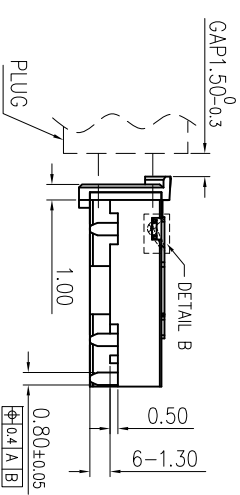

RECOMMENDED P.C.B. LAYOUT T=1.2
TOP VIEW (TOLERANCE: ±0.05)



DATE CODE

SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS:
 - RATING: 12V, 1A.
 - CONTACT RESISTANCE: 50mΩ MAX.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE.
 - INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500 VDC.
- MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE : 0.4~3.0 KGf
 - WITHDRAWAL FORCE : 0.3~2.0 KGf
- LIFE TEST: 5,000 CYCLES MIN.
- OTHER GENERAL SPEC. TO REFER "2SJ2285 SERIES SPEC".
- TO CONFORM TO THE SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- HALOGEN FREE PRODUCT IDENTIFICATION MARK ON JACK: ◎
- HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING: ◎
- FOR REFLOW SOLDERING LEAD-FREE PROCESS.
- PACKAGING: TAPE&REEL.



H	MYLAR	1	MYLAR 0.075T	YELLOW
G	SHIELD	1	COPPER ALLOY 0.20T	Gold flash on contact area and Nickel Plated on other area
F	TRANSFER TERMINAL	1	COPPER ALLOY 0.20T	
E	MAKE TERMINAL	1	COPPER ALLOY 0.20T	
D	RING	1	COPPER ALLOY 0.20T	Gold flash on contact area and Solder fill all over Nickel Plated
C	TIP	1	COPPER ALLOY 0.25T	
B	EARTH	1	COPPER ALLOY 0.20T	GOLD FLASH
A	BODY	1	HIGH TEMP THERMOPLASTIC UL 94V-0	BLACK
NO DESCRIPTION		QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS:		ANGLES:	TITLE	
X	:±0.5	X	:±2°	3.5φ PHONE JACK
X.X	:±0.3	X.X	:±1°	
X.XX	:±0.2			
SINGATRON ENTERPRISE CO., LTD. 信音企業股份有限公司				
PART NO. 2SJ2326-032111F				
SCALE 3:1 UNIT: mm				
SHEET: 10F1 REV: A				
CUSTOMER COPY				

REV	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	ZLS	2013.03.04