


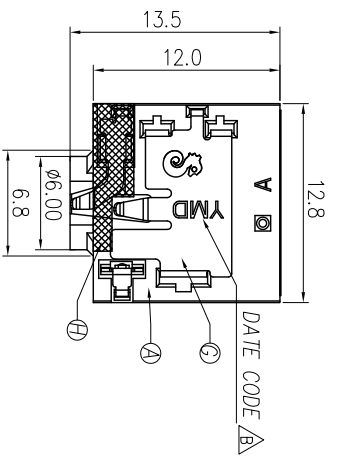

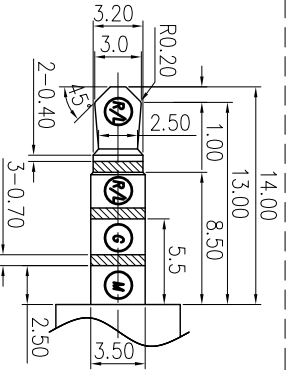
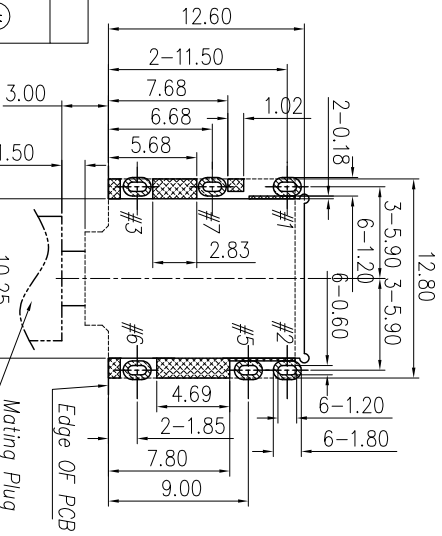


REV	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	ZLS	2013.08.22
B	ECN NO.: 014A0032 UPDATE DATE CODE	ZLS	2014.7.14

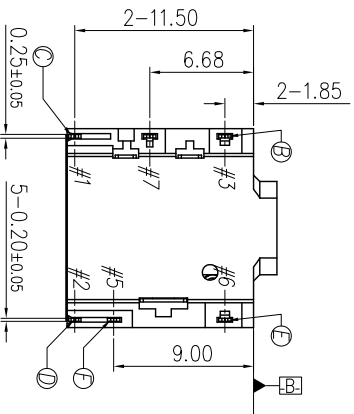

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:
 - 1-1. RATING: 12V 1A
 - 1-2. CONTACT RESISTANCE: 50m ΩMAX.
 - 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE.
 - 1-4. INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500 VDC
2. MECHANICAL CHARACTERISTICS:
 - 2-1. INSERTION FORCE : 0.4~3.0 KGf
 - 2-2. WITHDRAWAL FORCE : 0.3~2.0 KGf
3. LIFE TEST: 5,000 CYCLES
4. OTHER GENERAL SPEC.: TO REFER "2SJ2326 SERIES SPEC."
5. TO CONFORM TO THE SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
6. HALOGEN FREE PRODUCT IDENTIFICATION MARK ON JACK: Ⓢ
7. HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING: Ⓢ
8. FOR REFLOW SOLDERING LEAD-FREE PROCESS.

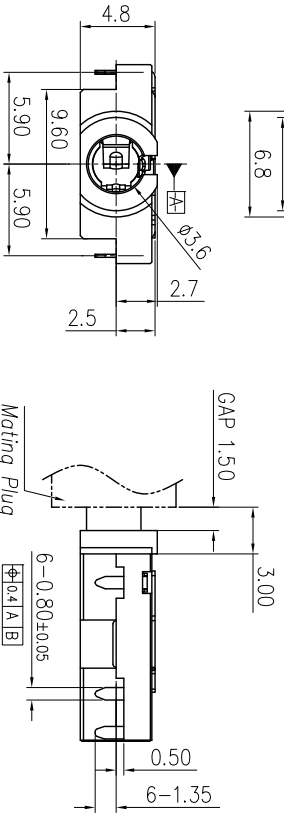

RECOMMENDED P.C.B. LAYOUT T=1.00
TOP VIEW (TOLERANCE: ±0.05)



NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
A	BODY	1	HIGH TEMP. THERMOPLASTIC UL 94V-0	BLACK
B	EARTH	1	COPPER ALLOY 0.20T	Gold flash on contact area and Solder fill all over Nickel Plated
C	TIP	1	COPPER ALLOY 0.25T	Gold flash on contact area and Solder fill all over Nickel Plated
D	RING	1	COPPER ALLOY 0.20T	Gold flash on contact area and Solder fill all over Nickel Plated
E	MAKE TERMINAL	1	COPPER ALLOY 0.20T	Gold flash on contact area and Solder fill all over Nickel Plated
F	TRANSFER TERMINAL	1	COPPER ALLOY 0.20T	Gold flash on contact area and Solder fill all over Nickel Plated
G	SHIELD	1	COPPER ALLOY 0.20T	Gold flash on contact area all over Nickel Plated
H	MYLAR	1	0.075T	YELLOW
I	MYLAR	1	0.075T	YELLOW

UNLESS OTHERWISE SPECIFIED TOLERANCES:
DECIMALS: ANGLES:

TITLE	DATE	SCALE	SHEET	REV.
DMW	14/7/21	3:1	10F1	B
CHKD	14/7/21	3:1	10F1	B
APVD	14/7/21	3:1	10F1	B

