
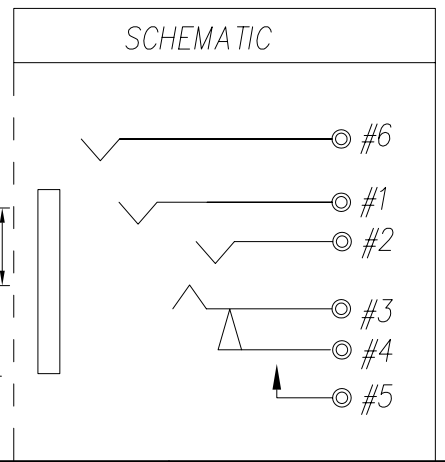
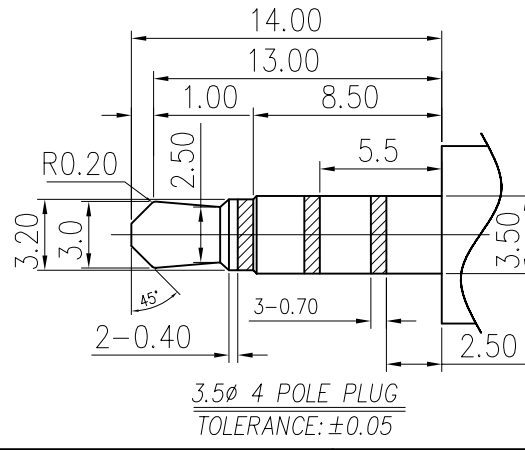
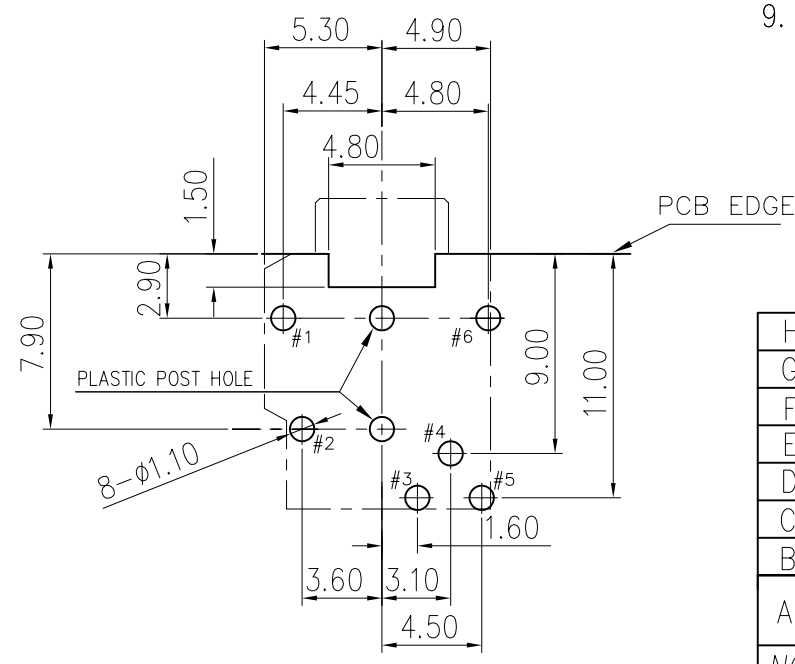
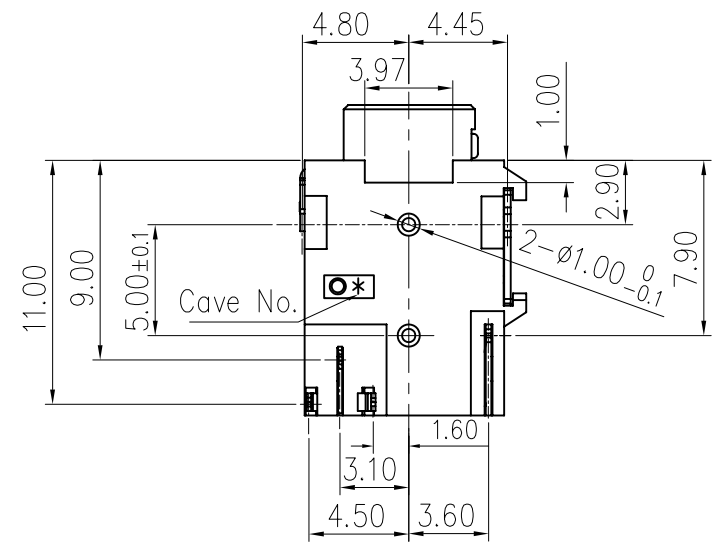
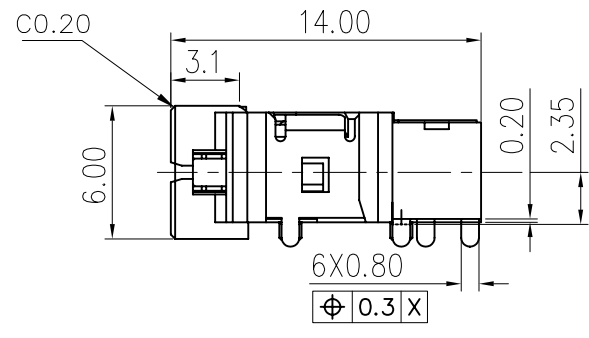
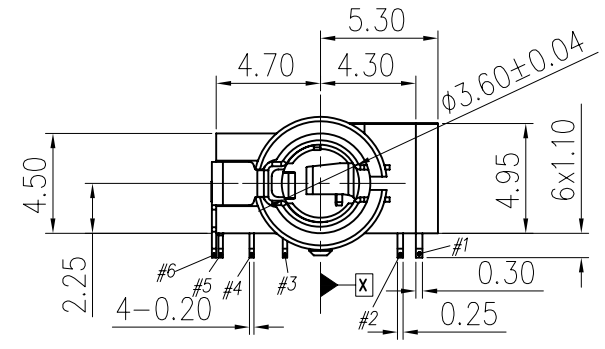
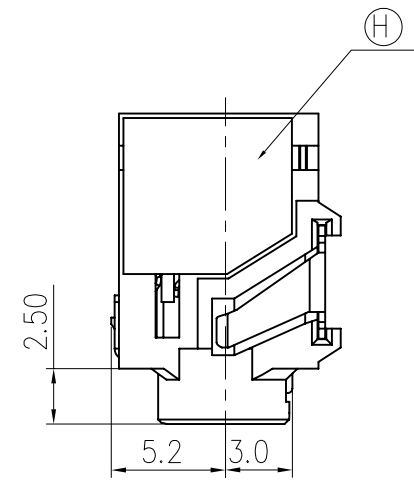



REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	WANG-TANG	12/08/15'

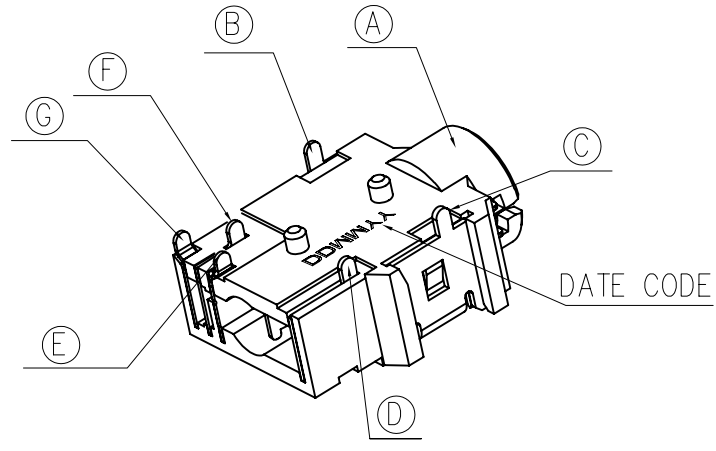


RECOMMENDED P.C.B. LAYOUT T=1.20  
TOP VIEW (TOLRANCE: ±0.05)

SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS:
  - 1-1. RATING: 1A MAX.
  - 1-2. CONTACT RESISTANCE: 50mΩ MAX.
  - 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE.
  - 1-4. INSULATION RESISTANCE: 100 MEASURED BY 500V DC
- MECHANICAL CHARACTERISTICS:
  - 2-1. INSERTION FORCE : 0.3~4.0 KGF
  - 2-2. WITHDRAWAL FORCE : 0.3~4.0 KGF
- LIFE TEST: 5,000 CYCLES .
- OTHER GENERAL SPEC. TO REFER "2.5φ3.5φ PHONE JACK SPEC"
- TO CONFORM TO THE SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- HALOGEN FREE PRODUCT IDENTIFICATION MARK ON JACK: Ⓞ
- HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING: 
- FOR REFLOW SOLDERING LEAD-FREE PROCESS.
- PACKAGING: TAPE & REEL.

H	MYLAR	1	0.10T	YELLOW TRANSPARENT
G	BREAK TERMINAL	1	COPPER ALLOY 0.20T	Gold flash on contact area,sn plated on solder tid,all over nickel plated
F	TRANSFER TERMINAL	1	COPPER ALLOY 0.20T	
E	RING A	1	COPPER ALLOY 0.20T	Plating Sn
D	TIP	1	COPPER ALLOY 0.25T	
C	RING B	1	COPPER ALLOY 0.30T	Gold flash
B	EARTH	1	COPPER ALLOY 0.20T	
A	BODY	1	HIGH TEMP.THERMOP LASTIC UL 94V-0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES		 Singatron Enterprise Co., Ltd. 信音企業股份有限公司		
DECIMALS:	ANGLES:	TITLE	3.5φ PHONE JACK	
X : ±0.5	X : ±2°	DWN	Wang-Tang 15/12/14 PART NO. 2SJ2349-006111F	
X.X : ±0.3	X.X : ±1°	CHKD	Stone-Zhu 15/12/14	SCALE B: 1 UNIT: mm
X.XX : ±0.2		APVD	Zjz-Zhou 15/12/14	SIZE: A3 SHEET: 10F1 REV: A
<b>CUSTOMER COPY</b>				