



SCHEMATIC

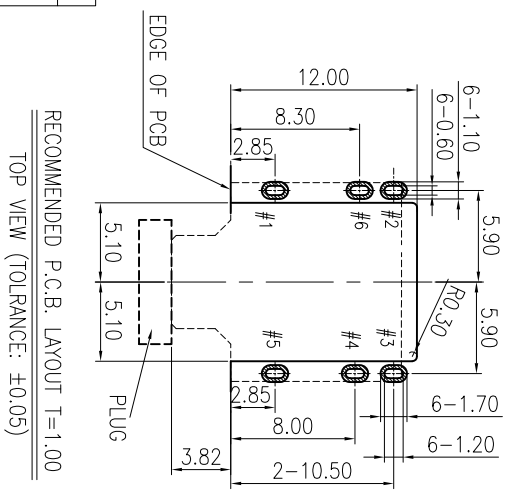

RECOMMENDED P.C.B. LAYOUT T=1.00
TOP VIEW (TOLERANCE: ±0.05)

- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
 - RATING: 12V, 1A.
 - CONTACT RESISTANCE: 50mΩ MAX.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE.
 - INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500 VDC.
 - MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE : 0.4~3.0 KGF
 - WITHDRAWAL FORCE : 0.3~3.0 KGF
 - LIFE TEST: 5,000 CYCLES.
 - OTHER GENERAL SPEC. TO REFER "2SJ2367-001111F SPEC".
 - TO CONFORM TO THE SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - HALOGEN FREE PRODUCT IDENTIFICATION MARK ON JACK: ©
 - HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING: ©
 - FOR REFLOW SOLDERING LEAD-FREE PROCESS.
 - PACKAGING: TAPE & REEL.



REV	ECN NO	OR DESCRIPTION	REVISED	DATE
A		PRODUCT RELEASE	BILLY	2013.10.18
B	ECN NO.:C130267 ADD NYLAR		ZLS	2014.3.12

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
A	BODY	1	HIGH TEMP THERMOPLASTIC UL 94V-0	BLACK
H	NYLAR	1	0.075T	YELLOW
G	SHIELD	1	COPPER ALLOY 0.20T	Gold flash on contact area over Ni 40U Min.plating
F	TRANSFER TERMINAL	1	COPPER ALLOY 0.20T	
E	MAKE TERMINAL	1	COPPER ALLOY 0.20T	Gold flash on contact area and solder tail,all over
D	RING	1	COPPER ALLOY 0.25T	Ni 40U Min. plating
C	TIP	1	COPPER ALLOY 0.25T	
B	EARTH	1	COPPER ALLOY 0.20T	

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X : ±0.5	X : ±2°
X.X : ±0.3	X.X : ±1°
X.XX : ±0.2	

TITLE	PART NO.	SCALE	UNIT	SHEET	REV.
3.50 PHONE JACK	2SJ2367-001111F	3:1	mm	10F1	B

Singatron Enterprise Co., Ltd.
信音企業股份有限公司

CUSTOMER COPY