

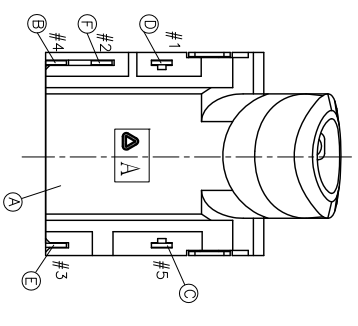
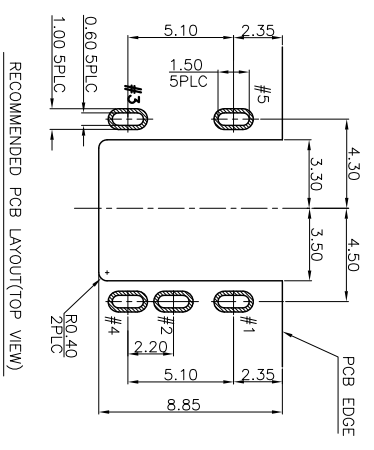
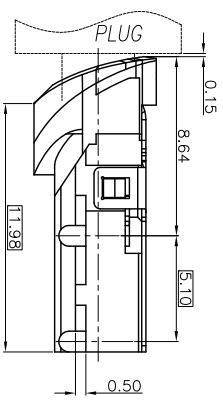
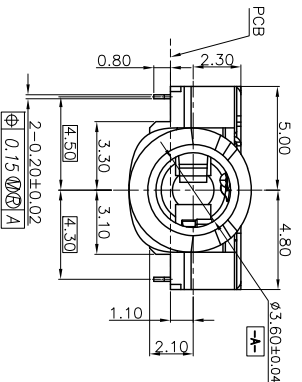
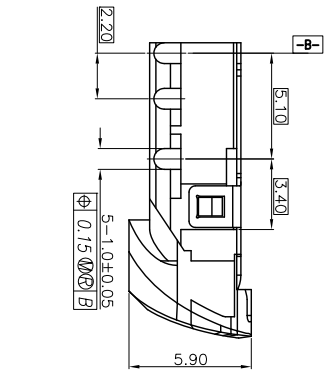
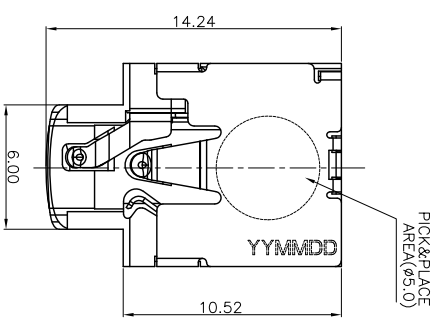
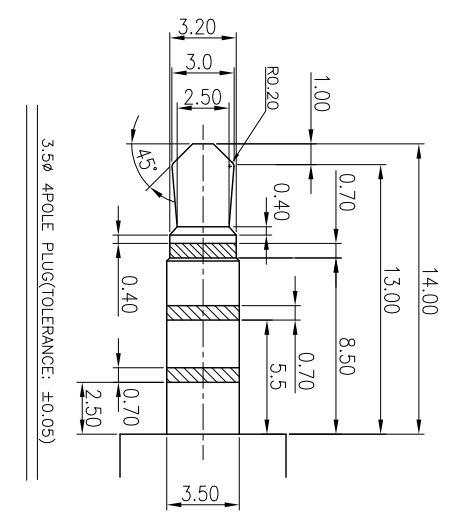


REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO: T120528-8A		Eileen	2012.07.18
B	ECN NO: S120835		Angus	2012.08.14

- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
 - RATING: 12V 1A
 - CONTACT RESISTANCE: 30mΩ MAX.(INITIAL)
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE.
 - INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500 VDC.
 - MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE : 0.3~3.0 Kgf
 - WITHDRAWAL FORCE : 0.2~3.0 Kgf
 - LIFE TEST: 5,000 CYCLES MIN.
 - OTHER GENERAL SPEC. TO REFER "
- "SINGATRON Ø2.5 Ø3.5 PHONE JACK SPEC".
- TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - GREEN PRODUCT IDENTIFICATION MARK ON JACK: 
 - GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **GR-PASS**
 - FOR REFLOW SOLDERING LEAD-FREE PROCESS.
 - PLEASE PUT THE PRODUCT IN A CONDITION WHERE IS FULL OF NITROGEN DURING IR REFLOW PROCESSING.



F	TIP SPRING	1	PHOSPHOR BRONZE 0.20I	GOLD FLASH ON CONTACT & SOLDER TAIL AREA: ALL OVER IN 50μ" PLATING.
E	RING-A	1	PHOSPHOR BRONZE 0.2I	
D	EARTH	1	PHOSPHOR BRONZE 0.2I	GOLD FLASH ON CONTACT AREA: SN 120μ" ON SOLDER TAIL AREA: ALL OVER IN 50μ" PLATING.
C	RING-B-R	1	PHOSPHOR BRONZE 0.2I	
B	SHLL	1	PHOSPHOR BRONZE 0.2I	可鍍層 IN 60μ" MIN
A	BODY	1	HIGH TEMP.THERMOPLASTIC UL 94V-0	WHITE
UNLESS OTHERWISE SPECIFIED TOLERANCES		SINGATRON ENTERPRISE CO., LTD. 信營企業股份有限公司		
DECIMALS:		TITLE: Ø3.50 AUDIO JACK		
ANGLES:		DWN Angus PART NO. 23J3035-018111H		
X.X		CHKD Tom SCALE:4:1 UNIT: mm		
X.XX		APVD Max SIZE: A3 SHEET: 1 OF 1 REV:B		
		CUSTOMER COPY		