
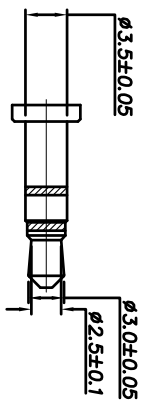

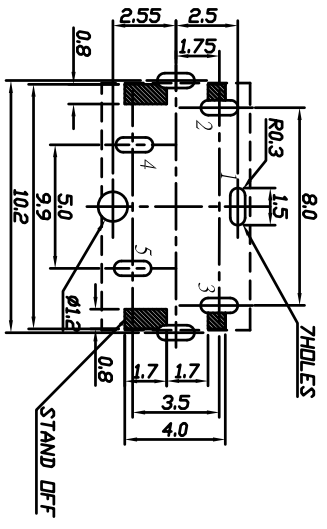
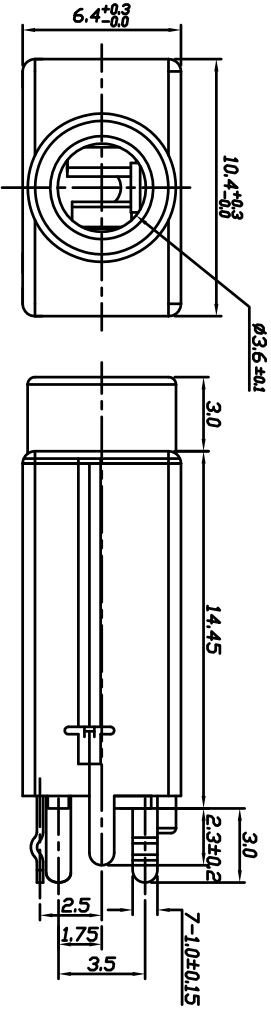


REV. ECN NO OR DESCRIPTION	REVISED	DATE
A PDR RELEASE	Even	2013.05.22

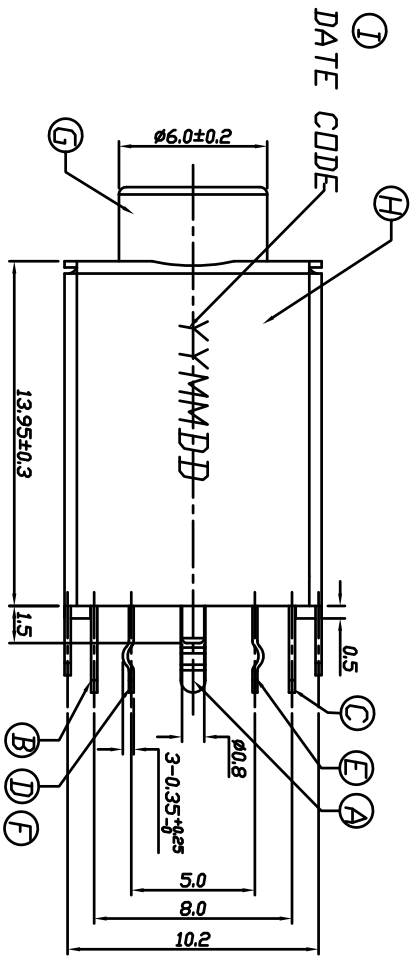

SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS:
  - CONTACT RESISTANCE: 30mΩ MAX.
  - INSULATION RESISTANCE: 100MΩ MIN. @ 500V DC.
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
- MECHANICAL CHARACTERISTICS:
  - INSERTION FORCE: 0.4~3.0kgf
  - WITHDRAWAL FORCE: 0.3~3.0kgf
- LIFE TEST: 5,000 CYCLES.
- OTHER GENERAL SPEC. TO REFER "2SJ3057 SERIES SPEC".
- TO CONFORM TO THE SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING.
- PACKAGE: SEE "2SJ3057 SERIES" PACKAGE.
- FOR REFLOW SOLDERING LEAD-FREE PROCESS.


PART NO.

2SJ3057-100011F

- SHELL PIN LENGTH: 1: 2.3mm
- SUFFIX: HALOGEN FREE
- PACKAGE: 1: TRAY
- HOUSING COLOR: 1: BLACK
- CONTACT PLATING: 0: GOLD FLASH OVER 50u" NICKEL MIN.

I	INK	-	INK	BLACK
H	SHELL	1	STAINLESS STEEL	NICKEL
G	HOUSING	1	LCP+30%GFUL 94V-0	BLACK
F	INSULATOR	1	HI-TEMP PLASTICUL 94V-0	BLACK
E	BREAK TERMINAL	1	COPPER ALLOY,t=0.25	SEE PART NO.
D	TRANSFER TERMINAL	1	COPPER ALLOY,t=0.20	SEE PART NO.
C	RING TERMINAL	1	COPPER ALLOY,t=0.20	SEE PART NO.
B	TIP TERMINAL	1	COPPER ALLOY,t=0.25	SEE PART NO.
A	EARTH TERMINAL	1	COPPER ALLOY,t=0.25	SEE PART NO.
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES



信音企業股份有限公司

TITLE	3.5mm MINIATURE JACK
DWN	2013.05.22
CHKD	SCALE 1:1
APVD	SIZE: A3

DECIMALS:	ANGLES:	TITLE	3.5mm MINIATURE JACK
X : ±0.5	X : ±2°	PART NO.	2SJ3057-100011F
X.X : ±0.3	X.X : ±1°	SCALE	1:1
X.XX : ±0.2		UNIT:	mm
		SHEET:	1 OF 1
		REV:	A

T:1.6 Dimensions of PC board holes  
Tolerance : ±0.05(Printed-top view)

MARKED STAND OFF AREA

RECOMMENDED MATING 3.50mm PLUG

