
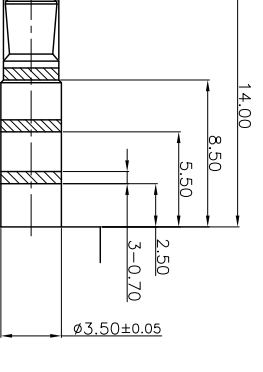
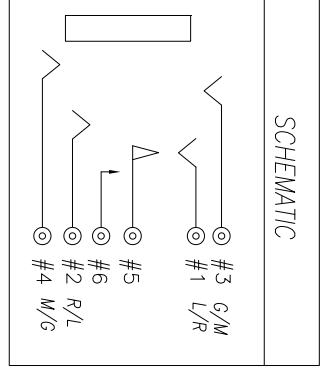

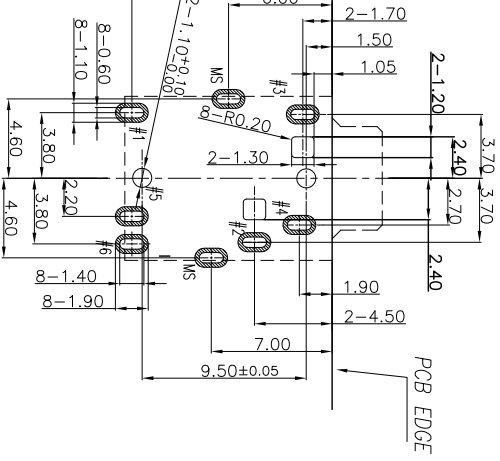


A B C D E F

1 2 3 4 5 6 7 8

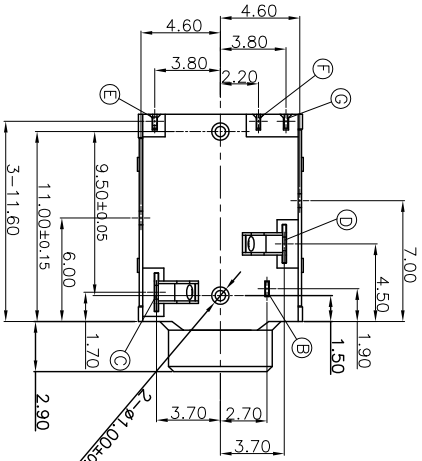

1. INSULATION RESISTANCE BETWEEN ANY ADJACENT OPEN CIRCUIT TERMINAL SHELL NOT BE LESS THAN 100MΩ MEASURED BY 500 VDC.

2. CONTACT RESISTANCE: 50mΩMAX.

3. INSULATION VOLTAGE WITHSTAND:500V AC FOR ONE MINUTE.

4. UNLESS OTHERWISE SPECIFIED, TEST IS TO BE MADE AT 5-35°C IN TEMPERATURE AND 45-65% IN HUMIDITY. BUT,IF ANY VAGUE DATA IS OCCURED ON TEST RESULT, ANOTHER TEST SHALL BE MADE AT 20°C±2°C IN TEMP., 60-70% IN HUMIDITY.


5. LIFE TEST: 5,000 CYCLES.

6. INSERTION FORCE: 0.3 - 3.0Kg.

7. WITHDRAWAL FORCE: 0.3 - 3.0Kg.


8. AFTER LIFE TEST, CONTACT RESISTANCE: 60mΩ MAX.


9. AFTER HUMIDITY TEST, INSULATION RESISTANCE: 50MΩ MIN.

10. MARKING: MARK "  " ON TOP OF CONNECTOR.

11. PACKING: TAPE & REEL.

12. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.

13. HALOGEN FREE PRODUCT IDENTIFICATION MARK ON JACK: .

14. HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING: .

I	SHELL	1	COPPER ALLOY, 0.2t	NICKEL 60u" MIN. PLATING.
H	SEPERATE	1	HIGH TEMP.THERMOPLASTIC UL 94V-0	BLACK
G	WAKE TERMINAL	1	COPPER ALLOY, 0.2t	
F	TRANSFER TERMINAL	1	COPPER ALLOY, 0.2t	
E	TIP SPRING	1	COPPER ALLOY, 0.25t	GOLD FLASH ON CONTACT AREA, MATE Sn 120u" ON SOLDER TAIL, ALL OVER NICKEL 50u" MIN. PLATING.
D	RING-A	1	COPPER ALLOY, 0.2t	
C	RING-B	1	COPPER ALLOY, 0.2t	
B	EARTH	1	COPPER ALLOY, 0.2t	
A	BODY	1	HIGH TEMP.THERMOPLASTIC UL 94V-0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES		DECIMALS:		ANGLES:	
X	±0.5	X	±2°	X	±1°
X	±0.3	X	X: ±1°	X	X: ±1°
X	±0.2	X	X: ±1°	X	X: ±1°
TITLE: Ø3.50 AUDIO JACK					
DWN	Bruce	PART NO.	2SJ3062-003111F		
CHKD	Sky	SCALE:4:1	UNIT: mm		
APVD	Lussen	SIZE: A3	SHEET: 1 OF 1	REV: A	
CUSTOMER COPY					

 Singatron Enterprise Co., Ltd.
信管企業股份有限公司

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
A	PDR NO: TT20511-3A	BRUCE	2012.11.27