




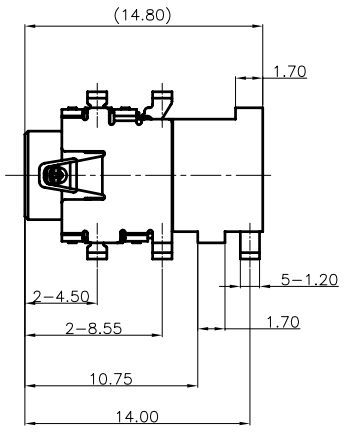
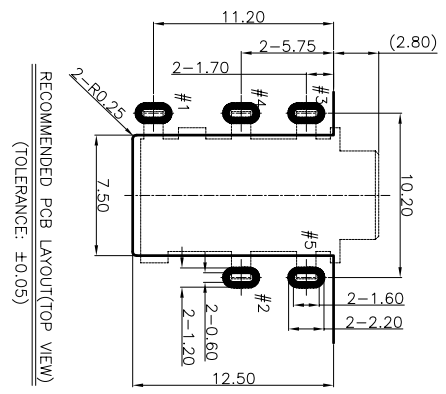
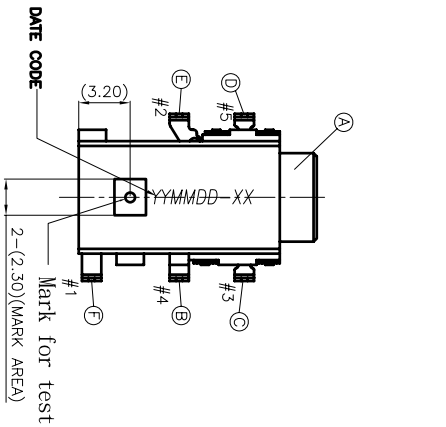


REV. ECN NO. OR DESCRIPTION	REVISED	DATE
A PDR NO. ST11230-5A	HMJIANG	2012.06.20

- SPECIFICATIONS:
- INSULATION RESISTANCE BETWEEN ANY ADJACENT OPEN CIRCUIT TERMINAL SHELL NOT BE LESS THAN 100MΩ MEASURED BY 500 VDC MEGGER.
 - CONTACT RESISTANCE: 60mΩ MAX.
 - INSULATION VOLTAGE WITHSTAND: 500V AC FOR ONE MINUTE.
 - UNLESS OTHERWISE SPECIFIED, TEST IS TO BE MADE AT 5-35°C IN TEMPERATURE AND 45-85% IN HUMIDITY. BUT IF ANY VAGUE DATA IS OCCURED ON TEST RESULT, ANOTHER TEST SHALL BE MADE AT 20°C±1°C IN TEMP., 63-67% IN HUMIDITY.
 - LIFE TEST: 5,000 CYCLES
 - INSERTION FORCE: 0.3 - 2.5kg.
 - WITHDRAWAL FORCE: 0.45 - 2.5kg.
 - AFTER HUMIDITY TEST, INSULATION RESISTANCE: 100MΩ MIN.
 - PACKAGING : TAPE & REEL.
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING.



Ⓞ DUMMY CONTACT

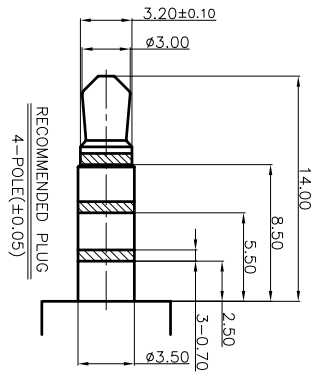

RECOMMENDED PCB LAYOUT(TOP VIEW)
(TOLERANCE: ±0.05)

G	DUMMY	1		Ni 50μ" OVER
F	TIP	1		
E	RING-A	1	COPPER ALLOY, 0.2t	GOLD FLASH ON CONTACT AREA & SOLDER AREA.
D	RING-B2	1		ALL OVER Ni 50μ" MIN. PLATING.
C	RING-B1	1		
B	EARTH	1		
A	BODY	1	HIGH TEMP.THERMOPLASTIC UL 94V-0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singatron Enterprise Co., Ltd. 信營企業股份有限公司				
TITLE		ø3.50 AUDIO JACK		
DWN	HM-JIANG	PART NO.	2S13074-000111P	
CHKD	BRUCE	SCALE:	4:1	UNIT: mm
APVD	LUSSEN	SIZE:	A3	SHEET: 1 OF 1
CUSTOMER COPY				
DECIMALS:		ANGLES:		
X	:±0.5	X	:±2°	
X.X	:±0.3	X.X	:±1°	
X.XX	:±0.2			

