

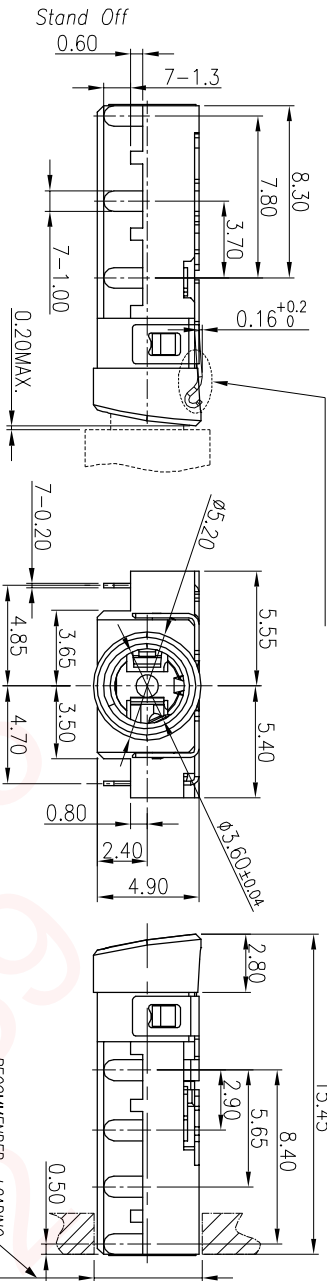

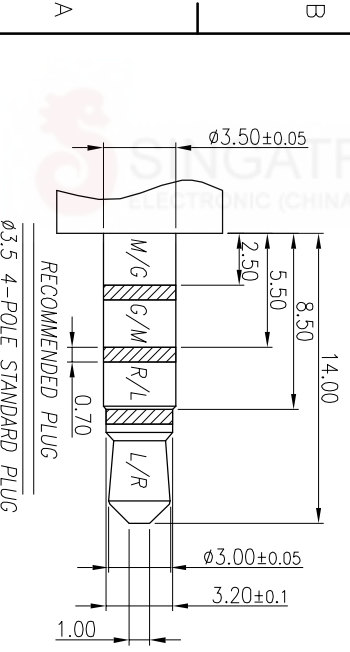
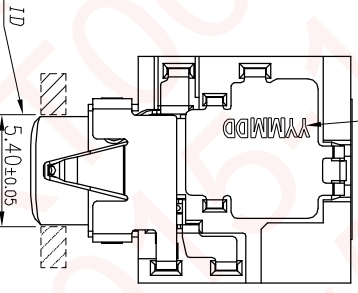


REV. EGN NO OR DESCRIPTION	REVISED	DATE
A PDR NO.: T150909-5A Ming	Ming	2015.09.09

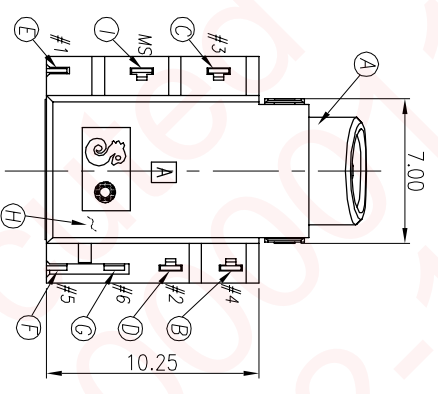

- SPECIFICATIONS:**
- ELECTRICAL CHARACTERISTICS:**
 - 1-1. RATING: 12V 1A
 - 1-2. CONTACT RESISTANCE: 50mΩ MAX.(INITIAL)
 - 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE.
 - 1-4. INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500V DC
 - MECHANICAL CHARACTERISTICS:**
 - 2-1. INSERTION FORCE : 0.3~3.0 KGF
 - 2-2. WITHDRAWAL FORCE : 0.3~3.0 KGF
 3. LIFE TEST: 5,000 CYCLES MIN.
 4. OTHER GENERAL SPEC. TO REFER "2SJ3080 SERIES SPEC."
 5. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 6. HALOGEN FREE PRODUCT IDENTIFICATION MARK ON PRODUCT:
 7. HALOGEN FREE PRODUCT IDENTIFICATION LOGO ON PACKAGING:
 8. FOR REFLOW SOLDERING LEAD-FREE PROCESS.
 9. HOUSING'S STRENGTH IS<3.0Kg

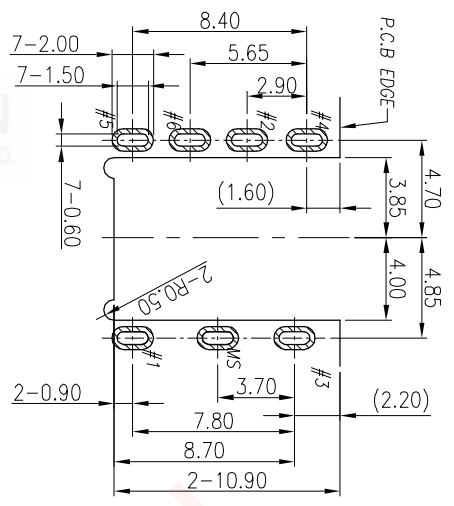

開關在#1, #2, #3, #4與plug 對應段都接觸后拔動

J	Mylar	1	KAPTON+GLUE 0.06t	YELLOW
I	SHELL	1	PHOSPHOR BRONZE 0.2t	N° 60U Min.
H	SEPARATOR	1	HIGH TEMP.THERMOPLASTIC UL 94V-0	BLACK
G	MAKE TERMINAL	1	PHOSPHOR BRONZE 0.2t	GOLD FLASH ON CONTACT AREA. ALL OVER 500° K.
F	TRANSFER TERMINAL	1	PHOSPHOR BRONZE 0.2t	GOLD FLASH ON CONTACT AREA. ALL OVER 500° K.
E	TIP SPRING	1	PHOSPHOR BRONZE 0.2t	GOLD FLASH ON CONTACT AREA.
D	RING A	1	PHOSPHOR BRONZE 0.2t	Made in 1200° ON SOLDER AREA.
C	RING B	1	PHOSPHOR BRONZE 0.2t	ALL OVER 500° K.
B	EARTH	1	PHOSPHOR BRONZE 0.2t	
A	BODY	1	HIGH TEMP.THERMOPLASTIC UL 94V-0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X :±0.5 X :±2°
X.X :±0.3 X.X :±1°
X.XX :±0.2

Singatron Enterprise Co., Ltd.
信亨企業股份有限公司

3.5Ø PHONE JACK

PART NO. 2SJ3080-097111F
SCALE 4:1 UNIT: mm

CHECKED: Bruce
APVD: Lussen

SHEET: 1 OF 1 REV: A

CUSTOMER COPY