



REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO. T120814-8A	Aaron		2013.04.01
B	ECN NO. S130536	Cerry		2013.07.24

- SPECIFICATIONS:
- INSULATION RESISTANCE BETWEEN ANY ADJACENT OPEN CIRCUIT TERMINAL SHELL NOT BE LESS THAN 100MΩ
 - CONTACT RESISTANCE: 50mΩ MAX.
 - INSULATION VOLTAGE WITHSTAND: 500V AC FOR ONE MINUTE.
 - LIFE TEST: 5,000 CYCLES MIN. (NON-LOAD)
 - INSERTION FORCE: 0.3 - 3.0Kg.
 - WITHDRAWAL FORCE: 0.3 - 3.0kg.
 - PACKAGING: TAPE & REEL.
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 9. HALOGEN FREE PRODUCT IDENTIFICATION MARK ON PRODUCT: ☉
 10. HALOGEN FREE PRODUCT IDENTIFICATION LOGO ON PACKAGING: ☉
 11. PRINTED DATE CODE "SYMMD" ON TOP OF CONNECTOR.

DD: DAY
MM: MONTH
YY: YEAR
英文字母 * S *

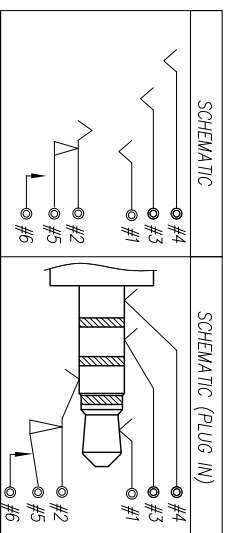

H	SEPARATOR	1	HIGH TEMP.THERMOPLASTIC	BLACK
G	SHIELDING	1	COPPER ALLOY, 0.2T	NICKEL 50U'' Min
F	EARTH	1	COPPER ALLOY, 0.2T	GOLD FLASH ON CONTACT, ALL OVER 60U'' NICKEL PLATING.
E	MAKE	1	COPPER ALLOY, 0.2T	
D	TIP	1	COPPER ALLOY, 0.2T	
C	TRANSFER	1	COPPER ALLOY, 0.1T	
B	RING SPRING	1	COPPER ALLOY, 0.1T	
A	BODY	1	HIGH TEMP.THERMOPLASTIC UL 94V-0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
 Singatron Enterprise Co., Ltd. 信晉企業股份有限公司				

DECIMALS: ANGLES:
 X : ±0.5 X : ±2°
 X.X : ±0.3 X.X : ±1°
 X.XX : ±0.2

TITLE: 3.5φ PHONE JACK
 DWG: Cerry
 CHKD: Mox
 APVD: Mox

PART NO. 2SJ3086-001111F
 SCALE: 4:1
 UNIT: mm
 SHEET: 1 OF 1

REV: B

CUSTOMER COPY