
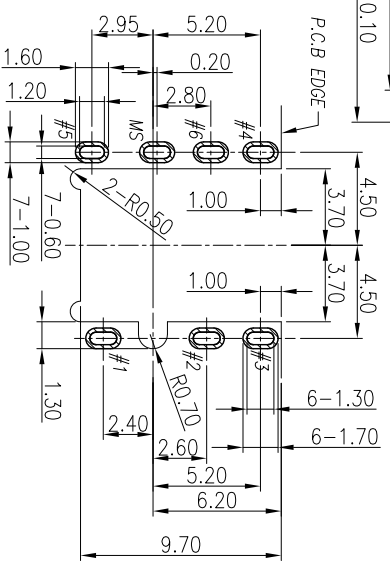
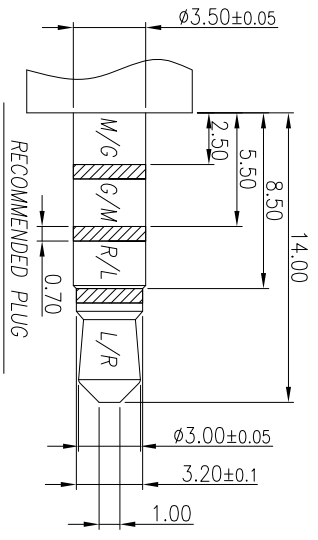
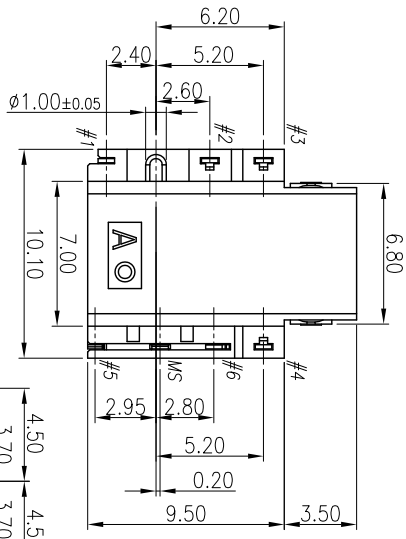

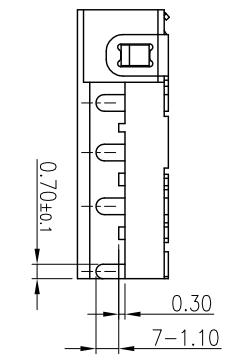
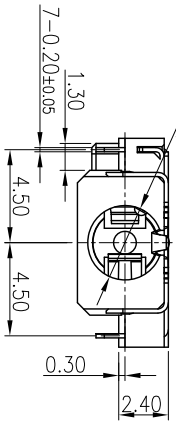
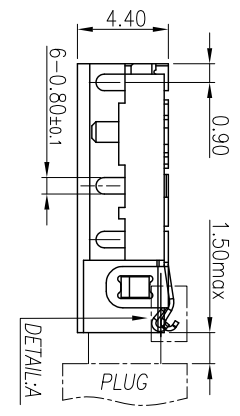

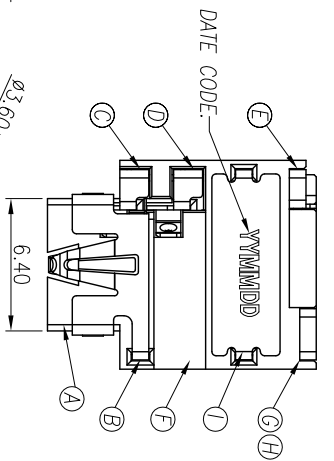


REV	ECN NO	OR	DESCRIPTION	REVISED	DATE
A	PDR NO: T140704-1A		Owen	2014.11.26	
B	ECN NO: S150216-C	△	Owen	2015.4.3	

**SPECIFICATIONS:**

- INSULATION RESISTANCE BETWEEN ANY ADJACENT OPEN CIRCUIT TERMINAL SHELL NOT BE LESS THAN 100MΩ MEASURED BY 500 VDC.
- CONTACT RESISTANCE: 50mΩ MAX(INITIAL).
- INSULATION VOLTAGE WITHSTAND:500V AC FOR ONE MINUTE.
- UNLESS OTHERWISE SPECIFIED. TEST IS TO BE MADE AT 5-35°C IN TEMPERATURE AND 45-85% IN HUMIDITY. BUT IF ANY VAGUE DATA IS OCCURED ON TEST RESULT, ANOTHER TEST SHALL BE MADE AT 20°C±2°C IN TEMP., 60-70% IN HUMIDITY.
- LIFE TEST: 5,000 CYCLES MIN.
- INSERTION FORCE: 0.3 - 3Kg.
- WITHDRAWAL FORCE: 0.2 - 3Kg.
- AFTER LIFE TEST, CONTACT RESISTANCE: 100mΩ MAX.
- AFTER HUMIDITY TEST, INSULATION RESISTANCE: 50MΩ MIN.
- MARKING: MARK "Ⓢ" ON TOP OF CONNECTOR.
- PACKING : TAPE & REEL.
- TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- HALOGEN FREE PRODUCT IDENTIFICATION MARK ON PRODUCT:
- HALOGEN FREE PRODUCT IDENTIFICATION LOGO ON PACKAGING:



NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
I	SHELL	1	SUS304-1/2H 0.2t	Ni 60U Min.
H	SEPARATOR	1	LCP+30%GF E130I UL 94V-0	BLACK
G	TRANSFER TERMINAL	1	C5210-EH TO.2	GOLD FLASH ON CONTACT AREA GOLD FLASH ON SOLDER AREA ALL OVER 50" Ni.
F	MAKE TERMINAL	1	C5210-EH TO.2	
E	TIP SPRING	1	C5210-EH TO.2	GOLD FLASH ON CONTACT AREA Made SOLDER ON SOLDER AREA
D	RING A	1	C5210-EH TO.2	
C	RING B	1	C5210-EH TO.2	ALL OVER 50" Ni.
B	EARTH	1	C5210-EH TO.2	
A	BODY	1	PA4T+30%GF, (TX1) UL 94V-0	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X :±0.5 X :±2°

X.X :±0.3 X.X :±1°

X.XX :±0.2

Singatron Enterprise Co., Ltd.  
信音企業股份有限公司

TITLE: 3.5Ø PHONE JACK

DWN Owen PART NO.2S13108-026111F

CHKD Bruce SCALE 4:1 UNIT: mm

APVD Lussen SIZE: A3 SHEET: 1 OF 1 REV: B

CUSTOMER COPY