


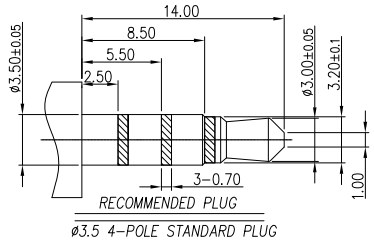

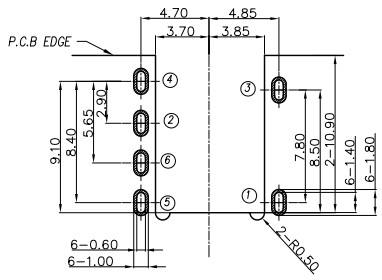




REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.: T140514-2A	Owen	2014.12.15



- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
 - RATING: 12V 1A
 - CONTACT RESISTANCE: 50mΩ MAX (INITIAL)
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE.
 - INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500V DC
 - MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE : 0.3~3.0 KGf
 - WITHDRAWAL FORCE : 0.3~3.0 KGf
 - LIFE TEST: 5,000 CYCLES
 - AFTER LIFE TEST, CONTACT RESISTANCE: 60mΩ MAX.
 - AFTER HUMIDITY TEST, INSULATION RESISTANCE: 50MΩ MIN.
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - HALOGEN FREE PRODUCT IDENTIFICATION MARK ON PRODUCT: ⊙
 - HALOGEN FREE PRODUCT IDENTIFICATION LOGO ON PACKAGING: ⊕



RECOMMENDED PCB LAYOUT(TOP VIEW), T=1.20mm
(TOLERANCE: ±0.05)

H	SEPARATOR	1	LCP+30%GF E130I UL 94V-0	BLACK
G	RING-B	1	CS210-EH, 0.20T	GOLD FLASH ON CONTACT AREA; GOLD FLASH ON SOLDER TAIL AREA; ALL OVER Ni 40u" PLATING.
F	EARTH	1	CS210-EH, 0.20T	
E	RING-A	1	CS210-EH, 0.20T	
D	MAKE	1	CS210-EH, 0.20T	
C	TRANSFER	1	CS210-EH, 0.20T	
B	TIP	1	CS210-EH, 0.20T	
A	BODY	1	PA10T+30%GF R630NH UL 94V-0	BLACK

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES			Singatron Enterprise Co., Ltd. 信音企業股份有限公司	
DECIMALS:	ANGLES:	TITLE: Ø3.50 AUDIO JACK		
X : ±0.5	X : ±2°	DWN	Owen	PART NO. 2SJ3132-001111F
X.X : ±0.3	X.X : ±1°	CHKD	Bruce	SCALE: 4:1 UNIT: mm
X.XX : ±0.2		APVD	Lussen	SIZE: A3 SHEET: 1 OF 1 REV: A
CUSTOMER COPY				