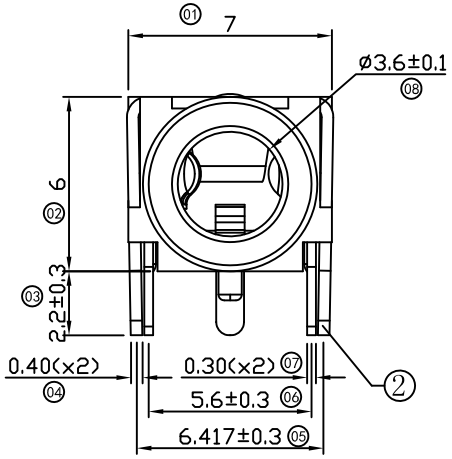

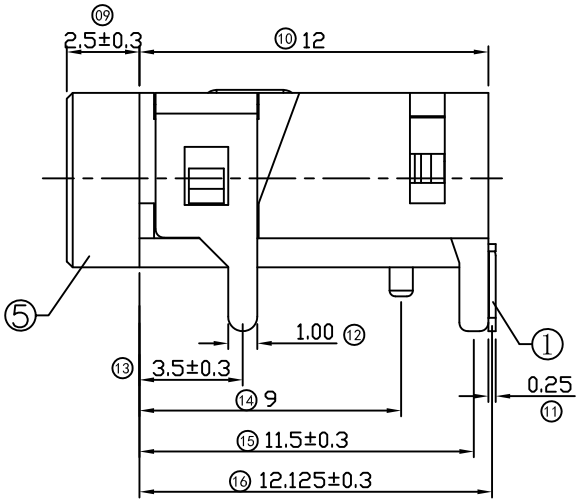

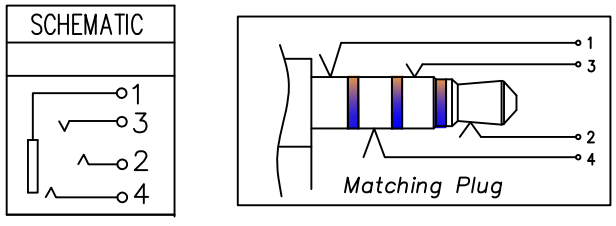

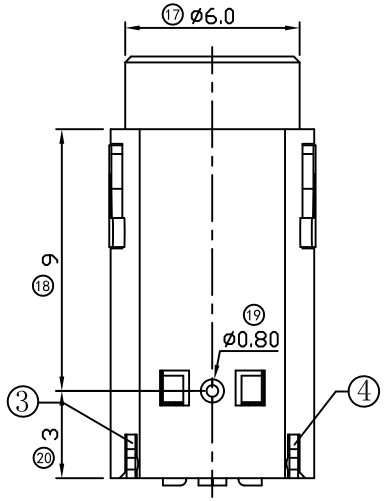

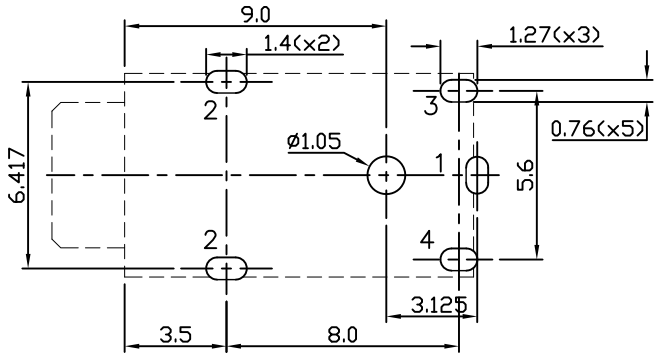

T:1.6 Dimensions of PC board holes

Tolerance : ±0.05(Printed-top view)

SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance: ≤0.03Ω;
3. Insulation resistance: ≥100MΩ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-30N;
6. life test: 5,000 cycles。



LTR	PART NAME	QTY	MATERIAL	REMARK
5	HOUSING	1	PA9T	UL-94V0(BLACK)
4	RING SPRING	1	C5191 t=0.30	MB:Ni (20u"min) Ag(8u"min) PLATED
3	RING SPRING	1	C5191 t=0.30	MB:Ni (20u"min) Ag(8u"min) PLATED
2	TIP SPRING	1	C2680 t=0.40	MB:Ni (20u"min) Ag(8u"min) PLATED
1	EARTHING SPRING	1	C5191 t=0.25	MB:Ni (20u"min) Ag(8u"min) PLATED

UNLESS OTHERWISE SPECIFED TOLERANCES

DECIMALS: X ± 0.3, X.X ± 0.2, X.XX ± 0.1, X.XXX ± 0.05

ANGLES: X ± 2°, X.X ± 1°

Singatron Enterprise Co., Ltd.

TITLE: MINIATURF JACK

DWN: LILY 2016.05.17 | PART NO. 2SJ321B-06DBT-T00

CHKD: ANDY 2016.05.17 | SCALE 1:1 | UNIT: mm

APVD: JON 2016.05.17 | SIZE: A3 | SHEET:1 OF 1 | REV: A

CUSTOMER COPY

文件編號 RD-06-043-A