
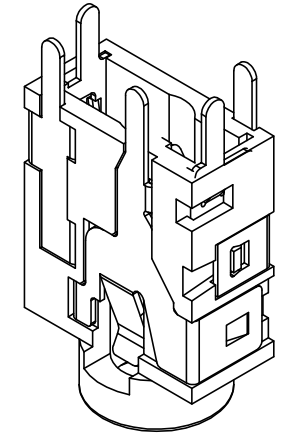
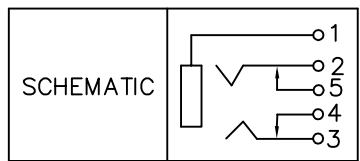

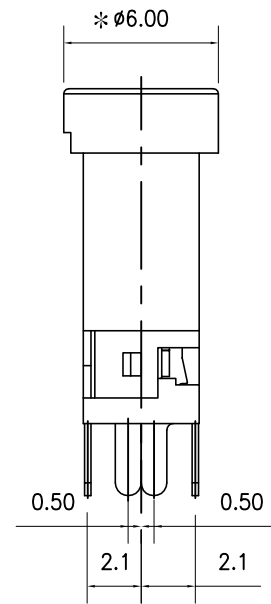


Recommend of PC Board Holes  
Tolerance : ±0.05(Top view)

- Notes:
- Electrical Characteristics:
    - Rating : DC 30V 0.5 A ;
    - Contact Resistance: 50mΩ Max.(Initial), 100mΩ Max.(Final) After test: ≤50mΩ ;
    - Dielectric Withstanding Voltage: 500V AC for One Minute ;
    - Insulation Resistance: 100MΩ Min. Measured By 500 VDC;
  - Mechanical Characteristics:
    - Plug Insertion Force 0.3~3.0Kgf (initial), 0.3~3.0Kgf (Final) life test;
    - Plug Extraction Force: 0.3~3.0Kgf (initial), 0.3~3.0Kgf (Final) life test;
  - Durability Test: 5,000 Cycles min;
  - Operating temperature:-25°C ~ +70°C;
  - Soldering Heat Resistance Wave soldering 230°C;
  - Plug Interface Dimensions Conform To EIAJ RC-5325A Spec;
  - Packaging:Plastic Bag;

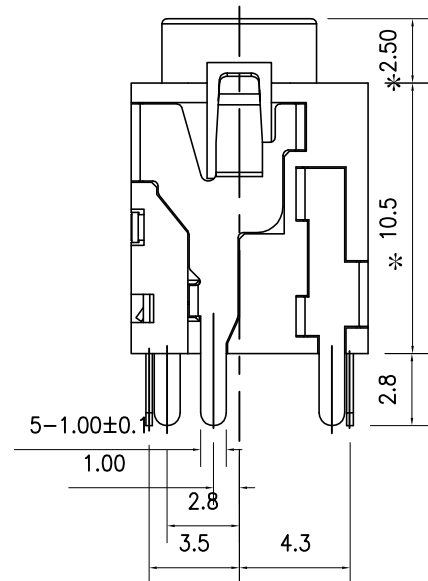

**LEAD FREE**

⑥	HOUSING	1	PA66	BLACK
⑤	TERMINAL 5#	1	C2680	t=0.25 MB:Ni Ag PLATED
④	TERMINAL 4#	1	C2680	t=0.25 MB:Ni Ag PLATED
③	TERMINAL 3#	1	C5191	t=0.25 MB:Ni Ag PLATED
②	TERMINAL 2#	1	C5191	t=0.25 MB:Ni Ag PLATED
①	TERMINAL 1#	1	C5191	t=0.25 MB:Ni Ag PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

UNLESS OTHERWISE SPECIFIED  
DIMENSION ARE IN CENTIMETERS  
TOLERANCE ARE :  
FRACTION DECIMALS ANGLE  
.X ± 0.3    ° ±5'  
.XX ± 0.2    ° ±3'  
.XXX ± 0.1

Singatron Enterprise Co., Ltd.				
TITLE	3.5φ Audio Jack VERTICAL TYPE			
DWN	BRAGG	PART NO. 2SJ3330-05DBT-T00		
CHKD	2008/01/10	SCALE 1:1	UNIT: mm	④
APVD	YORK	SIZE: A3	SHEET:1 OF 1	REV:
<b>CUSTOMER COPY</b>				