
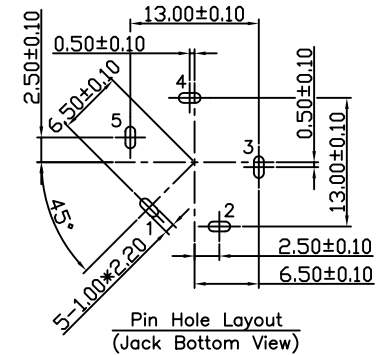
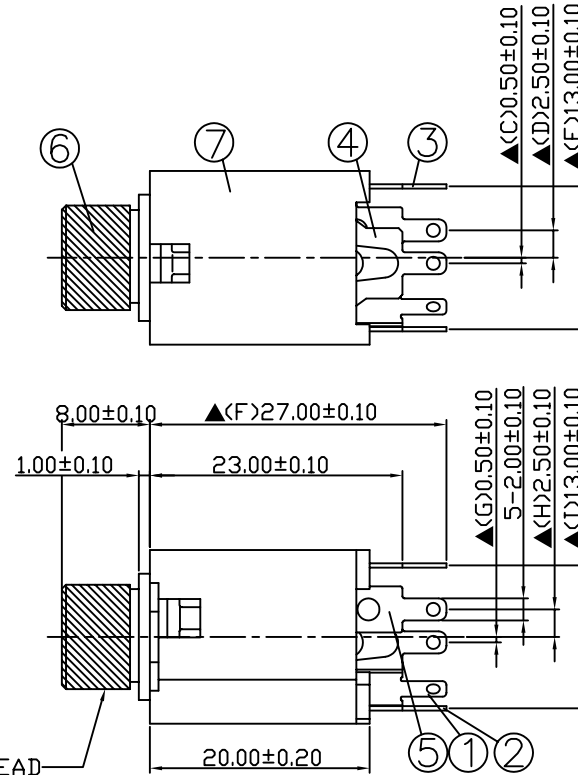



|           |   |
|-----------|---|
| SCHEMATIC |   |
| MODEL NO  | U |

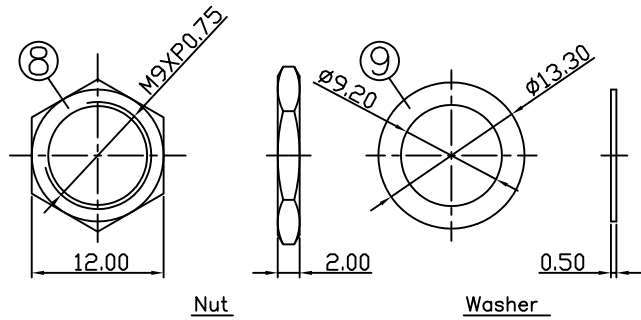

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

| NO. | Description    | Material             | Q'TY | Finish        |
|-----|----------------|----------------------|------|---------------|
| 9.  | Washer         | 0.5T Steel           | 1    | Nickel Plated |
| 8.  | Nut            | 2.0T Steel           | 1    | Nickel Plated |
| 7.  | Housing        | PBT                  | 1    | Black Color   |
| 6.  | Barrel         | Brass                | 1    | Nickel Plated |
| 5.  | Ring Shunt     | 0.4T Brass           | 1    | Silver Plated |
| 4.  | Ring Spring    | 0.4T Phosphor Bronze | 1    | Silver Plated |
| 3.  | Tip Spring     | 0.4T Phosphor Bronze | 1    | Silver Plated |
| 2.  | Tip Shunt      | 0.4T Brass           | 1    | Silver Plated |
| 1.  | Earth Terminal | 0.4T Brass           | 1    | Silver Plated |

SPECIFICATIONS:  
 Contact Resistance : 30mΩ max  
 Insulation Resistance : 100MΩ min. at DC 500V  
 Dielectric Withstanding Voltage: AC 500V for one minute  
 Remark: ▲: The Most Important Dimension

RoHS  
Compliant

For Reference  
僅供參考

Singatron Enterprise Co., Ltd.

|       |                 |                            |          |
|-------|-----------------|----------------------------|----------|
| TITLE | 6.3φ PHONE JACK |                            |          |
| DWN   | 10.12.2011      | PART NO. 2SJ648-M2NUS3B00G |          |
| CHKD  | SCALE 1:1       | UNIT: mm                   |          |
| APVD  | SIZE: A3        | SHEET: 1 OF 1              | REV: 2.0 |

CUSTOMER COPY