

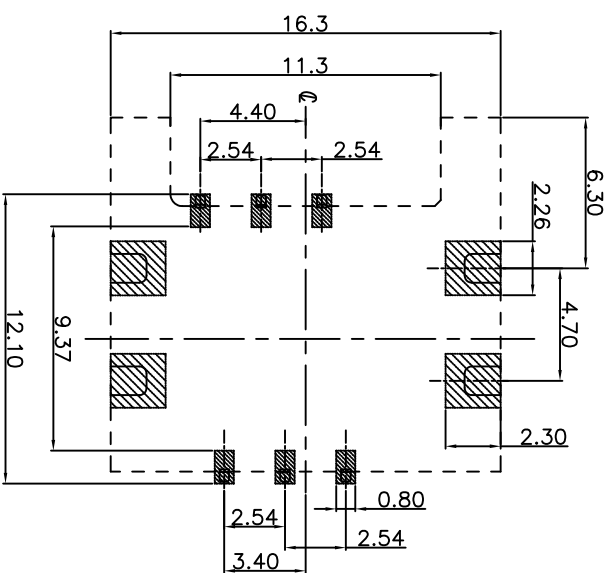
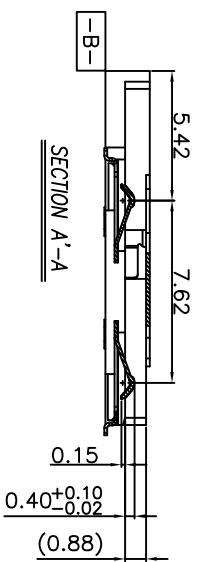
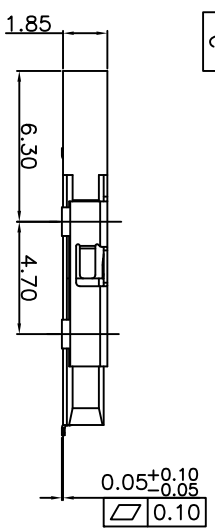


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO: T100706-2A	Bruce	2011.01.10

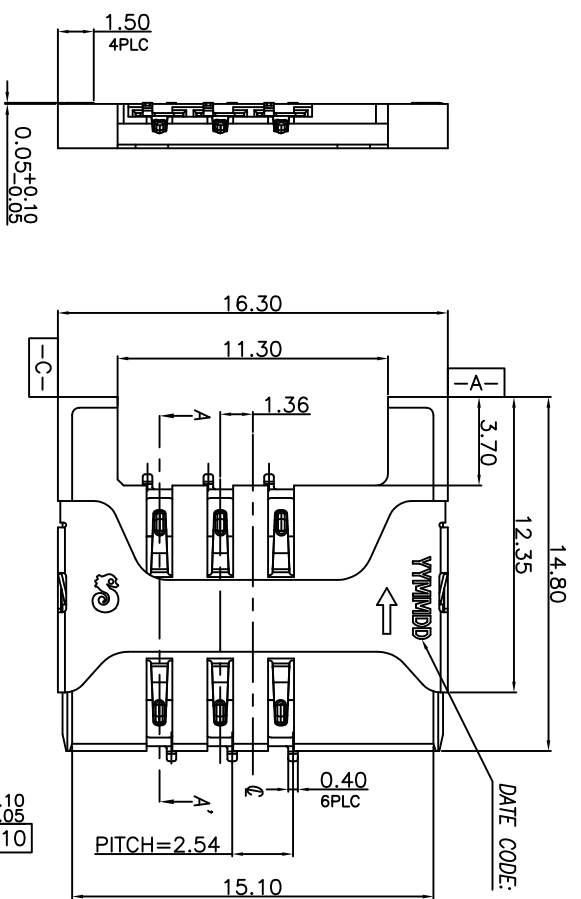

RECOMMENDED PCB LAYOUT  
(TOLERANCE: ±0.05)

1. ELECTRICAL PERFORMANCES:
- 1.1 CURRENT RATING: 0.50 A MAX.
  - 1.2 CONTACT RESISTANCE: 50 mΩ MAX.
  - 1.3 INSULATION RESISTANCE: 1000 MΩ MIN.
  - 1.4 DIELECTRIC WITHS TANDING VOLTAGE: 250V AC FOR 1 MINUTE.
2. MECHANICAL PERFORMANCES:
- 2.1 CONTACT NORMAL FORCE: 0.30N MIN. AT DEFLECTION.
  - 2.2 MECHANICAL OPERATION: 5000 CYCLES.
  - 2.3 OPERATING TEMPERATURE: -40°C TO 85°C.
3. HALOGEN FREE PRODUCT IDENTIFICATION MARK ON PRODUCT:
4. HALOGEN FREE PRODUCT IDENTIFICATION LOGO ON PACKING:
5. FOR LEAD-FREE PRODUCT:

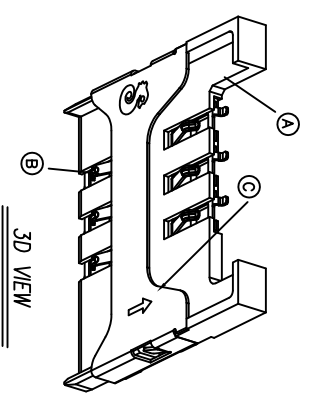

C	COVER	1	STAINLESS STEEL,T=0.15	GOLD FLASH ON SOLDER TAIL Over IN 50U "/>
B	CONTACT	6	PHOSPHOR BRONZE,T=0.12	GOLD FLASH ON CONTACT AREA AND SOLDER TAIL ALL OVER 50U "/>
A	BODY	1	HIGH TEMP-UL94V-0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singatron Enterprise Co., Ltd. 信音企業股份有限公司 <b>SIM CARD CONN.</b>				
DECIMALS:		ANGLES:		
X	:±0.5	X	:±2°	
X.X	:±0.3	X.X	:±1'	
X.XX	:±0.2			
TITLE				
DWN	Bruce	PART NO. 2SM3012-008111		
CHKD	Boye	SCALE: 6:1 UNIT: mm		
APVD	Max	SIZE: A3	SHEET: 1 OF 1	REV: A
CUSTOMER COPY				

1 2 3 4 5 6 7 8