
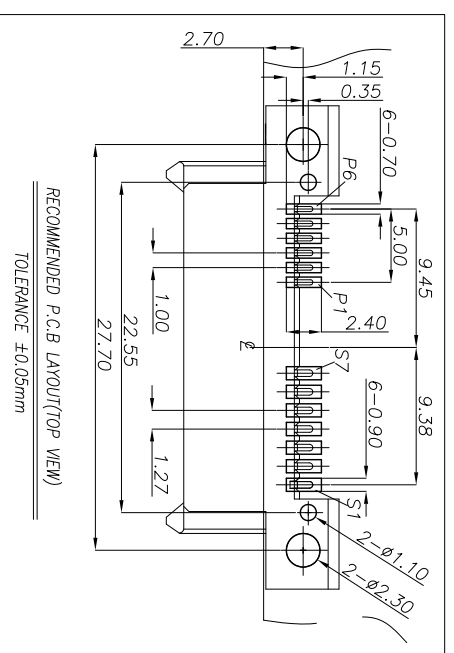
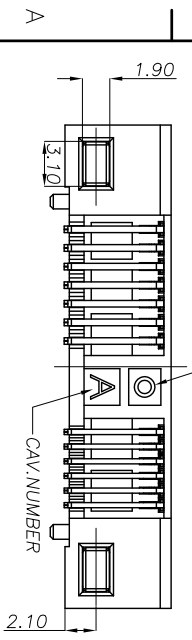
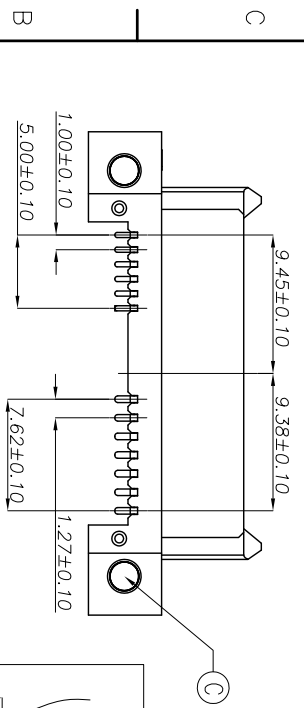
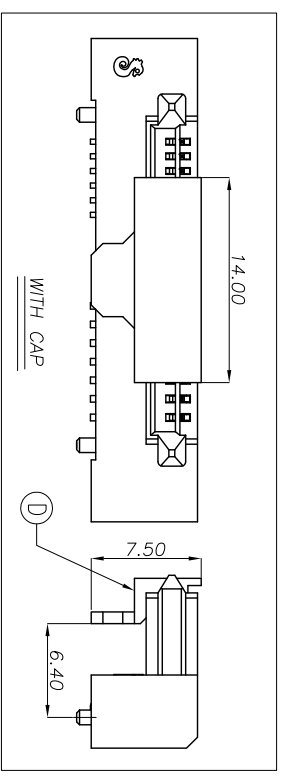
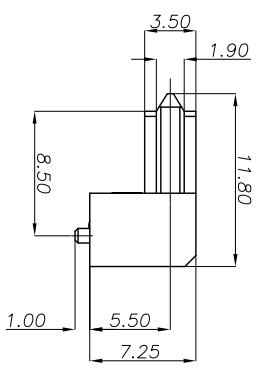
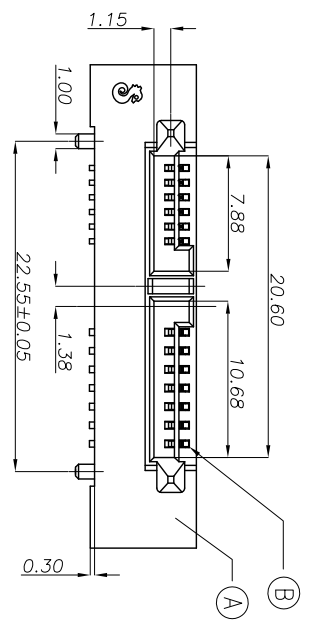


REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S110622-5A		Solder	2012.05.04
B	ECN NO.:S121217		Winnie	2013.01.09

- NOTES:
- ELECTRICAL PERFORMANCES:
    - CURRENT RATING: 1.50A, DC 150V.
    - CONTACT RESISTANCE: 50M MAX.
    - INSULATION RESISTANCE: 1000M MIN.
    - DIELECTRIC WITHS TANDING VOLTAGE: 250V AC FOR 1 MINUTE.
  - MECHANICAL PERFORMANCES:
    - CONTACT NORMAL FORCE: 0.1KG MIN. AT DEFLECTION.
    - MECHANICAL OPERATION: 300 CYCLES.
    - OPERATING TEMPERATURE: -40°C TO 85°C
  - HALOGEN FREE PRODUCT IDENTIFICATION MARK ON JACK:
  - HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING:
  - FOR REFLOW SOLDERING LEAD-FREE PROCESS.
  - SOLDERING HEAT RESISTANCE: 260°C 10 SEC.

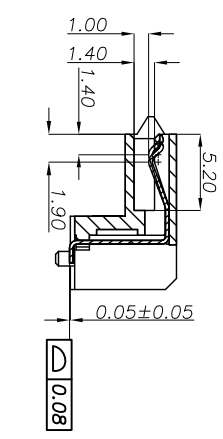

D	CAP	1	HIGH TEMP.UJ94V-0	Black
C	NUT	2	BRASS	Ni 60 um Plating Over All.
B	CONTACT-1	13	PHOSPHOR BRONZE,T=0.20	Gold Flash On Contact Area; Mat. Sn 120um On Solder Tail; All Over Ni 60um Plating.
A	BODY	1	HIGH TEMP.UJ94V-0	Black
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singtron Enterprise Co., Ltd. 信普企業股份有限公司				
TITLE: SATA 13PIN CONNECTOR				
DECIMALS:	ANGLES:			
X : ±0.5	X : ±2°			
X.X : ±0.3	X.X : ±1°			
X.XX : ±0.2				
DWN Winnie PART NO. 25T3002-013111F CHKD Yungang SCALE:4:1 UNIT: mm APVD Quan SIZE: A3 SHEET:1 OF 1 REV:B CUSTOMER COPY				