
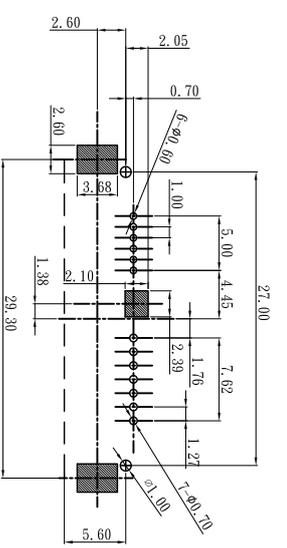
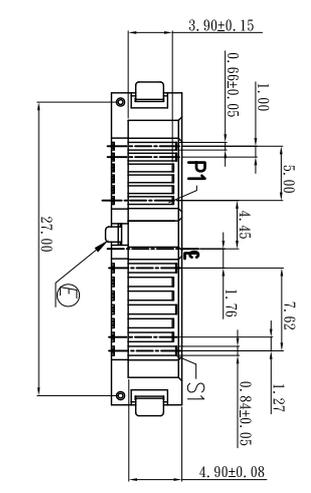

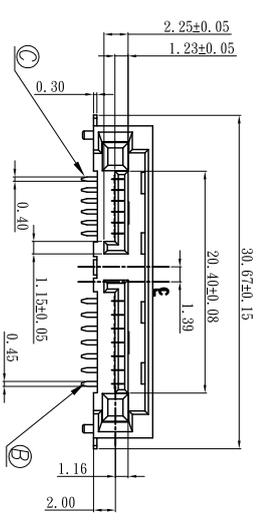


REV	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO: T131206-11A	Edi.Zhou	20140626

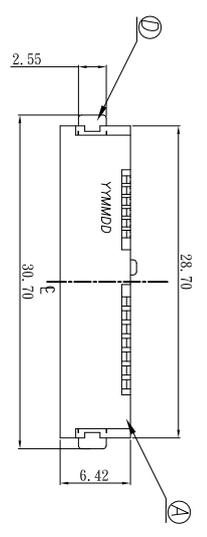

- SPECIFICATIONS:
1. ELECTRICAL CHARACTERISTICS:
- 1-1. CONTACT RESISTANCE: 30mΩ MAX.(INITIAL)
  - 1-2. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
  - 1-3. INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500 VDC
2. MECHANICAL CHARACTERISTICS:
- 2-1. INSERTION FORCE : 45N MAX.
  - 2-2. WITHDRAWAL FORCE : 10N MIN.
3. LIFE TEST: 500 CYCLES MIN.
4. OTHER GENERAL SPEC. TO REFER "2ST13Y62-000111F\_SPEC".
5. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPECIFICATION
6. HALOGEN FREE PRODUCT IDENTIFICATION LOGO ON PACKAGING: 
7. FOR REFLOW SOLDERING LEAD-FREE PROCESS.
8. PACKAGING: TAPE&REEL

E	PAD	1	BRASS T=0.30mm	MATTE-TIN 80μ" MIN PLATED OVER N: 50U MIN.
D	PAD	2	BRASS T=0.30mm	MATTE-TIN 80μ" MIN PLATED OVER N: 50U MIN.
C	TERMINAL 2	6	BRASS T=0.25mm	NO TOL MIN ON CONTACT AREA. MATE-TIN 100μ" MIN ON SOLDER TAIL. ALL OVER N: 50U MIN.
B	TERMINAL 1	7	LCP HF, UL 94V-0	BLACK
A	HOUSING	1	MATERIAL	PLATING & COLOR
NO	DESCRIPTION	QTY		
UNLESS OTHERWISE SPECIFIED TOLERANCES				
 Singatron Enterprise Co., Ltd. 信營企業股份有限公司				
DECIMALS: ANGLES:				
X	: ±0.5	X	: ±2°	
X.X	: ±0.3	X.X	: ±1°	
X.XX	: ±0.2			
TITLE: ODD 7+6P PLUG 5.4H 10U" AU				
DWG: Edi.Zhou PART NO: 2ST13Y62-000111F				
CHKD: Boye SCALE: 2:1 UNIT: mm				
APVD: Boye SIZE: A3 SHEET: 1 OF 1 REV: A				
CUSTOMER COPY				

1 2 3 4 5 6 7 8

文#總#00-06-043-A