


1	ORANGE/WHITE	1	
2	ORANGE	2	TWIST
3	GREEN/WHITE	3	
4	BLUE	5	TWIST
5	BLUE/WHITE	4	TWIST
6	GREEN	6	
7	BROWN/WHITE	7	TWIST
8	BROWN	8	
CONN.1 WIRE COLOR		CONN.2	
PIN OUT			

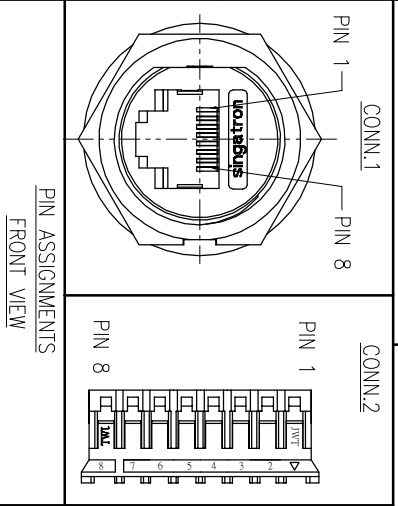

REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:	T200915-4A	JAY	2021.04.20

K	TERMINAL	8	JWT A2001T0*-2	TIN-PLATED
J	HOUSING	1	JWT A2001H02-8P	WHITE
I	CABEL	1	CAT5E FTP 24#*4P+MY+D +A/M UV RESISTANT	BLACK(PVC JACKET)
H	TUBE	2	125°C 300V	BLACK
G	LIQUID GLUE	2	N/A	BLACK
F	SCREW	1	STAINLESS STEEL	N/A
E	GASKET	1	EPDM	BLACK
D	NUT	1	NYLON66+33%GF	BLACK
C	GROUND	2	BRASS	NICKEL PLATING 60U"
B	CRJ45	1	Phosphor Bronze+Plonic	GOLD PLATING 60U"MIN
A	HOUSING	1	NYLON	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Suzhou Singatron Auto Electronics CO.,LTD. 蘇州信音汽車電子有限公司				
TITLE R445 FRONT MOUNT CONN.+HOUSING				
DWG JAY PART NO.2173003-W051L8H				
CHKD Cerry SCALE 2:1 UNIT: mm				
APVD William SIZE: A3 SHEET: 1 OF 1 REV: A				
CUSTOMER COPY				

- NOTES:
1. WATERPROOF RATE: IP67
  2. ELECTRICAL CHARACTERISTICS:
    - 2-1. RATING:125V 1.5A
    - 2-2. CONTACT RESISTANCE: 3 ohm MAX.(INITIAL)
    - 2-3. DIELECTRIC WITHSTANDING VOLTAGE: 300V AC FOR ONE MINUTE
    - 2-4. INSULATION RESISTANCE: 30Mohm MIN. MEASURED BY 300 VDC
  3. OTHER GENERAL SPEC. TO REFER "RJ45 SERIES SPEC".
  4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
  5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:
  6. FOR PANEL THICKNESS MAX OF 5.5mm