


TUBE 3(管号)	TUBE 2(管号)	TUBE 1(管号)	(管数)PART NO.	1"mm
DIA	485	485	2TJ3003-W051M3H	L=115+15/-0



1	ORANGE/WHITE	8	
2	ORANGE	7	
3	GREEN/WHITE	6	
4	BLUE	5	
5	BLUE/WHITE	4	
6	GREEN	3	
7	BROWN/WHITE	2	
8	BROWN	1	
CONN.1 WIRE COLOR		CONN.2	
PIN DEFINE			
CONN.1		CONN.2	

1	TWIST
2	TWIST
3	TWIST
4	TWIST
5	TWIST
6	TWIST
7	TWIST
8	TWIST

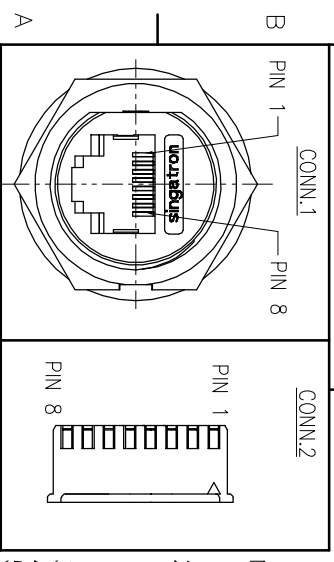

REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A	ECN NO.:S202208-C21	Erod		2022.10.19

K	TERMINAL	8	JWT A2501TP-00	GOLD-PLATED
J	HOUSING	1	JWT A2512H0-8P	WHITE
I	CABEL	1	CAT5E FTP 24#*4P+MY+D +A/M UV RESISTANT	BLACK(PVC JACKET)
H	TUBE	3	Ø7.0 125°C 300V	WHITE
G	LIQUID GLUE	2	N/A	BLACK
F	SCREW	1	STAINLESS STEEL	N/A
E	GASKET	1	EPDM	BLACK
D	NUT	1	NYLON66+33%GF	BLACK
C	GROUND	2	BRASS	NICKEL PLATING 60U"
B	CRJ45	1	Phosphor Bronze+Plonic	GOLD PLATING 60U"MIN
A	HOUSING	1	NYLON	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMersed IN 1M WATER FOR 30 MINUTES
 2. ELECTRICAL CHARACTERISTICS:
2-1. RATING:125V 1.5A
2-2. CONTACT RESISTANCE: 3 ohm MAX.(INITIAL)
2-3. DIELECTRIC WITHSTANDING VOLTAGE: 300V AC FOR ONE MINUTE
2-4. INSULATION RESISTANCE: 30Mohm MIN. MEASURED BY 300 VDC
 3. OTHER GENERAL SPEC. TO REFER "RJ45 SERIES SPEC".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:
 6. FOR PANEL THICKNESS MAX OF 5.5mm

PIN ASSIGNMENTS
FRONT VIEW