



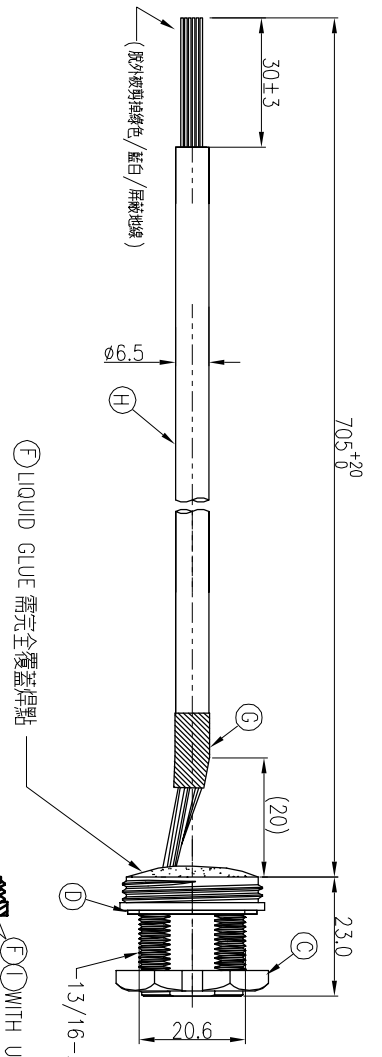


REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:	A201230-2F	RZ	2021.04.30
B	ECN NO.:	S202209-C05	JAY	2022.09.14

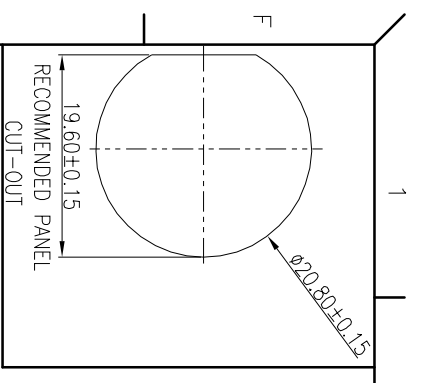

CONN.1
WATERPROOF RATE: IP67

1	ORANGE/WHITE	TWIST
2	ORANGE	TWIST
3	GREEN/WHITE	TWIST
4	BLUE	TWIST
4	BLUE/WHITE	TWIST
7	BROWN/WHITE	TWIST
8	BROWN	TWIST
CONN.1	WIRE COLOR	
	PIN OUT	
	CONN.1	

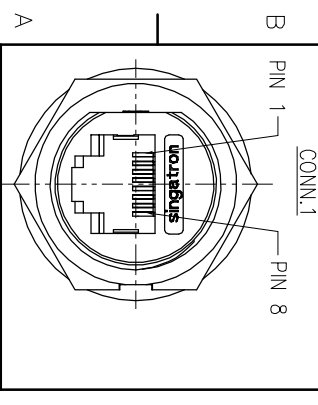

PIN ASSIGNMENTS	
FRONT VIEW	

- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
 2. ELECTRICAL CHARACTERISTICS:
 - 2-1. RATING:125V 1.5A
 - 2-2. CONTACT RESISTANCE: 3 ohm MAX.(INITIAL)
 - 2-3. DIELECTRIC WITHSTANDING VOLTAGE: 300V AC FOR ONE MINUTE
 - 2-4. INSULATION RESISTANCE: 30Mohm MIN. MEASURED BY 300 MINUTE
 3. OTHER GENERAL SPEC. TO REFER "RJ45 SERIES SPEC".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:
 6. FOR PANEL THICKNESS MAX OF 5.5mm

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
I	UV GLUE	1	N/A	NATURAL
H	CABEL	1	CAT5E FTP 24#*4P+MY+D +A/M UV RESISTANT	BLACK(PVC JACKET)
G	TUBE	1	125°C 300V L=20mm	BLACK
F	LIQUID GLUE	2	N/A	BLACK
E	SCREW	1	STAINLESS STEEL	N/A
D	GASKET	1	SILICONE	BLACK
C	NUT	1	NYLON	BLACK
B	RJ45+PCB	1	Phosphor Bronze+Plastic	GOLD PLATING 6U"
A	HOUSING	1	NYLON	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X : ±0.5	X : ±2°
X.X : ±0.3	X.X : ±1'
X.XX : ±0.2	

Suzhou Singatron Auto Electronics CO.,LTD.
蘇州信音汽車電子有限公司

PART NO.: 2133003-W051P3H

SCALE: 2:1 UNIT: mm

SIZE: A4 SHEET: 1 OF 1 REV: B

CUSTOMER COPY