


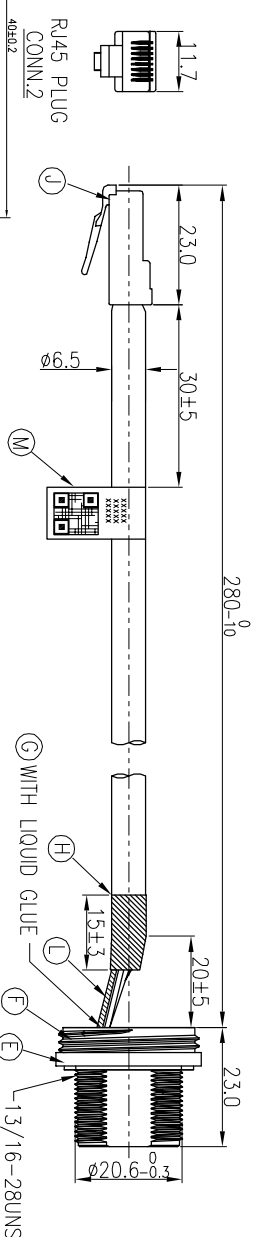


REV. A	ECN NO. OR DESCRIPTION	PDR NO.:A210302-2A	REVISED	DATE
			JAY	2021.07.23

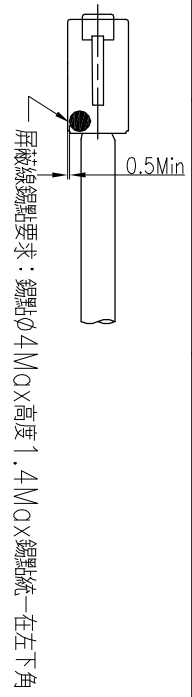

CONN.1  
WATERPROOF RATE: IP67




LABEL DETAIL  
SCALE:2/1  
RJ45 PLUG  
CONN.2




SHEET	DRAIN	SHEET
8	ORANGE/WHITE	8
7	ORANGE	7
6	GREEN/WHITE	6
5	BLUE	5
4	BLUE/WHITE	4
3	BROWN/WHITE	3
2	BROWN	2
1	BROWN	1


- NOTES:
1. WATERPROOF RATE: IP67  
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
  2. RATING:125V 1.5A
  3. OTHER GENERAL SPEC. TO REFER "RJ45 SERIES SPEC."
  4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
  5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:
  6. FOR PANEL THICKNESS MAX OF 5.5mm
  7. Bar code printing:  
THE BARCODE SHALL BE PRINTED BY THE MANUFACTURER ACCORDING TO THE SHIPMENT SCHEDULE, AND THE PRODUCTION SCHEDULE SHALL BE PRINTED DURING THE PRODUCTION CYCLE.  
THE FLOW CODE IN THE BAR CODE IS ARRANGED FROM 00001 TO THE LAST ONE OF THE PRPDUTION IN THE SAME WEEK ACCORDING TO THE PRODUCTION QUANTITY OF THE FILE WEEK.

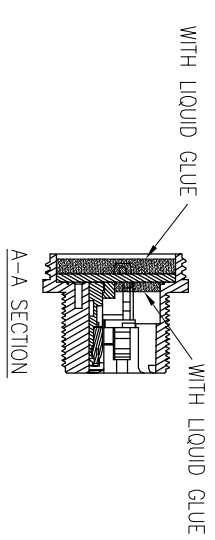

12.0  
Incidental but not assemble

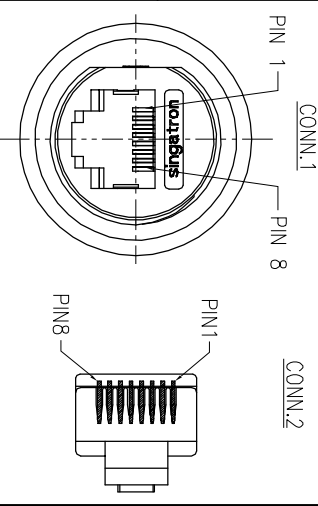

PIN ASSIGNMENTS  
FRONT VIEW

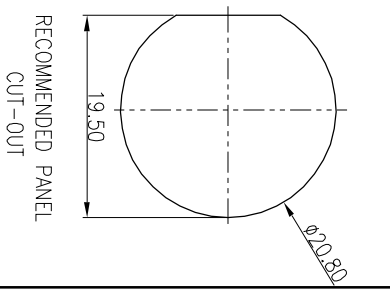

RECOMMENDED PANEL  
CUT-OUT

1 2 3 4 5 6 7 8

M	LABEL	1	L40*W10mm	WHITE
L	TUBE	1	∅1.0 125°C 300V	BLACK
K	WATERPROOF CAP	1	P/N:ZUB3001-W0000W	BLACK
J	RJ45 PLUG	1	8P8C SHIELD	Au 15μ ON CONTACT AREA
I	CABEL	1	CAT5E FTP 24#*4P+MY+D +A/M UV RESISTANT	BLACK(PVC JACKET)
H	TUBE	1	∅6.0 125°C 300V	BLACK
G	LIQUID GLUE	1	N/A	BLACK
F	SCREW	1	STAINLESS STEEL	N/A
E	GASKET	1	EPDM	BLACK
D	NUT	1	PPE	BLACK
C	GROUND	2	BRASS	NICKEL PLATING 60μ
B	CRJ45	1	N/A	Au 15μ ON CONTACT AREA
A	HOUSING	1	NYLON+30%GF 94V-0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:  
X :±0.5 X :±2°  
X.X :±0.3 X.X :±1°  
X.XX :±0.2

TITLE R45 SHIELDED JACK + PLUG  
DWN JAY PART NO.2173003-W051P5H  
CHKD JF SCALE 2:1 UNIT: mm  
APVD JF SIZE: A3 SHEET: 1 OF 1 REV: A

CUSTOMER COPY

Suzhou Singatron Auto Electronics CO.,LTD.  
蘇州信音汽車電子有限公司