

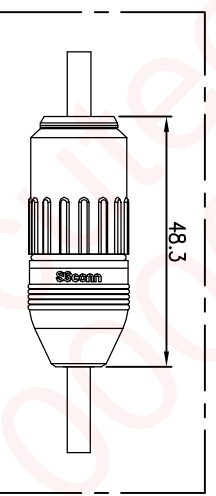


REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S150513-1A	Vicky		2015.09.02
B	ECN NO.:S160629-C	Vicky		2016.06.02

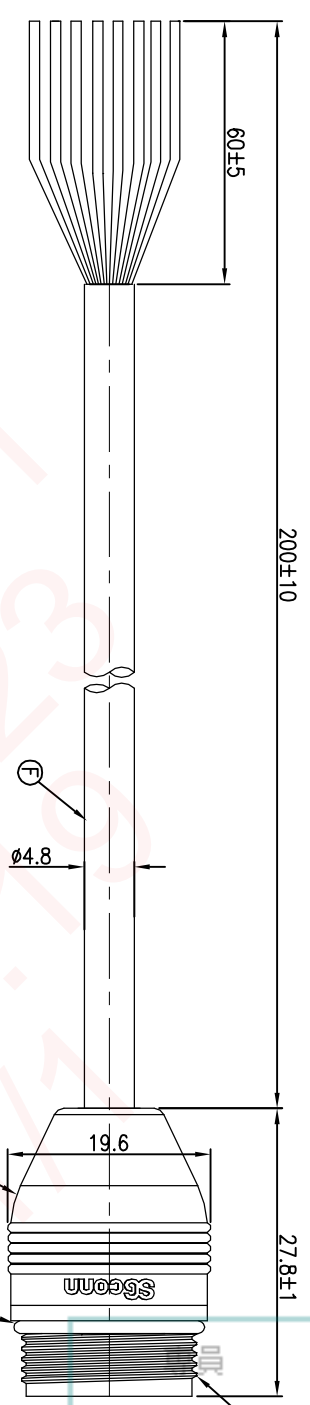

WIRE COLOR	CONN.1
BROWN	8
BROWN/WHITE	7
GREEN	6
BLUE/WHITE	5
BLUE	4
GREEN/WHITE	3
ORANGE	2
ORANGE/WHITE	1



PIN ASSIGNMENTS
FRONT VIEW

- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
 2. ELECTRICAL CHARACTERISTICS:
 - 2-1. RATING:125V 1.5A
 - 2-2. CONTACT RESISTANCE: 3 ohm MAX.
 - 2-3. DIELECTRIC WITHSTANDING VOLTAGE: 750V AC FOR ONE MINUTE
 - 2-4. INSULATION RESISTANCE: 30M ohm MIN. MEASURED BY 300 VDC
 3. OTHER GENERAL SPEC. TO REFER "RJ45 SERIES SPEC".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

CODE	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
G	O-RING	1	SILICONE	BLUE
F	CABEL	1	NONUL 4P*26AWG OD:4.8mm	BLACK(PVC JACKET)
E	OVER MOLD	1	TPU	BLACK
D	INNER MOLD	1	PVC	BLACK
C	LIQUID GLUE	1	N/A	BLACK
B	RJ45+PCB	1	N/A	N/A
A	HOUSING	1	PC	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X :±0.5	X :±2°
X.X :±0.3	X.X :±1°
X.XX :±0.2	

Singatron Enterprise Co., Ltd.
信登企業股份有限公司

TITLE WATERPROOF RJ45 JACK,PVC CABLE
DWG Vicky PART NO.2713005-W05113H
CHKD Harlen SCALE 2:1 UNIT: mm
APVD Steve SIZE: A3 SHEET:1 OF 1 REV: B

CUSTOMER COPY