
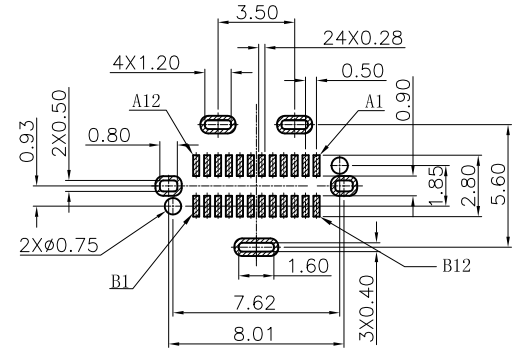

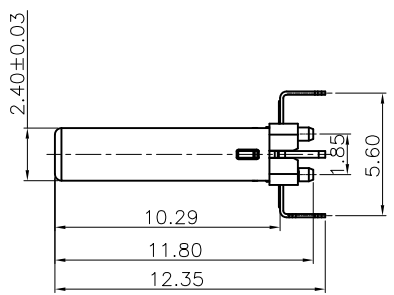


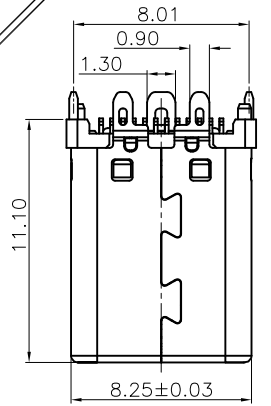


REV	ECN No.	DATE	REMARK
A0	NEW	2016.11.05	新版发行




RECOMMENDED PCB LAYOUT(L=0.80±0.05)
COMPONENT SIDE(GENERAL TOLERANCE:±0.05)

NOTES:

SPECIFICATION:

- CURRENT RATING: 3.0A MAX
- VOLTAGE: 100 VAC
- TEMPERATURE RANGE: -30 °C ~ 85 °C
- CONTACT RESISTANCE: 40 MILLIONHM MAX
- INSULATION RESISTANCE: 100 MEGOHMS MIN.
- INSERTION FORCE : 5N~20N
- UNMATING FORCE: 8N~20N
- DURABILITY: 10,000 CYCLES

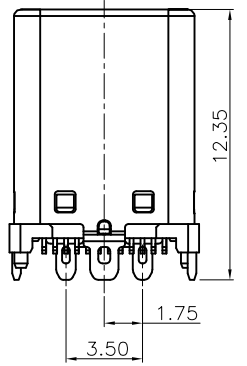

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

TABLE:

2UB-CM026SLB01R-A-01	6	COVER	LCP UL94V-0	BLACK	1PCS	24H	Reel	
	5	SPRING	SUS304 T=0.10mm	---	2PCS			
	4	LATCH	SUS301 T=0.30mm	Tin 80u" Min Plated	1PCS			
	3	SHELL	SUS304 T=0.15mm	Ni 50u" Min Plated	1PCS			
	2	CONTACT	C7025 T=0.15	100% PLATING ON CONTACT AREA THE "85u" MIN THK ON SOLDER TAIL IN 50u" Min UNDERPLATING OVERALL	1SET			
	1	HOUSING	LCP UL94V-0	BLACK	2PCS			
PART NUMBER		NO.	DESCRIPTION	MATERIAL	REMARKS	QTY	品号	包装

GENERAL TOLERANCES (UNLESS SPECIFIED)	
x.xxxx	± ---
x.xxx	± 0.10
x.xx	± 0.25
x.x	± 0.30
ANGULAR	± --°

Singatron Enterprise Co., Ltd.

TITLE: USB C M TYPE 直立式三支脚, 脚距1.75

DWN SAM2016.11.05 PART NO. 2UB-CM026SLB01R-A-01

CHKD TDM2016.11.05 SCALE 1:1 UNIT: mm

APVD PETER2016.11.05 SIZE: A3 SHEET: 1 OF 1 REV: A0

CUSTOMER COPY