

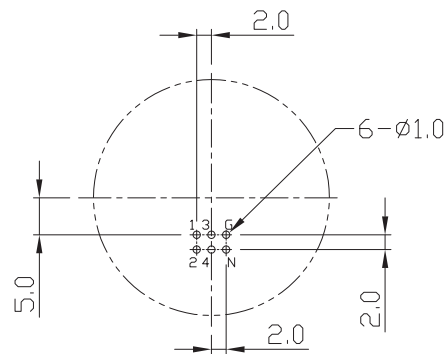
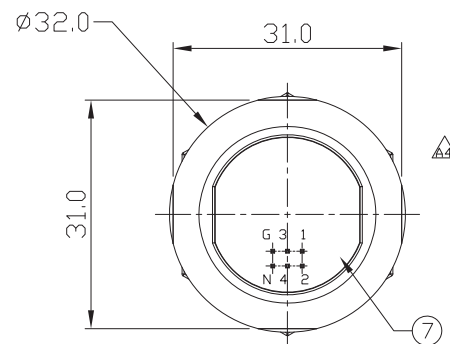


Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP67.
2. Recommend Panel Thickness: 0.8 to 6.0 mm.
3. Recommend Torque: 19~20 Kgf-cm.
4. Mating Cap P/N: GT1C1110X2.
5. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A2	ECN-101013	Marked	David 10/26/10	Ray 10/26/10	Ray 10/26/10
A3	ECN-110609	Marked	Joyce 06/28/11	Lucas 06/28/11	Ray 06/28/11
A4	ECN-140209	Marked	Joyce 02/20/14	Lucas 02/20/14	Ray 02/20/14

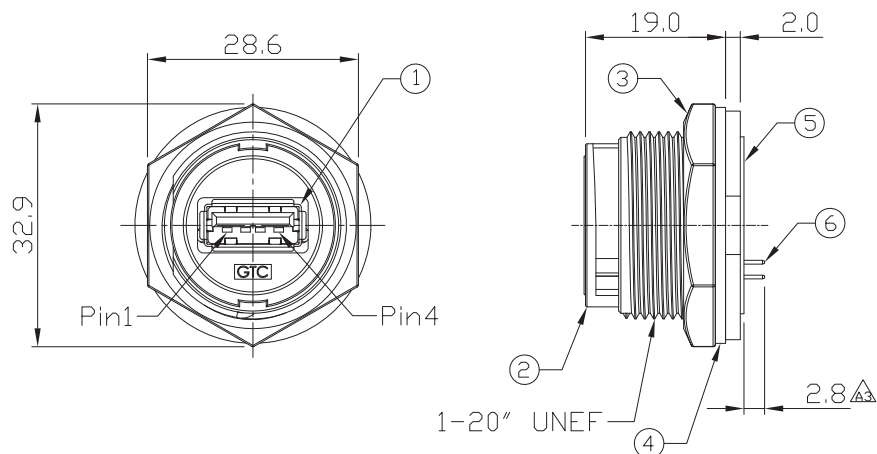

Recommend  
Panel Cut-Out

Recommend PCB Layout

7	Glue	Epoxy Color: Black	
6	Pin Header	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated	1
5	PCB	FR-4 Color: Green	1
4	Gasket	Silicone Color: Black	1
3	Hex Nut	Thermoplastic Color: Black	1
2	Housing	Thermoplastic Color: Black	1
1	USB-A Receptacle	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Copper Alloy, Finish: Ni Plated	1
Item	Part Name	Material / Finish	Q'TY

TITLE USB-A Plastic C4 Panel Jack Dip Lock						DRAWING NUMBER 2UB-GT111200-10			REV. A4	
DO NOT SCALE DRAWINGS	B	1:1	Edwin 02/01/10	Ray 02/01/10	Ray 02/01/10	X.X X.XX	± 0.5 ± 0.2	X.XXX ANGLES	± 0.05 ± 1°	mm
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES			UNIT	SHEET

SINGATRON U.S.A.